



_						
	Date	SYM	REVISION RECORD	AUTH	DR.	CK.
	07/12/13	В	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
	05/12/17	С	DIM. 108.4 WAS 108.46 ADDED MOUNTING HOLES	T.B.	B.S.	

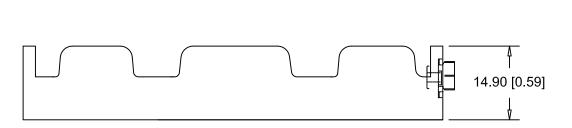



SPECIFICATIONS:

Plastic material - polypropylene

Flammability Rating-UL94 HB, UL File No. E216959

Temperature RangeE: -10°C to +100°C Springs - nickel plated spring steel

Rivets - Brass, nickel plated 9V Snaps: Brass, nickel plated

Contact Resistance: Under $50m\Omega$ for +/- contacts per EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc							
(,	200 Broad Hollow Road, Farmingdale, New York 11735							
decimal			Scale	Drawn By B.S.				
±.5 (.020)				Approved By T.B.				
Fractional	Title	22 0						
± .8 (.030)	FOUR "AA" CELL HOLDER WITH SNAP FASTENERS							
Angular	Date	Drawing Number						
± 3°	05/12/17	BH34AASF						