

## MOSFET BASED DC SOLID-STATE RELAY

- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ Low output leakage current.
- ▶ Low control current consumption.
- ▶ Built-in overvoltage protection
- ▶ Reverse protected triggered control input to avoid linear control risks
- ▶ No radiated or conducted disturbances
- ▶ Touch protected housing IP20





SOM02060



Control voltage range	3.5-32VDC
Max. permanent output voltage	40VDC
Max. load current with heatsink	20ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
5-40VDC	Up to 20A (with heatsink)	3.5-32VDC	2.5kV	Screw terminals	45 x 58.5 x 30	80g

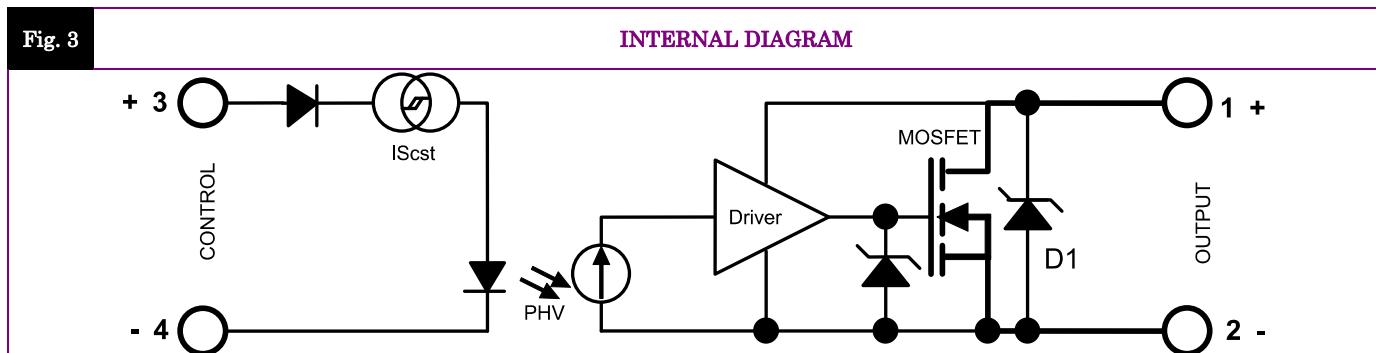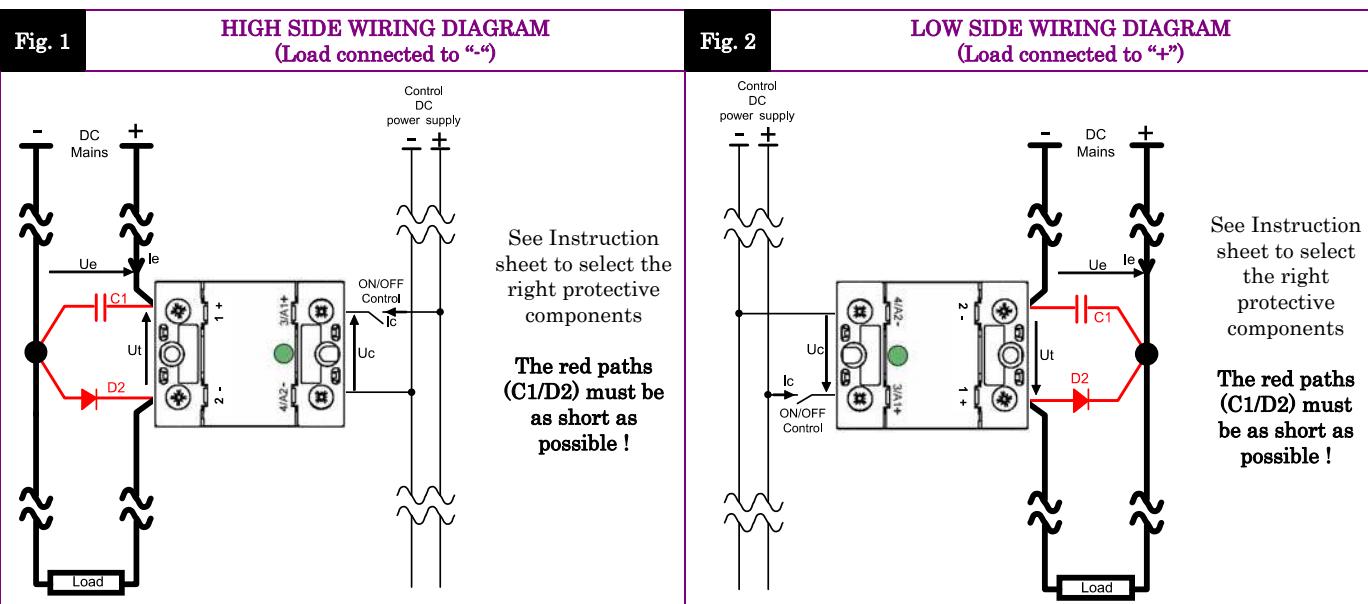

Proud to serve you

## CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nom. Control voltage	Ucnom	12-24VDC	
	Min. Control current	Icmin	35mA DC	-100µA/°C
	Control voltage range	Uc	3.5 - 32VDC	typical ON=3.3V
	Control current consumption	Ic	32 - 35mA DC (for control voltage range)	See fig. 5
	Releasing control voltage	Ucoffmax	1VDC	typical OFF= 2.6V
	Max. reverse control voltage	-Ucmax	32VDC	-Icmax<100µA
	Input impedance	Rin	Current limitation	See fig. 5

## POWER OUTPUT CHARACTERISTICS

POWER CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nominal voltage	Uenom	24VDC	
	Voltage range	Ut    Ue	5-40VDC	
	Non-repetitive peak voltage	Utp	60V	
	Overvoltage protection	D1	Transient voltage suppressor 39V (1500W/1ms)	
	Max reverse voltage drop (internal diode at OFF state)	-Ut	1.5V	@Ie=55A @Uc=0
	Maximum nominal currents	Ie max	Resistive                  Motor 20A                  Please contact us	See fig. 7 (limits)
	Non-repetitive peak overload current	Id max	200A	See fig. 8
	Min. load current	Iemin	5mA	
	Max. leakage current	Ielk max	3mA	@Utmax @Tjmax
	Max. on-state resistance	RDSon	36mΩ	@Iemax @Tjmax
	Typ. output capacitance	Cout	0.3nF	
	Junction/case thermal resistance per power element	Rthjc	1.8K/W	
	Built-in heatsink thermal resistance vertically mounted	Rthra	10K/W	@ΔTra=75°C
	Heatsink thermal time constant	Tthra	10 minutes	@ΔTra=40°C
	Control inputs/power outputs insulation voltage	Uimp	2.5kV	
	Inputs/case insulation voltage	Uimp	2.5kV	
	Outputs/case insulation voltage	Uimp	2.5kV	
	Isolation resistance	Rio	1GΩ	
	Isolation capacitance	Cio	<8pF	
	Maximum junction temperature	Tjmax	175°C	
	Storage ambient temperature	Tstg	-40->+100°C	
	Operating ambient temperature	Tamb	-25->+90°C	See fig. 7
	Max. case temperature	Tc	100°C	


## PROTECTION CHARACTERISTICS

PROTECTION	Leakage current (Ielk) vs DC voltage (Ut)	Absolute limits
	<p>Ielk : Leakage current of the relay Ie : User load nominal current Utp : Relay max. non repetitive peak voltage</p>	<p><u>Absolute limits</u></p> <p>Uto &lt; Utp</p> $t_{\text{max}} = \frac{0.75}{(U_{\text{to}} - U_{\text{t max}}) \times I_e}$ $P_{(\text{protection})} = 1W_{\text{max}}$ $\Rightarrow \frac{(U_{\text{to}} - U_{\text{t max}}) \times I_e \times t}{T} \leq 1$
	<p>Utn : Max. nominal voltage of the relay Uto : Possible overvoltage above Utmax Utn = Ue : User DC power supply voltage</p>	<p>t : Overvoltage duration T : Time between 2 overvoltages</p>

## TIME CHARACTERISTICS

Fig. 4

## TIME DIAGRAMS

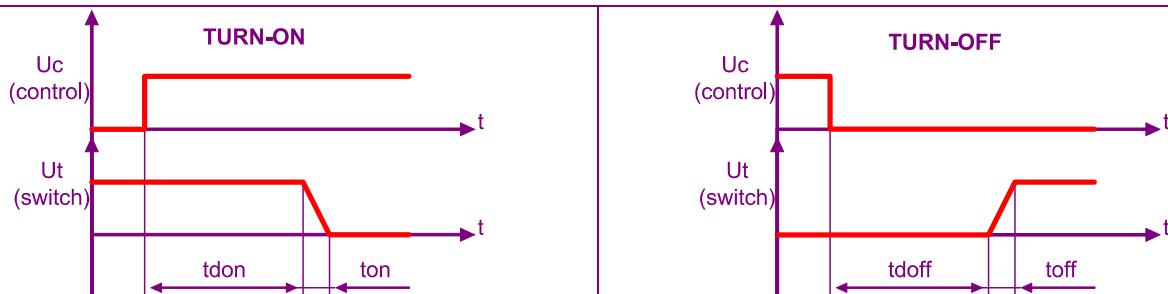

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	ton	20µs	
	Turn on delay	tdon	20µs	
	Turn off time	toff	20µs	
	Turn off delay	tdoff	20µs	
	Max. On-Off frequency	F(on-off)	>1000Hz (for high frequency, take 2 x Ie to calculate the heatsink; the protections must be chosen carefully)	Refer to the instruction sheet

## GENERAL INFORMATION

MISC.	Display		Green LED (indicates relay has switched ON)	
	Housing		UL94V0	
	Mounting		2 screws (M4x12mm ; tightening = 1.2N.m)	See mounting sheet
	Noise level		None	
	Weight		80g	

## STANDARDS

GENERAL	Standards		IEC60947-1	
	Protection level		IP20	
	Protection against direct touch		Yes	
	CE marking		Yes	
	UL, cULUS		Yes	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	Fast transients bursts	EN61000-4-4	4kV criterion B	
	Electric shocks	EN61000-4-5	1kV criterion B	
	Voltage drop	EN61000-4-11	-	

## CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

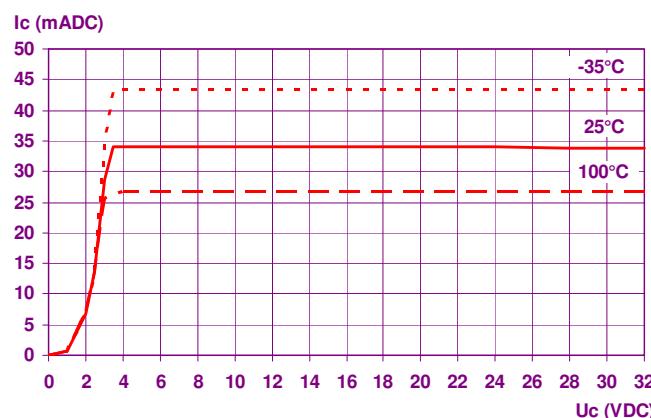


Fig. 6

ON RESISTANCE VS JUNCTION TEMPERATURE

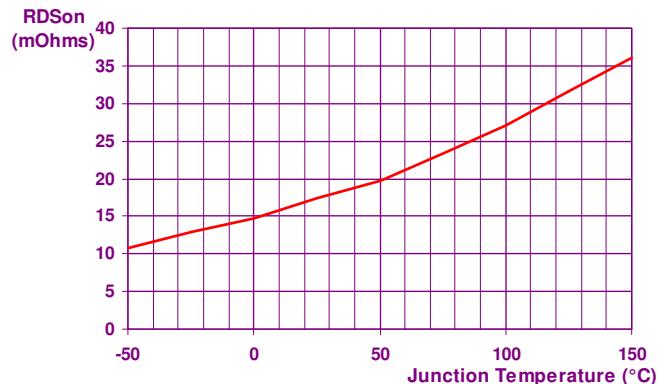
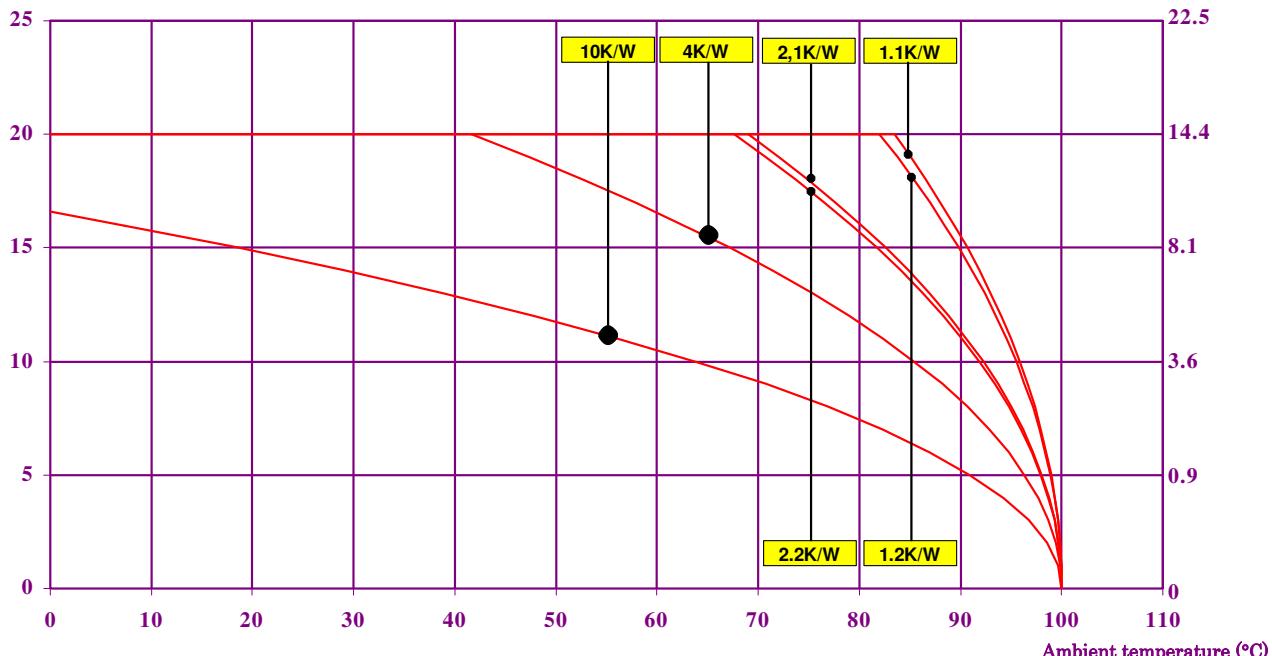


Fig. 7



POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

Permanent current  
 $I_e$  (ARMS)Please refer to the installation notice for precautions about  
mounting the device on a heatsink.Power dissipated  
(W)10K/W = No Heatsink  
2.1K/W = WF210004K/W = 150x150x3mm aluminium sheet  
1.2K/W = WF1210002.2K/W = WF262100  
1.1K/W = WF131100

2.2K/W = WF151200

Fig. 8

PEAK OVERLOAD CURRENT vs. PULSE DURATION CHARACTERISTIC

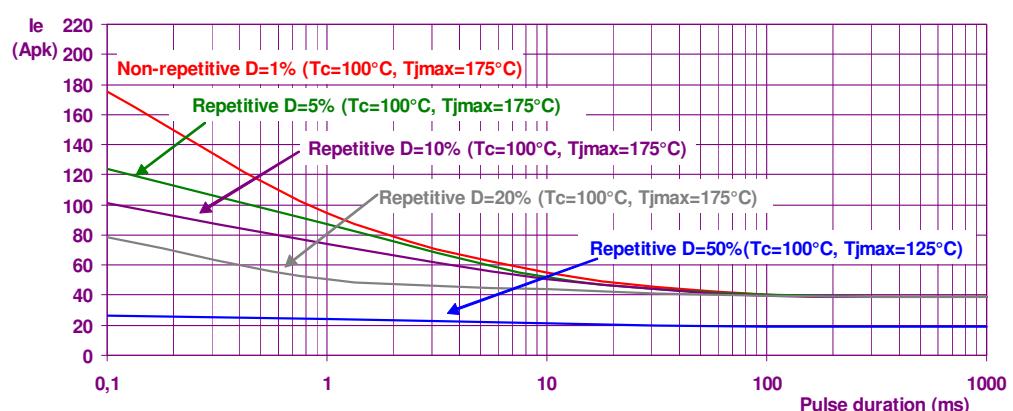

## CONNECTIONS

Direct connection with wires with or without ferrules



With ring terminals

okpac®				Control wiring			
Number of wires				Screwdriver type	Recommended tightening torque M4 screw  N.m		
1		2					
SOLID (No ferrule)	FINE STRANDED (With ferrule)	SOLID (No ferrule)	FINE STRANDED (With ferrule)				
0,75 ... 2,5 mm² AWG18...AWG14	POZIDRIV 2	Mini 1,2 / Typ 1.5 / Max 2					

okpac®				Power wiring			
Number of wires				Modèle de tournevis / Screwdriver type	Recommended tightening torque M5 screw  N.m		
1		2					
SOLID (No ferrule)	FINE STRANDED (With ferrule)	SOLID (No ferrule)	FINE STRANDED (With ferrule)				
1,5 ... 10 mm² AWG16...AWG8	1,5 ... 6 mm² AWG16...AWG10	1,5 ... 10 mm² AWG16...AWG8	1,5 ... 6 mm² AWG16...AWG10	POZIDRIV 2	Mini 2 / Typ 2.4 / Max 3		

Power with ring terminals.


W max =12,6mm

16 mm² (AWG6)

25 mm² (AWG4)

35mm² (AWG2 /AWG3)

50mm² (AWG0 /AWG1)



Suitable ring terminals and special kit for high current can be delivered; see high power SSR and data-sheet for power connection.

IP20 flaps

Flaps are delivered mounted on the relay.


Labels

Marking labels are available, for mounting on flaps.  
Part number : 1MZ09000 (delivered per 200 parts)FASTONS: Consult us

## DIMENSIONS AND ACCESSORIES

Fig.  
12

## DIMENSIONS (mm)

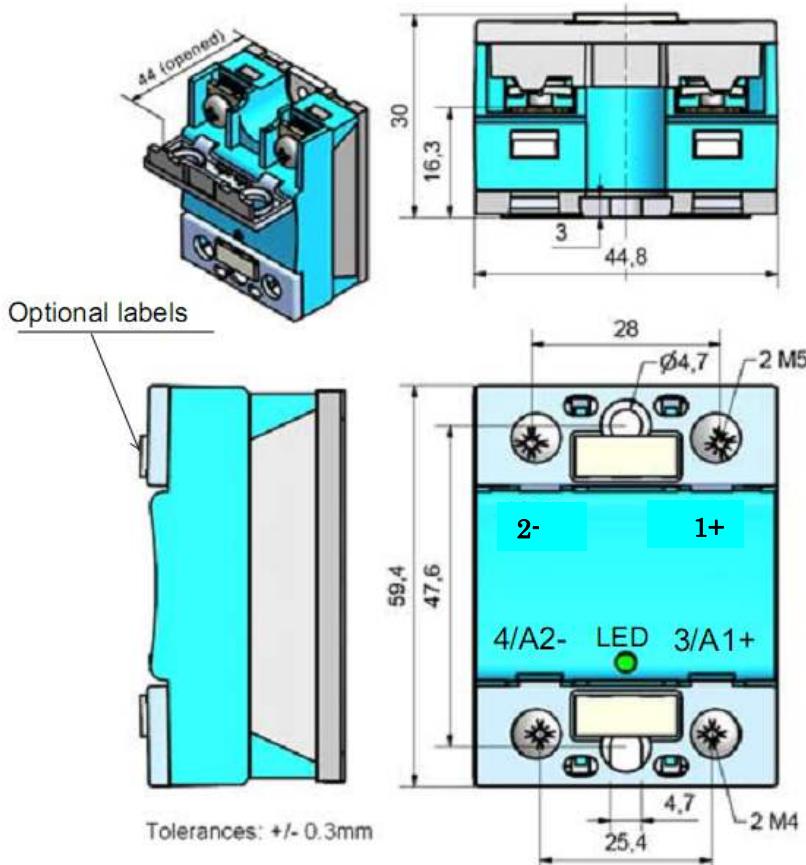CAD documents : [www.celduc-relais/uk/plan3D.asp](http://www.celduc-relais/uk/plan3D.asp)


## ACCESSORIES

READY TO USE OVERVOLTAGE PROTECTION  
ESO01000

(Please check our website for availability)

This device includes a diode (D2) and a capacitor (C1) suitable for most of the DC application.

To be mounted close to the SOM.

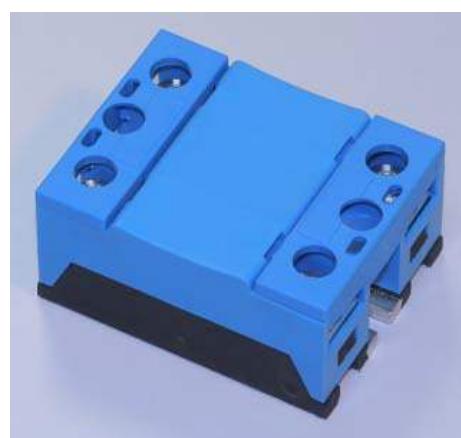

Please consult our website for other accessory references  
(Heatsinks, mounting adaptors, thermal grease...)