

QT-Brightek Chip LED Series

SMD 0603 BI-Color LED

Part No.: QBLP601-YAG1

Table of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
Characteristic Curves.....	5
Solder Profile & Footprint.....	7
Packing	8
Ordering Information	9
Revision History	10
Disclaimer	10

Introduction

Feature:

- Water clear lens
- Package in tape and reel
- Ultra bright 0603 LED package
- AlInGaP technology for yellow (Y)
- InGaN technology for yellow green (AG)
- Viewing angle: 140 deg typ.

Description:

These ultra bright 0603 YAG bi-color LEDs have a height profile of 0.55mm. Combination of high brightness output and small footprint, these LEDs are ideal for keypad backlighting, status indication, and color mixing applications.

Application:


- Status indication
- Back lighting application

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant



Dimension:

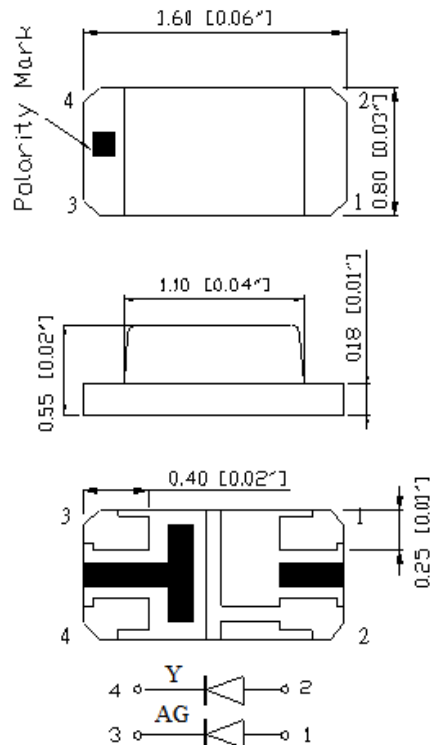

Units: mm / tolerance = +/-0.1mm

Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	I _F (mA)	V _F (V)		λ _D (nm)			I _v (mcd)	
			Typ.	Max	Min.	Typ.	Max.	Min.	Typ.
QBLP601-YAG1	Yellow	20	2.0	2.5	585	590	595	100	160
	Yellow Green	20	2.0	2.5	565	572	576	40	63

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SO L} (°C)**
AllnGaP	75	30	125	5	-40 ~ +80	-40 ~ +85	260

*Duty 1/8 @ 1kHz

**IR Reflow for no more than 10 sec @ 260 °C

Forward Voltage V_F for AllnGaP @ I_F=20mA

Bin	Min.	Max.	Unit
□	1.7	2.5	V

Luminous Intensity I_v for Yellow @ I_F=20mA

Bin	Min.	Max.	Unit
H2	100	160	mcd
I2	160	250	

Luminous Intensity I_v for Yellow Green @ I_F=20mA

Bin	Min.	Max.	Unit
F2	40	63	mcd
G2	63	100	

Dominant Wavelength λ_D for Yellow (Y) @ I_F=20mA

Bin	Min.	Max.	Unit
m	585	590	nm
n	590	595	


Dominant Wavelength λ_D for Yellow Green (AG) @ I_F=20mA

Bin	Min.	Max.	Unit
h	565	568	nm
l	568	572	
j	572	576	


Characteristic Curves

Yellow


Forward Current vs. Forward Voltage

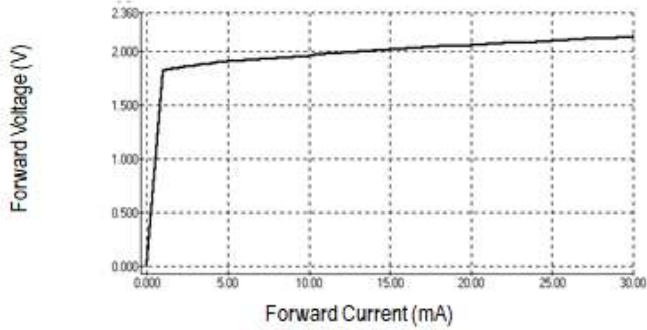

Relative Intensity vs. Wavelength

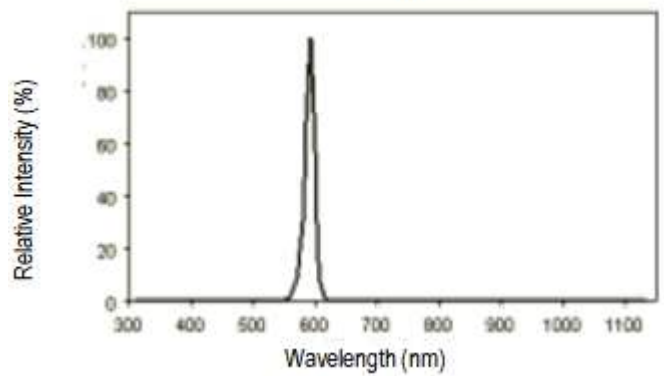


Directive Characteristics

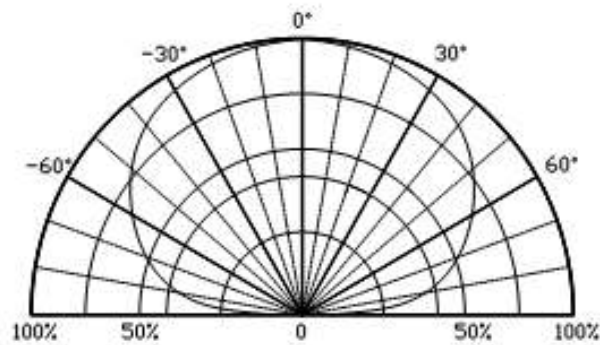


Yellow Green


Forward Current vs. Forward Voltage

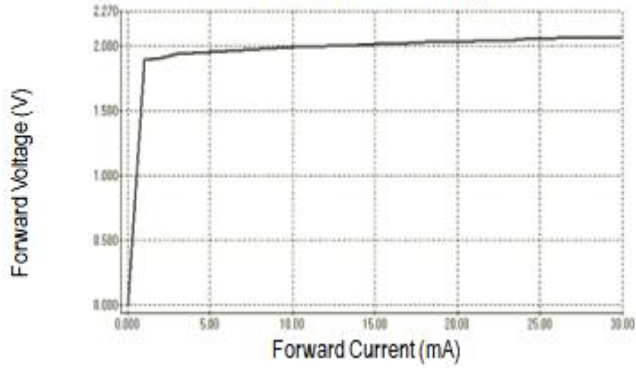

Relative Intensity vs. Wavelength

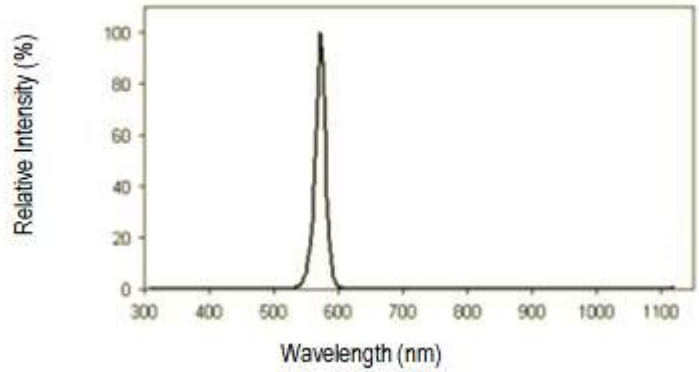


Directive Characteristics

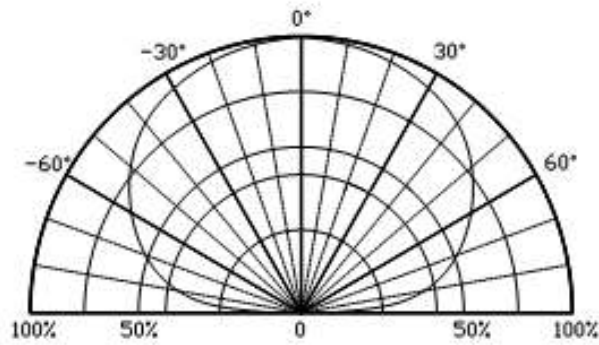


Solder Profile & Footprint

-The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

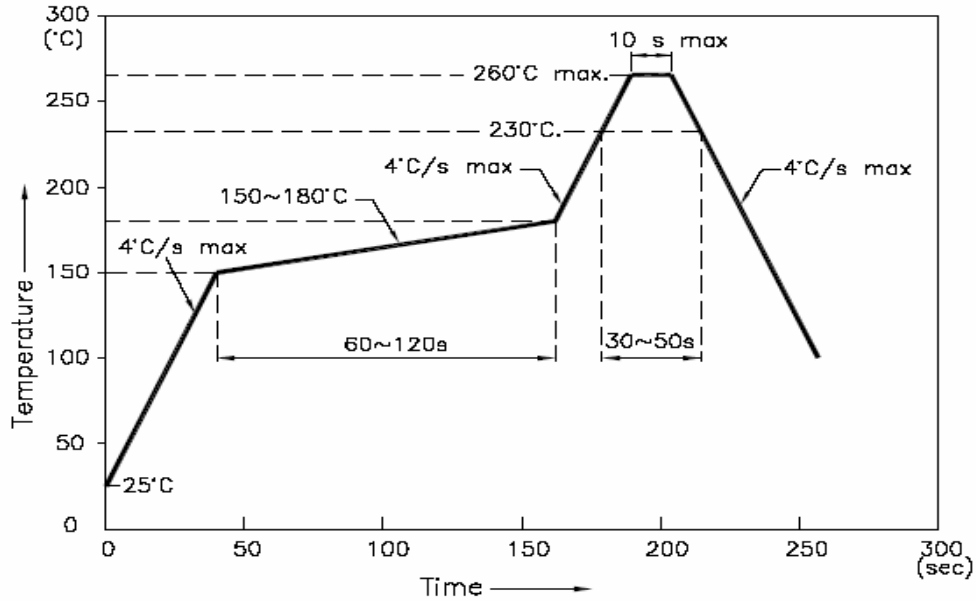

RECOMMEND PAD LAYOUT

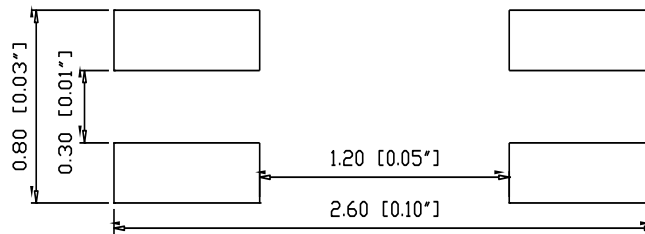


Units: mm

tolerance: +/- 0.1mm


Packing

Reel Dimension:

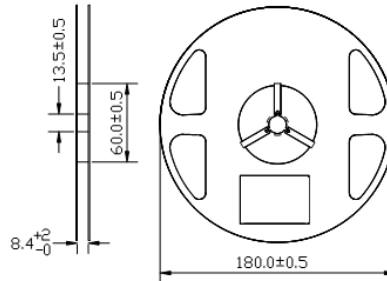


Unit: mm

Tape Dimension:

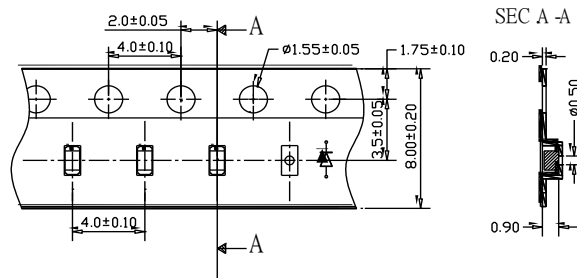


Unit: mm

Arrangement of Tape:

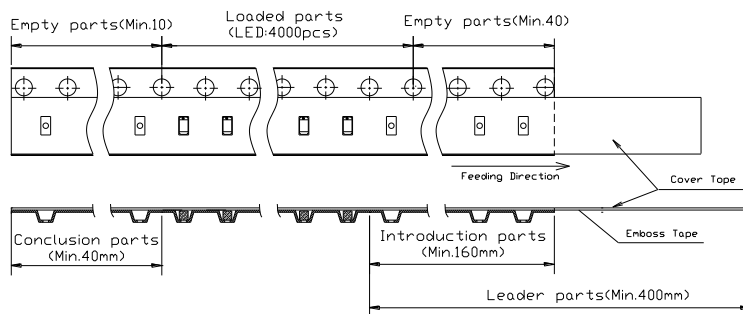

Packaging Specifications:

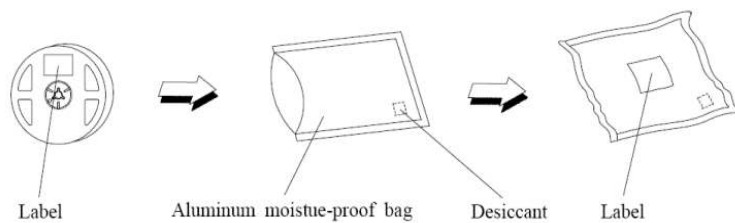

Product: QBLP601-YAG1	Date: May 03, 2019	Page 8 of 10
	Version# 1.0	



Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBLP601-YAG1	QBLP601-YAG1	Yellow (Y): $I_V=160\text{mcd typ. @ } 20\text{mA} / \lambda_D:$ 585nm to 595nm	4000pcs
		Yellow Green (AG): $I_V=63\text{mcd typ. @ } 20\text{mA} / \lambda_D:$ 565nm to 576nm	

Revision History

Description:	Revision #	Revision Date
New Release of QBLP601-YAG1	V1.0	05/03/2019

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.