

# ELECTRET CONDENSER MICROPHONE


## MEO-94P-01-Series

### Omnidirectional & RoHS Compliant


#### SPECIFICATIONS:

TYPE	MEO-94PD-01-Series MEO-94PN-01-Series
FREQUENCY RESPONSE (Hz)	20 ~ 16,000 Hz.
DIRECTIVITY	Omnidirectional
SENSITIVITY ( $OdB=1V/u\ bar$ )	- 64 (-643) - 62 (-623) - 60 (-603)
TOLERANCE	$\pm 3dB$
SENSITIVITY REDUCTION	Within -3.0dB@1.1V
S/N RATIO	More than 40 dB
OUTPUT IMPEDANCE	Low
MAX. OPER. VOLTAGE(VDC)	10 V
OPERATING VOLTAGE (VDC)	1.5 V
CURRENT CONSUMPTION (mA)	Max 0.3
DIMENSIONS (mm)	9.7 x 4.5
TERMINATION	PD = Pad    PN = Pin


Typical Frequency Response Curve:

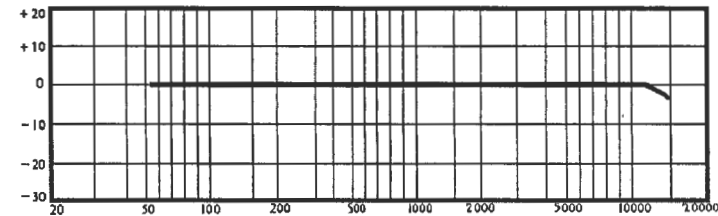

Dimensions:

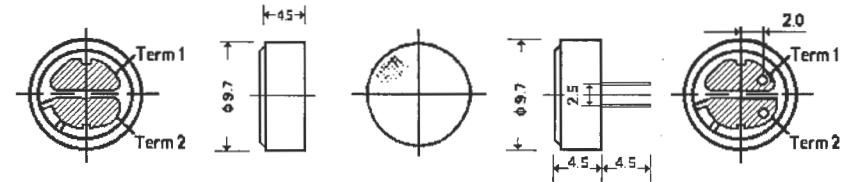

Schematic Diagram:

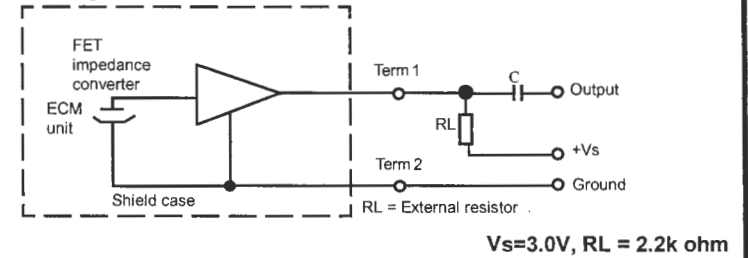

INTERVOX  
**International** ©  
 International Components Corporation  
 215 McCormick Dr., Bohemia, NY 11716 (631) 952-9595 (631) 952-9597

Title: <b>Electret Condenser Microphone</b>		
Code <b>G74</b>	Intervox Model # <b>MEO-94P-01-Series</b>	Rev.
Scale: mm	Date: 6/01/2007	Sheet 1 of 1