DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING .....

Dwg. No.
GC-539-0001

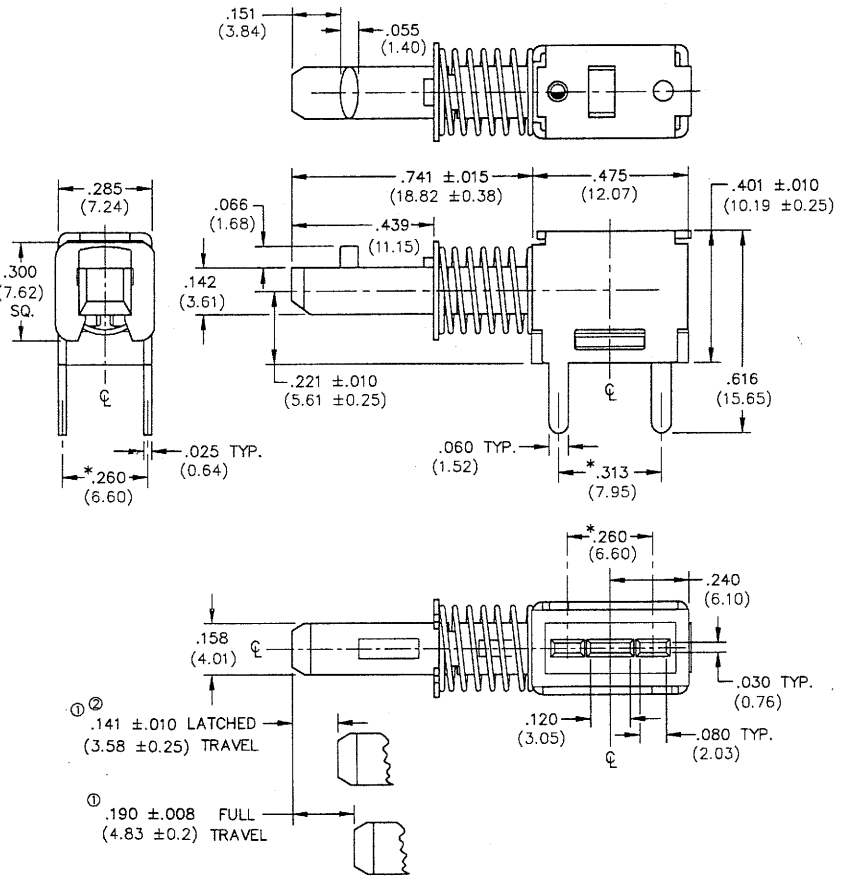

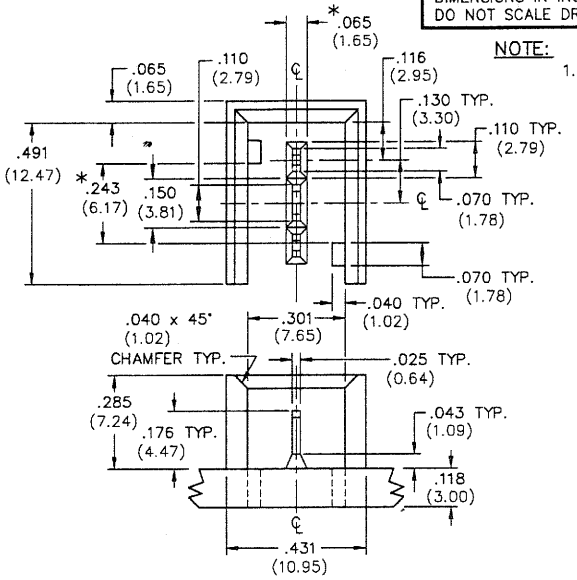

TERMINATION LAYOUT

NOTE:

1. Dimensions shown with an * are to be centered on either side of pertaining ℄ to within .003".

SPECIFICATIONS:

MATERIALS:

SWITCH HOUSING – Zinc plated cold rolled steel
SWITCH ACTUATOR – Polyester
SWITCH BASE – NYLON 6/6 – GLASS FILLED
SWITCH MOVING CONTACT – Copper Alloy/Phos. Bronze – Silver plated
INSERT MOLDED STATIONARY CONTACT – Copper Alloy (as supplied with gridplate assembly).
ELECTRICAL RATING – 1A. 125V.A.C.
3A. 14V.D.C.
MECHANICAL PERFORMANCE – 30,000 Cycles minimum at Rated Load

1	2	3	4	5	6	7	8	9	10

FORM-B3

REVISIONS

0 RELEASED. DGW 7-21-2000 AUG 02 2000

1 CHANGED TRAVEL TOL. ±.015 TO ±.008. (±0.38) (±0.2) 2 PLACES. DGW 9-07-2000 SEP 07 2000

2 CHANGED LATCHED TRAVEL TOL. ±.008 TO ±.010 (±0.2) (±0.25) DGW 9-18-2001 SEP 28 2001

PDF File Made

CW INDUSTRIES
Southampton, Pa. 18966

TOLERANCES UNLESS OTHERWISE SPECIFIED

	METRIC
2 Place Decimal ±.010	1 Place Dec. ±.25mm
3 Place Decimal ±.005	2 Place Dec. ±.13mm
Angles ..... ±1°	

Made for: CW IND.
Drawn by: DGW 7-21-2000
Checked by: G. Guld 7/31/00
Approval: H. Klemeyer 7/31/00

Title: LONG THROW PUSH – LATCH SWITCH ASSEMBLY

Division: SWITCH

Dwg. No. GC-539-0001

MASTER