

REVISED 8/8/91 Jmb

COIL: @ +25°C


RESISTANCE 870 ohms  $\pm$  10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 18.4 VDC

MUST RELEASE —

CUSTOMER DATA SHEET

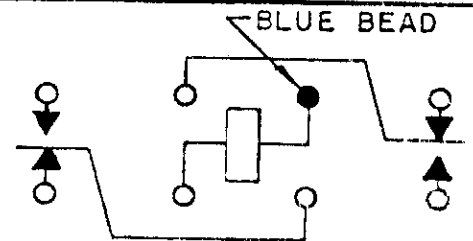

ENVIRONMENT:

VIBRATION — CPS TO — CPS AT — g's

SHOCK — g's — MS. DURATION

TEMPERATURE — °C TO — °C

NOTES: OPERATE 5MS MAX

RELEASE 3MS MAX

500VAC DIELECTRIC ALL POINTS

CONTACT RATING: 2 Amps @  
28 VDC resistive  
100,000 operations

DR. 8/9/83

CK. OSW



Communications  
Instruments, Inc.

CUST. Ref: P&B

CUST. NO. HP-11D-24

TYPE HFW RELAY

.HFW 1201 S100