


LOC	DATE	REVISIONS	DESCRIPTION	DATE	APP'D
G	14	A	REVISED PER 0720-0230-93		



AMP WIRE RANGE	UL E13288 Listed
12-10 AWG STRANDED	12-10 AWG STRANDED
NOT CERTIFIED	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 12-10* APPROX AS SHOWN

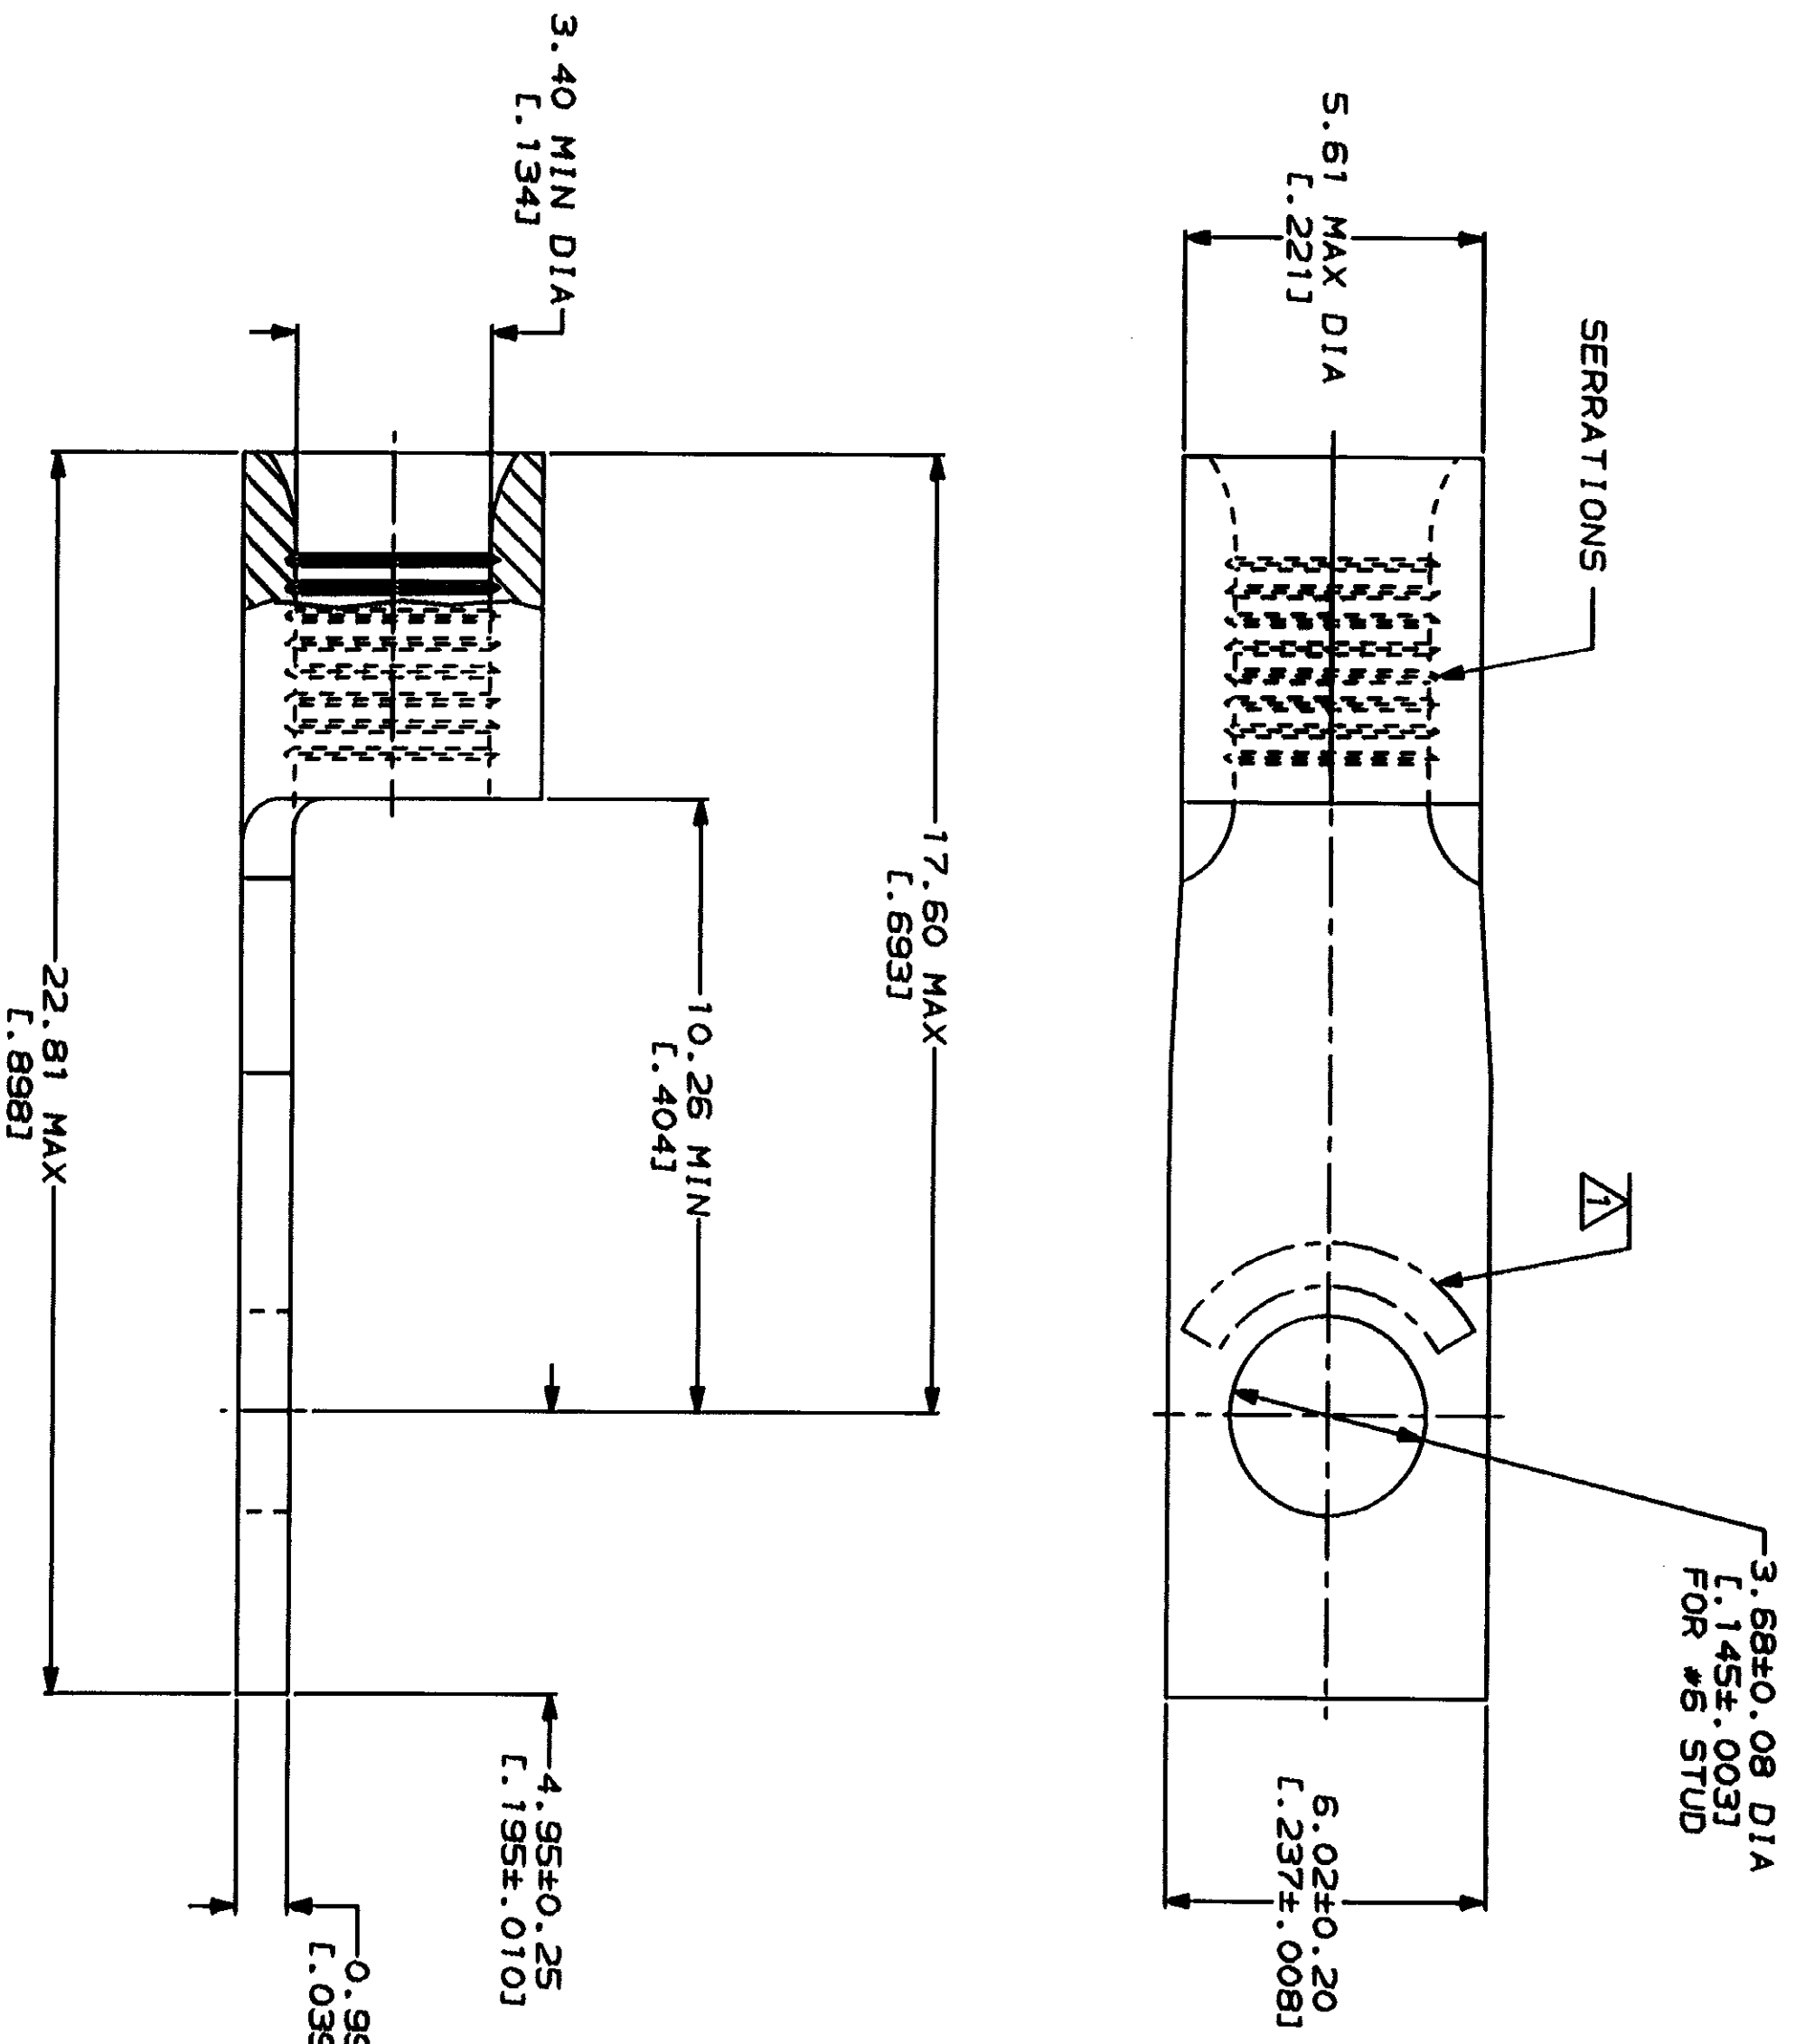

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

FOR APPLICATION
TOOLING INFORMATION
FOR ORDER ENTRY

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
2.62-6.64mm² [S.180-13,100] CIR MILS
STRANDED

DO NOT SCALE PRINT.
DIMENSIONS IN MILLIMETERS
TOLERANCES ON:
2 PLG DEC ± .
3 PLG DEC ± .
ANGLES

FINISH
TIN PLATE
0.00254[L.000100] MIN
THK PER MIL-T-10727

DR 1-28-93
TA BRIKMAN
CHK 1-28-93
DA PATTERSON
APPD 1-28-93
DE MILLER
APPD 1-28-93
JL HECKLEY
PRODUCT SPEC

AMP Incorporated
Harrisburg, PA 17105-3508

TERMINAL, RECTANGULAR
TONGUE, BUDGET

APPLICATION SPEC
SIZE
CAGE CODE
00779
DRAWING NO
327959
SCALE
8:1
SHEET
1 OF 1