

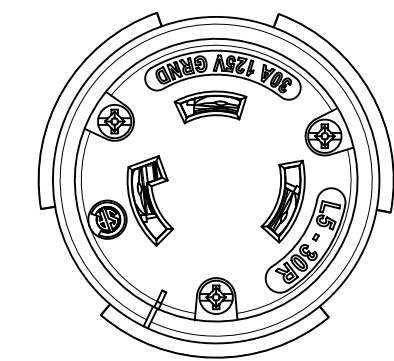
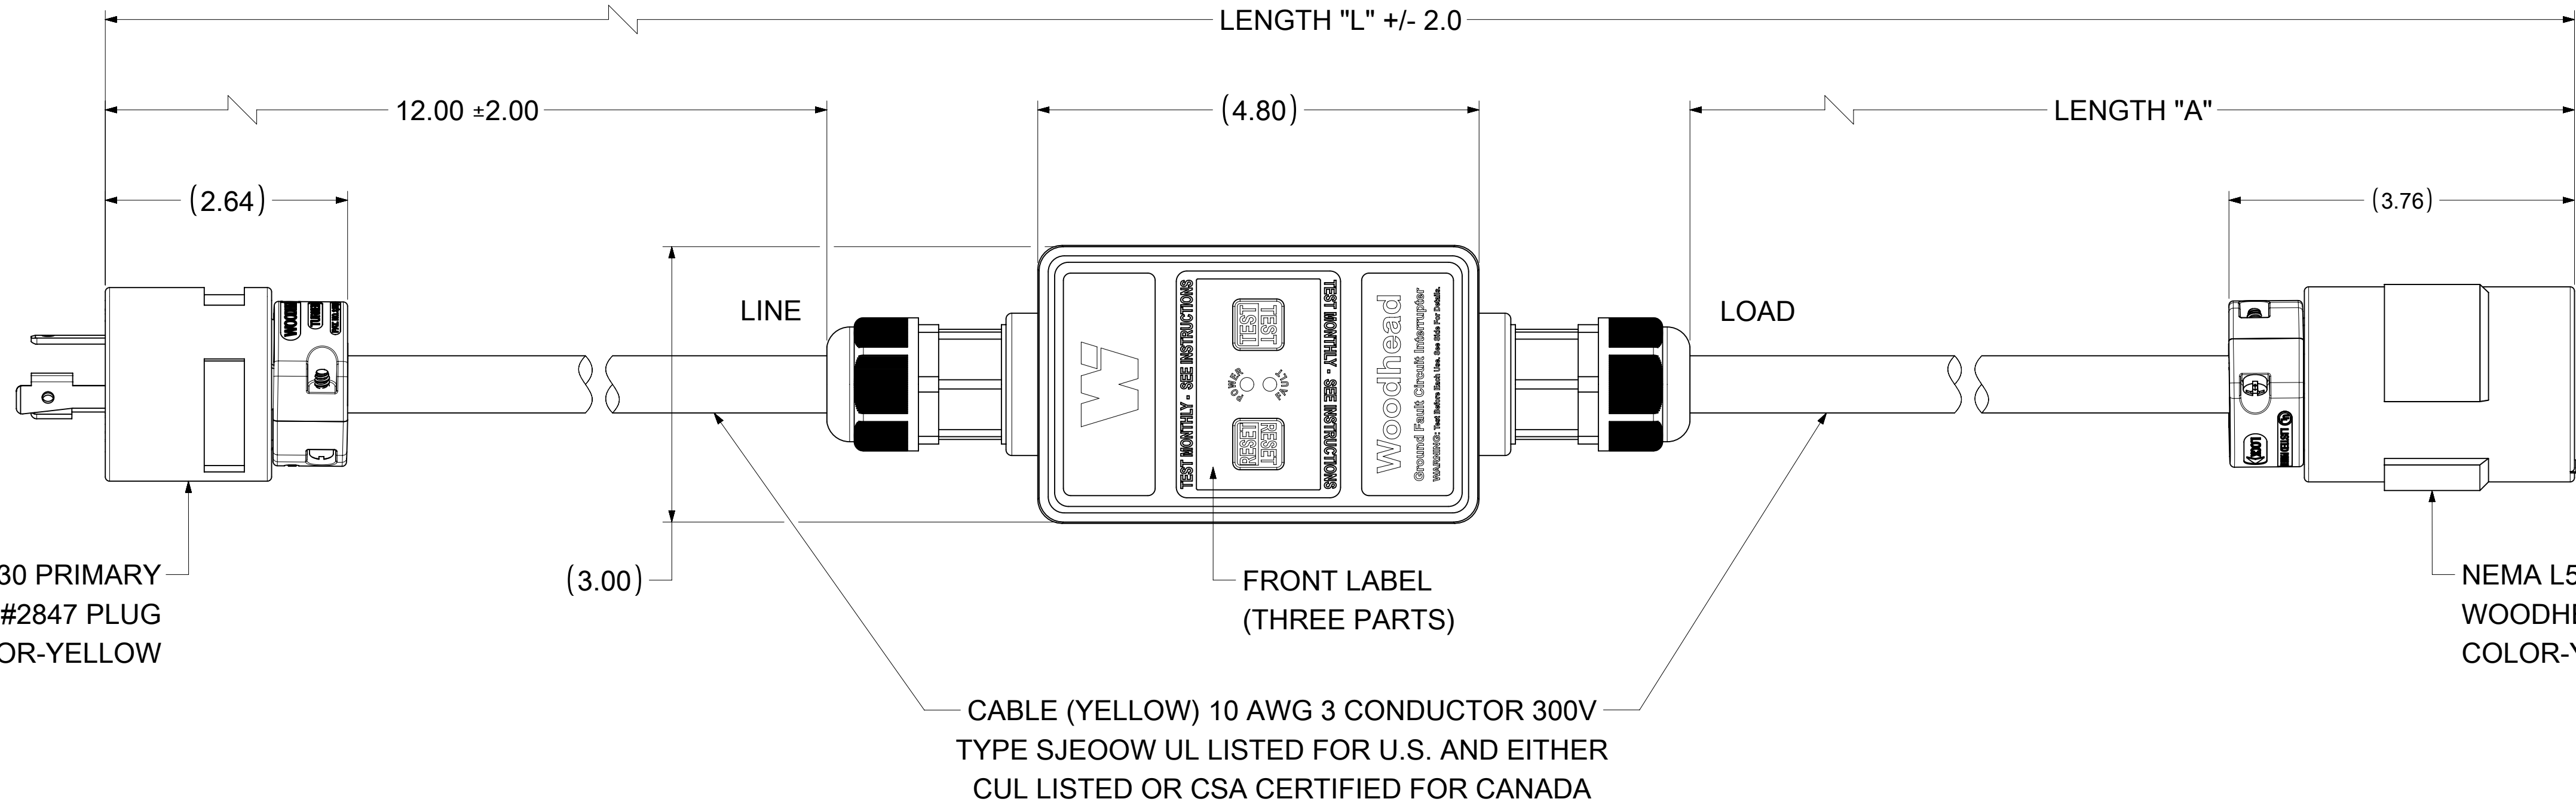



NEMA L5-30 PRIMARY  
WOODHEAD #2847 PLUG  
COLOR-YELLOW

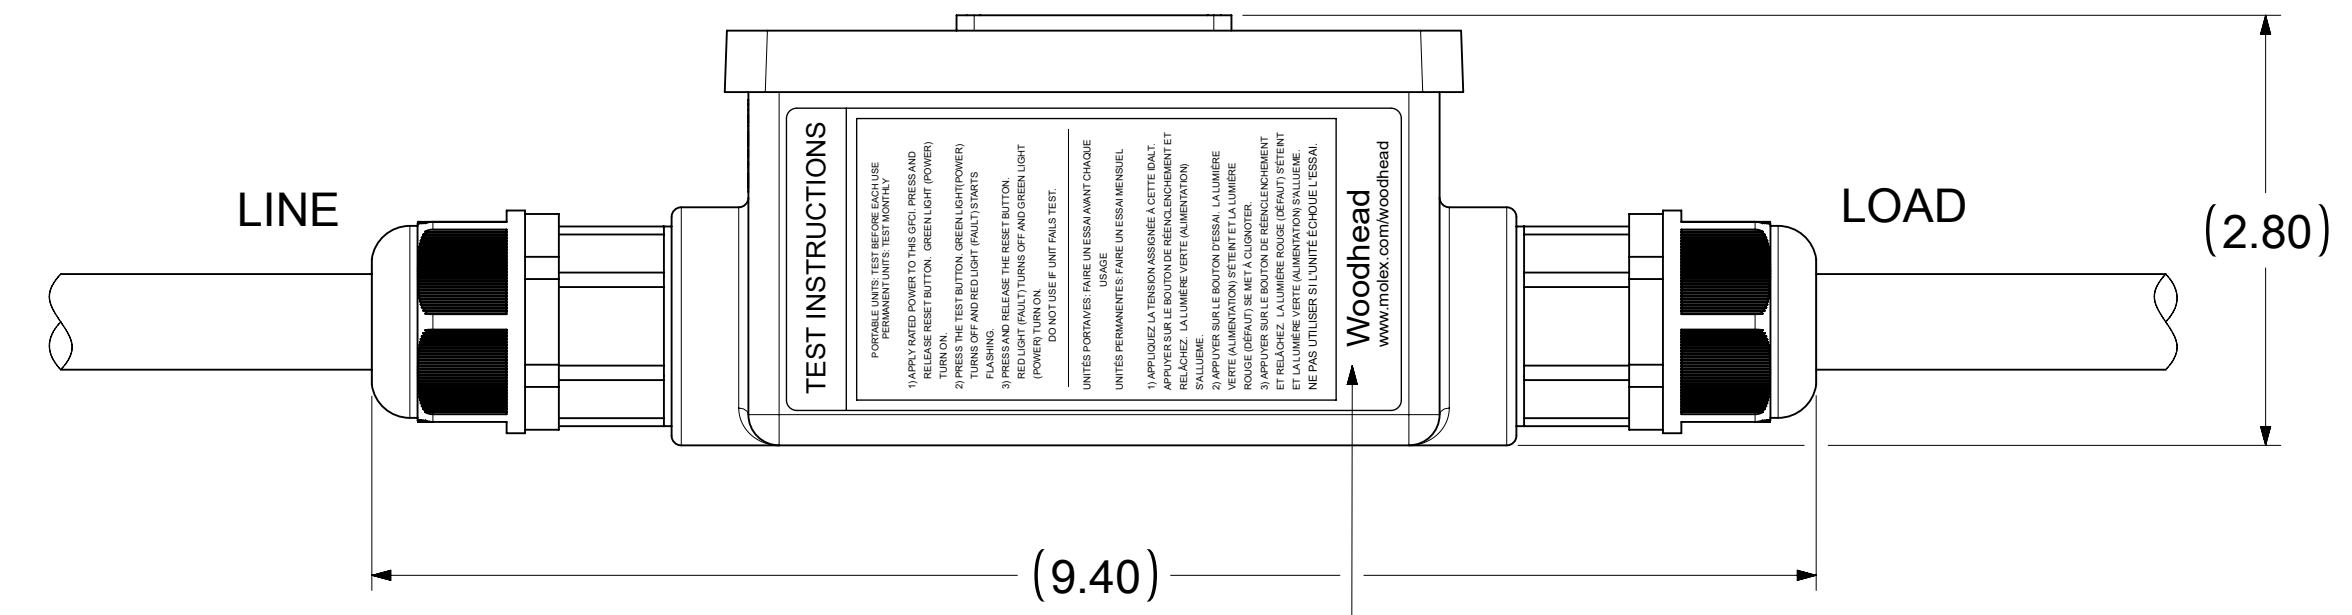

NEMA L5-30 SECONDARY  
WOODHEAD #2947 CONNECTOR  
COLOR-YELLOW

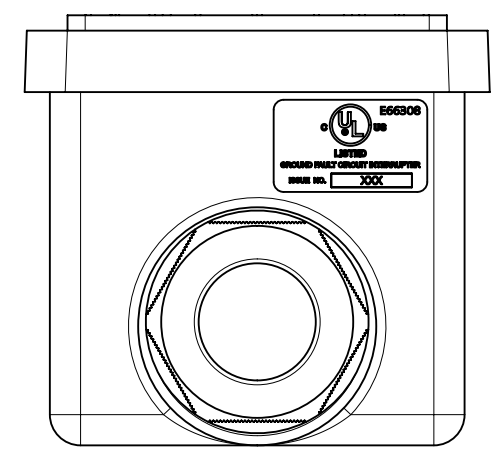

TEST INSTRUCTIONS LABEL

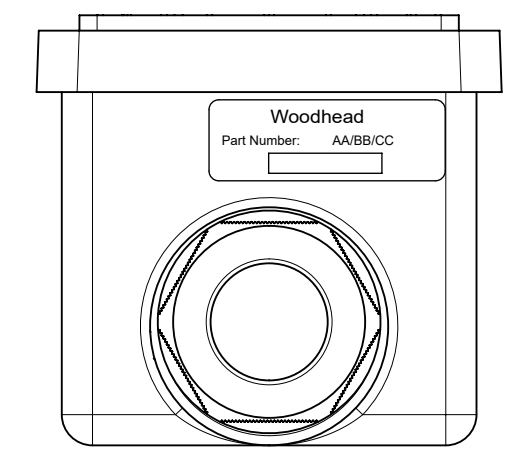

**TECHNICAL**

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530164	30051-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530171	30051-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530168	30051-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530165	30051-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530172	30051-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530169	30051-25M	26 FT 9.4 IN.	25 FT	MANUAL

<b>FUNCTIONAL SYMBOLS</b> FA = 0 FE = 0 FP = 0 <b>DIVISIONAL SYMBOLS</b>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: INCH SCALE: NTS CURRENT REV DESC: UPDATED LENGTH "L" IN THE TABLE.					
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±					EC NO: 672829 DRWN: PPURSUTANDEL 2021/08/06 CHK'D: DNGUYEN62 2021/08/18 APPR: HKNEELAND 2021/08/31
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: D-SIZE	SERIES: 130153	INITIAL REVISION: DRWN: PPURSUTANDEL 2021/07/01 APPR: HKNEELAND 2021/07/30
	DOCUMENT NUMBER: 1301530164		DOC TYPE: PSD	DOC PART: 000	REVISION: A1	PRODUCT CUSTOMER DRAWING 30A/120V GFCI AUTO 2 FT. SUPER-SAFEWAY NEMA L5