



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed HDMI/M Mold Design / Changed Cable Spec /	03-12-07	DP
B	Updated Specifications	09-08-11	LY
C	Updated Graphics, Notes, and Pin out	02-07-14	LY

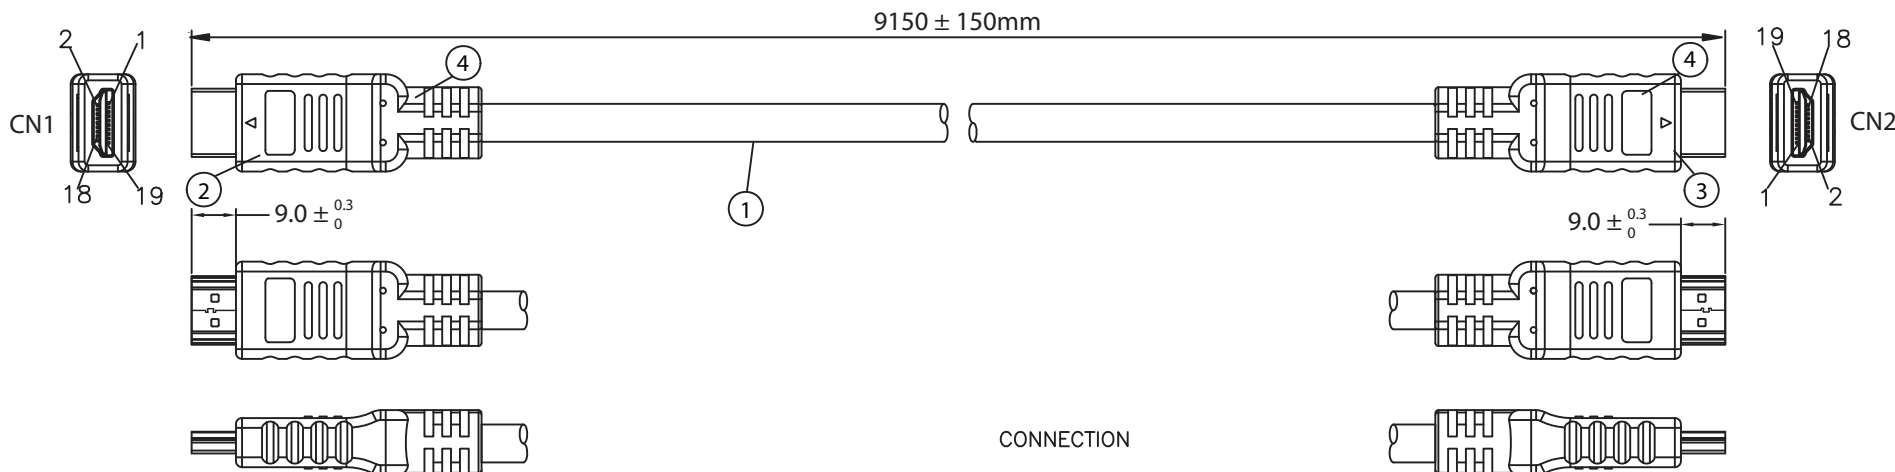

CONNECTION

CN1		CN2		CN1		CN2	
1	WHITE	1	VIOLET	13	VIOLET	13	
3	BROWN	3	WHITE	14	WHITE	14	
2	DRAIN	2	15	YELLOW	15	YELLOW	15
4	WHITE	4	16	ORANGE	16	ORANGE	16
6	RED	6	17	GRAY	17	GRAY	17
5	DRAIN	5	18	BLACK	18	BLACK	18
7	WHITE	7	19	RED	19	RED	19
9	GREEN	9	SHELL	DRAIN & BRAID	SHELL	SHELL	
8	DRAIN	8					
10	WHITE	10					
12	BLUE	12					
11	DRAIN	11					

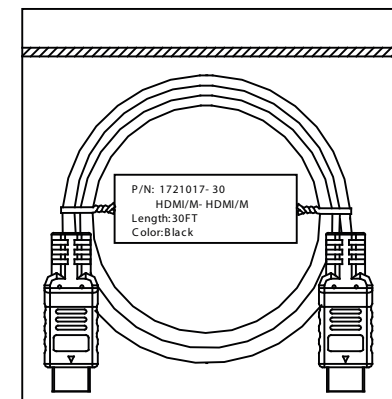

NOTES:

- CABLE: UL20276
(24AWG*1PR+EAM)*4+24AWG*1PR+24AWG*5C+AEB (AL) 65%
OUTER JACKET: BLACK, OD: 9.5 ± 0.2mm
- CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
- CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
- PVC MOLDED: 45P BLACK
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: AC 300V DC300V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 5 ohm MAX.
- 1PC/POLYBAG

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number:	1721017-30	
0-1	0.15	Description: HDMI/M - HDMI/M		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. C
18-50	0.50		Checked / Date	Approved / Date
50-120	0.70	Drawn / Date		
120-250	0.90	B.Grubb 01-25-07	01-25-07	JJH / 01-25-07
250-500	1.20			