

ELECTRICAL TEST:

- 1.100% OPEN SHORT & MIS WIRE TEST
 - 2.CONTACT RESISTANCE:2 OHM(MAX)
 - 3.INSULATION RESISTANCE:10M OHM(MIN)
 - 4.HI-POT TEST:DC 300V/10ms
- Support DisplayPort 1.2 input and VGA output.
 - Support VGA highest video resolution 1920*1200@60Hz.


MARKING CABLE :

Displayport Cable E***** AWM STYLE 20276 80°C 30V VW-1 *****

Table:

Length	Part Number
915±20mm	DPSVGA-03F-MM
1830±30mm	DPSVGA-06F-MM
3050±40mm	DPSVGA-10F-MM
4575±50mm	DPSVGA-15F-MM

PIN Assignment

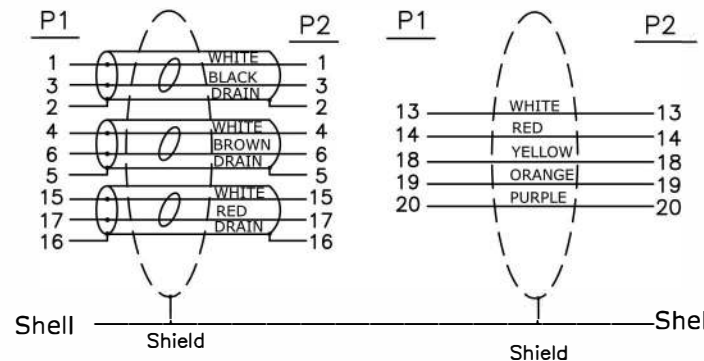

10	HDB M Transparent Dust Cover	1	pcs
9	DP M Transparent Dust Cover	1	pcs
8	SCREW:#4-40UNC(2.8*58.25MM) NICKEL PLATED	2	pcs
7	Display Port Male ABS Shell, Material: ABS, Colocr: Black	1	set
6	Copper Foil:50*20	2	pcs
5	Inside Molding:PE	5	g
4	45P PVC, Colocr: Black	18	g
3	DP to VGA Converter With VGA Male, PCB+SMT,VGA Pin Gold Flash, Shell Gold Flash(IC ANX9833)	1	set
2	Display Port Male, Insulation: Black, Material: LCP, Pin Gold Plated, Shell Gold Flash	1	pcs
1	Display Port Cable UL20276 [28AWG(7/0.127TC)*1P+D.W+AL+Mylar)*3+28AWG(7/0.127TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: Black OD:6.0±0.2mm	L	M
NO	DESCRIPTION	Q'TY	UNIT

TOLERANCE	INCHES		M/M	
	.X	.015	.30	
	.XX	.010	.10	
	.XXX	.005	.05	
DRAWN BY	Hong			
CHECK BY				
APPD BY				

TITLE: DP M TO VGA M 28AWG GOLD PLATED			
CUSTOMER :			
CUSTOMER P/N :		DPSVGA-XXF-MM	
SCALE	NONE	DRAWING NO.:	REV. A01
UNIT	MM		
DATE	2015.12.09		1/1