


VIEW ON MATING SIDE

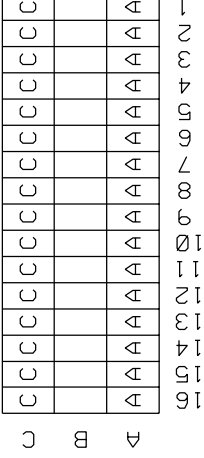

A = 16 CONTACTS L=2,8
 C = 16 CONTACTS L=2,8

S = 32 TOTAL NUMBER OF CONTACTS

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	yes
Dimensions	SDA-85052-0002 sht.1
Technical Data	PS-85052-0001

C	G2/0	c1-16			
A	G2/0	a1-16			
Contact symbol	Perform. level		Contact position number		

ECN 2348 first release	REVISIONS	FOR PREVIOUS REVISIONS SEE MRI LIST
	LTR	

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 2°	DRWG BY	KN	SIGN
INCH	CHK'D BY	Ca	SIGN
METRIC	APP'D BY	JB	SIGN
3 PLACE ± .			
2 PLACE ± .			
1 PLACE ± .			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DESIGN DIMENSION	<input type="checkbox"/> MM <input type="checkbox"/> IN.	
	EQUIVALENT DIMENSION	<input type="checkbox"/> MM <input type="checkbox"/> IN.	
	IF TWO DIMENSIONS ARE SHOWN, THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY		

REVISE ONLY ON CAD SYSTEM	SH. REV.
CAD/CAM PROJECT NAME S8505208 S41	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
TITLE 48 pos. female connector acc. DIN 41612 style R/2 contacts arrangement	
SHEET NO. DATE 1 OF 1 96/12/06	
PART NO. DWG NO. SIZE 85052-0842 SDA-85052-0842 A	