


T491A225K025ZT7280

Obsolete

B45196H, Tantalum, MnO₂ Tantalum, 2.2 uF, 10%, 25 VDC, SMD, Molded, 3216, Height Max = 1.8mm

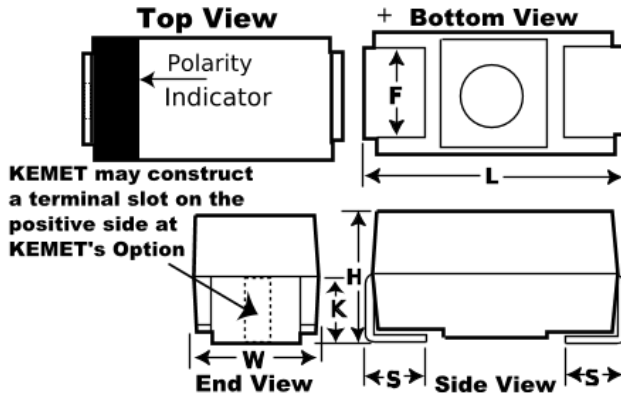

General Information

Series	B45196H
Dielectric	MnO ₂ Tantalum
Style	SMD Chip
Description	SMD, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Obsolete. Old Part Number [Obsolete] Was B45196H5225K106.

Specifications

Capacitance	2.2 uF
Capacitance Tolerance	10%
Voltage DC	25 VDC (85C), 16.75 VDC (125C)
Temperature Range	-55/+125°C
Rated Temperature	85°C
Dissipation Factor	6%
Failure Rate	N/A
Leakage Current	0.6 uA

Dimensions

Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
K	1.3mm TYP

Packaging Specifications

Packaging	T&R, 330mm
Packaging Quantity	9000