


COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX  
CONTACT BOUNCE 2 MS MAX

### CUSTOMER DATA SHEET

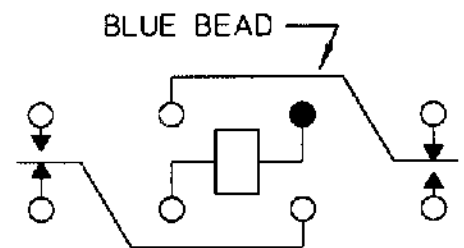

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE 100,000  
OPERATIONS

DR. R.B. 9/13/96 CK. *[Signature]*

COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE "HFW" RELAY

HFW1201K00