



Versatile, Reliable high speed serial connectivity

Features and Benefits

- Software Selectable EIA-232/422/485 interfaces
- Low Profile options
- Speeds up to 3.6Mbps
- Universal 3.3/5v PCI bus slot support
- PCI-X compatible
- Flexible solutions with 1, 2, 4, 8 or 16 ports
- 25KV ESD surge protection for peace of mind
- Full modem control and hardware/software flow control
- Wide range of Specialix, Chase and Digi cabling and connection options
- 64 bit support on most OS
- RoHS & WEEE compliant
- Lifetime warranty for security and peace of mind


Applications:

- Connecting EPOS devices for Retail Point of Sale
- Access serial devices for factory, industrial and warehouse automation
- Connectivity for Data Acquisition in Kiosk's and multi-user work groups
- Connect modem pools for remote access dial-in/dial-out

Perle UltraPort SI is the ideal solution for applications where multiple serial interface types and a fixed number of local ports is required. With 1 to 16 software selectable serial ports, the Perle UltraPort SI range offers flexibility, high performance, excellent throughput and reliable solutions that completely outperforms the competition.

Overview

The Perle UltraPort SI PCI cards are the most advanced serial card solutions on the market today providing a complete range of solutions for retail point of sale, data acquisition, industrial automation, advanced kiosk design and much more. Perle UltraPort SI with software selectable interfaces, provides the ability to make dynamic configuration changes between EIA-232, EIA-422 and EIA-485 without having to take down the server. This ensures maximum availability for mission critical operations.

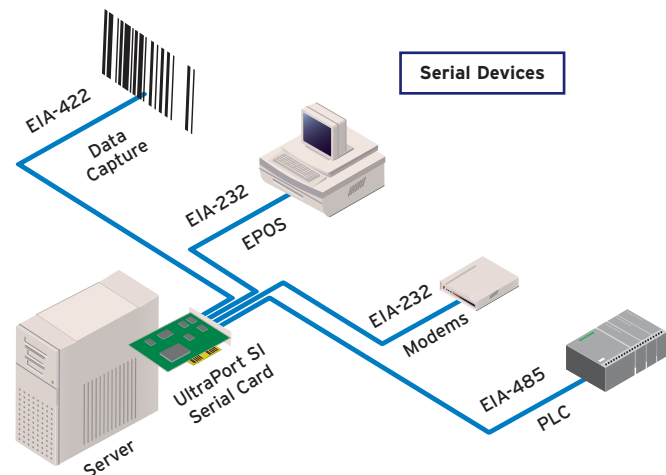

A wide variety of DB9, DB25, and RJ45 cables and connector boxes support the most popular pin-outs from Specialix International, Chase Research and Digi International. As you upgrade servers and cards to the latest PCI standard, only Perle can ensure you don't spend valuable budget allocations on re-cabling costs.

Class Leading Support and Warranty

The Perle UltraPort Multi-port Cards are backed by the best service and support in the industry, including Perle's unique lifetime warranty. Choose Perle for the highest levels of performance, flexibility and quality since 1976.

Technical Specifications

Features

- Software Selectable EIA-232/422/485 interfaces
- Low Profile form on 1,4 and 8 port models
- Speeds up to 3.6Mbps on EIA-422/485 and up to 921.6 Kbps on EIA-232
- Universal 3.3/5v PCI Bus slot support
- PCI 3.0 and backward compliant
- PCI-X compatible
- Compatible with 32 and 64 bit PCI slots
- Full modem control
- Hardware and software flow control
- 25KV ESD surge protection across all ports
- 64 byte write and 64 byte read FIFOs

Connectors

- UltraPort1 SI-LP: 1 on-board DB9M on low profile card
- UltraPort2 SI: 2 on-board DB9M
- UltraPort4 SI-RJ45: 4 on-board RJ45
- UltraPort4 SI-LP: Single VHDCI-68 connector on low profile card
- UltraPort8 SI-LP: Single VHDCI-68 connector on low profile card
- UltraPort16 SI: Dual VHDCI-68 connectors
- VHDCI-68 - Connector Options include DB9, DB25 and RJ45 connector boxes and fan-out cables with Specialix International, Chase Research and Digi International standard pin-outs

Signal support

TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI

Approvals

- IEC 60950
- EN 60950
- ANSI/UL 60950
- EN 55024
- FCC Part15 ,Class B
- EN55022 Class B
- CAN/CSA 22.2, No.60950
- ICES-003, Class B

Supported Operating System Drivers

- Linux 32/64 bit
- Sun Solaris 32/64 bit Intel and SPARC
- SCO OpenServer 5 & 6
- SCO UnixWare
- Windows*2000
- Windows*NT
- Windows*XP 32/64 bit
- Windows*95/98
- Windows*Server 2003 32/64 bit
- Windows*Vista 32/64 bit

Power/Requirements

- UltraPort1 SI-LP:
 - +5V +/-5% 300mA
 - /+12V +/-5% 5mA
- UltraPort2 SI:
 - +5V +/-5% 410mA
 - /+12V +/-5% 10mA
- UltraPort4 SI:
 - +5V +/-5% 800mA
 - /+12V +/-5% 20mA
- UltraPort8 SI:
 - +5V +/-5% 1500mA
 - /+12V +/-5% 30mA
- UltraPort16 SI:
 - +5V +/-5% 3000mA
 - +12V +/-5% 65mA

Environmental

- Operating temperature: 0°C to 55°C, 32°F to 131°F
- Storage temperature: -40°C to 66°C, -40°F to 150°F
- Relative Humidity: 10 to 90%, non condensing

Dimensions:

- UltraPort1 SI-LP: 56mm (H) x 120mm (L)
- UltraPort2 SI: 88mm (H) x 132mm (L)
- UltraPort4 SI-RJ45: 88mm (H) x 132mm (L)
- UltraPort4 SI-LP: 56mm (H) x 168mm (L)
- UltraPort8 SI-LP: 56mm (H) x 168mm (L)
- UltraPort16 SI: 98.5mm (H) x 188mm (L)

Warranty:

- Limited lifetime warranty



www.perle.com

Perle products are constantly reviewed and updated to meet customers' needs, as such specifications and capabilities are subject to change without notice. We endeavor to keep product descriptions as current as possible; for the latest up-to-date information, please visit our web site at www.perle.com. Perle is a registered trademark of Perle Systems. All other product names are trademarks of their respective holders. Copyright©Perle.