



Series 516 Zero-Insertion-Force Socket

FEATURES


- A choice of 24-, 28-, or 40-pin count devices can be inserted without bending or otherwise damaging the legs, since no force is required to either insert or remove the component from the socket.
- Contacts are normally open and are closed by a unique cam action controlled by dual lever arms.
- The last 15° of movement of the cam provides a wiping action to the contacts on the legs of the device to remove any residue, ensuring a gas-tight seal.
- Tapered entry helps guide the device legs into the mating position with the contacts.

SPECIFICATIONS

- Body, Handle, and Cam: Black UL 94V-0 Glass-filled 4/6 Nylon
- Pins are Be-Cu 170 or 172, 1/2-hard
- Pin Plating: -11 = 10µ" [0.25µm] min. Gold per MIL-G-45204 over 50µ" [1.27µm] min. Nickel per SAE-AMS-QQ-N-290
- Contact Current Rating = 1 Amp
- Operating Temperature: 257°F [125°C]
- Minimum Retention Force (when closed) = 15 grams/lead, based on a 0.008 [0.20] thick test lead
- Accepts most lead widths with lengths from 0.075 to 0.250 [1.91 to 6.35]


MOUNTING CONSIDERATIONS

- Suggested PCB Hole Size = 0.035 ±0.002 [0.89 ±0.05] diameter

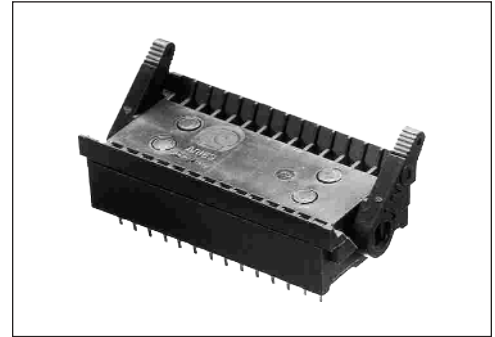

NOTE: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

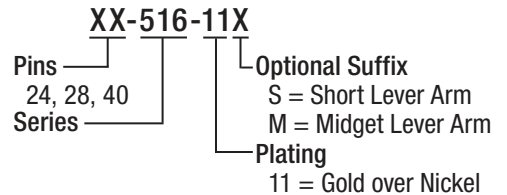


ALL DIMENSIONS: INCHES [MILLIMETERS]

Series 526 Lo-PRO®file ZIF Socket
also available Consult Data Sheet 10018

$$"A" = (\text{NO. OF PINS PER ROW} \times .100 [2.54]) + .220 [5.59]$$

$$"B" = (\text{NO. OF PINS PER ROW} - 1) \times .100 [2.54]$$

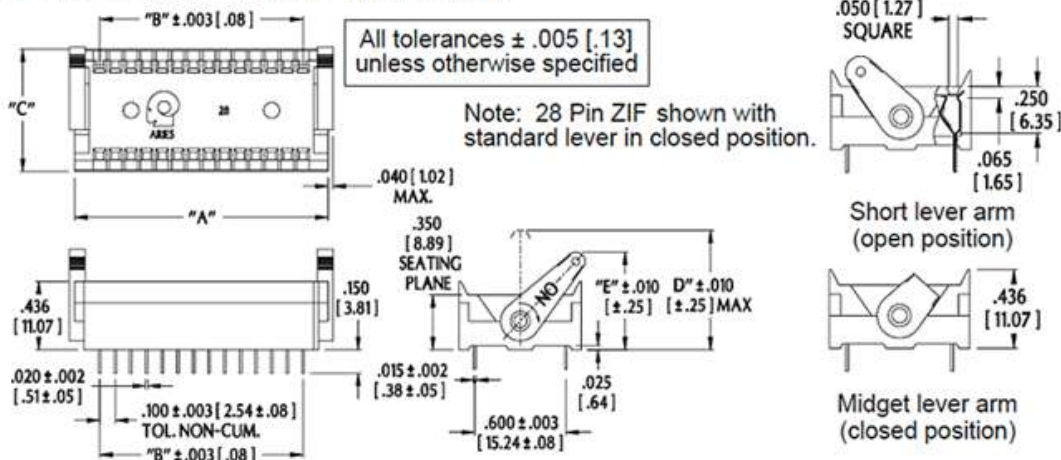

No. of Pins	Dim. "C"	Standard Lever Arm		Short Lever Arm		Midget Lever Arm	
		Dim. "D"	Dim. "E"	Dim. "D"	Dim. "E"	Dim. "D"	Dim. "E"
24	0.785 [19.94]	0.76 [19.30]	0.630 [16.00]	0.60 [15.24]	0.520 [13.21]	0.41 [10.41]	0.42 [10.67]
28	0.785 [19.94]	0.76 [19.30]	0.630 [16.00]	0.60 [15.24]	0.520 [13.21]	0.41 [10.41]	0.42 [10.67]
40	0.780 [19.81]	0.76 [19.30]	0.630 [16.00]	0.60 [15.24]	0.520 [13.21]	0.41 [10.41]	0.42 [10.67]



Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

