


product type designation

product description

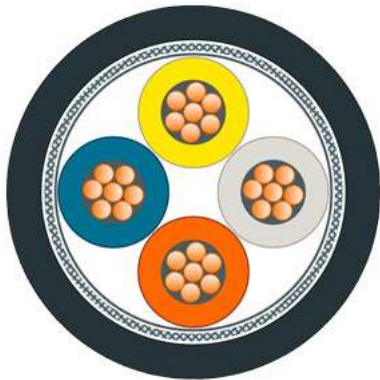

IE TP Train Cable 2x2 (Type C, AWG22/7)

Flexible bus cable with tinned copper leads (4-core) for rail applications, sold by the meter, unassembled

IE TP TRAIN Cable 2x2; CAT5 TP installation cable for Rail applications for connection to FC RJ45 plug 2x2, FC M12 plug pro 2x2; railway-certified, 4-core, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

suitability for use	For laying in rail vehicles and buses
cable designation	SF/UTP
electrical data	
attenuation factor per length	
• at 10 MHz / maximum	0.053 dB/m
• at 100 MHz / maximum	0.188 dB/m
impedance	
• at 1 MHz ... 100 MHz	100 Ω
relative symmetrical tolerance	
• of the characteristic impedance at 1 MHz ... 100 MHz	5 %
near-end crosstalk per length	
• at 1 MHz ... 100 MHz	0.5 dB/m
transfer impedance per length / at 10 MHz	8 mΩ/m
loop resistance per length / maximum	124 mΩ/m
operating voltage	
• RMS value	125 V
mechanical data	
number of electrical cores	4
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tinned copper wires
type of electrical connection / FastConnect	No
core diameter	
• of AWG22 insulated conductor	0.75 mm
outer diameter	
• of inner conductor	0.75 mm
• of the wire insulation	1.5 mm
• of cable sheath	6.6 mm
symmetrical tolerance of the outer diameter / of cable sheath	0.2 mm
material	
• of the wire insulation	polyethylene (PE)
• of cable sheath	Elastomer meshed electron beam
color	
• of the insulation of data wires	white/yellow/blue/orange
• of cable sheath	Black
bending radius	

<ul style="list-style-type: none"> • with single bend / minimum permissible 	40 mm
<ul style="list-style-type: none"> • with multiple bends / minimum permissible 	40 mm
tensile load / maximum	150 N
weight per length	71 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> • during operation 	-40 ... +80 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +80 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +80 °C
<ul style="list-style-type: none"> • during installation 	-20 ... +60 °C
<ul style="list-style-type: none"> • note 	160 °C temporarily under short-circuit conditions
ambient condition / for operation	Electrical characteristics measured at 20 °C, tests according to EN 50288-2-1
fire behavior	BS6853, DIN5510-2 Brandschutzstufe 1-4, prEN45545-2 Hazard Level HL1-HL3, EN50306-4, NF F 16-101, NFPA130
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil 	EN 50306-4 (72h/100 °C, IRM 902, 168h/70 °C, IRM 903)
<ul style="list-style-type: none"> • to grease 	Conditional resistance
<ul style="list-style-type: none"> • to water 	conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> • halogen-free 	Yes
<ul style="list-style-type: none"> • silicon-free 	Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> • with 100BaseTX 	100 m
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval 	Yes
<ul style="list-style-type: none"> • CE marking 	Yes
<ul style="list-style-type: none"> • RoHS conformity 	Yes
standard for structured cabling	Cat5
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) 	No
<ul style="list-style-type: none"> • French marine classification society (BV) 	No
<ul style="list-style-type: none"> • Det Norske Veritas (DNV) 	No
<ul style="list-style-type: none"> • Germanische Lloyd (GL) 	No
<ul style="list-style-type: none"> • Lloyds Register of Shipping (LRS) 	No
<ul style="list-style-type: none"> • Nippon Kaiji Kyokai (NK) 	No
<ul style="list-style-type: none"> • Polski Rejestr Statkow (PRS) 	No
reference code	
<ul style="list-style-type: none"> • according to IEC 81346-2 	WG
<ul style="list-style-type: none"> • according to IEC 81346-2:2019 	WGB
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool 	http://www.siemens.com/tia-selection-tool
<ul style="list-style-type: none"> • to website: Industrial communication 	http://www.siemens.com/simatic-net
<ul style="list-style-type: none"> • to website: Industry Mall 	https://mall.industry.siemens.com
<ul style="list-style-type: none"> • to website: Information and Download Center 	http://www.siemens.com/industry/infocenter
<ul style="list-style-type: none"> • to website: Selection guide for cables and connectors 	https://sie.ag/2QdIxcP
<ul style="list-style-type: none"> • to website: Image database 	http://automation.siemens.com/bilddb
<ul style="list-style-type: none"> • to website: CAx-Download-Manager 	http://www.siemens.com/cax
<ul style="list-style-type: none"> • to website: Industry Online Support 	https://support.industry.siemens.com
last modified:	10/30/2021 