

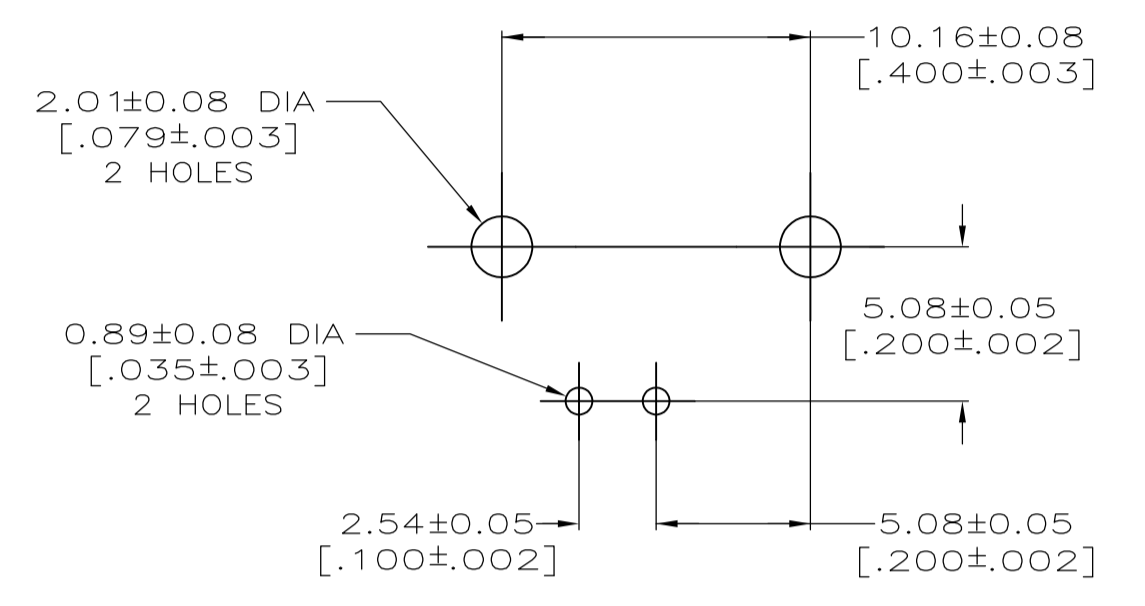





REVISONS		DATE	BY	APPV
REV	PER ECO 08-009474	7/22/2008	DW	JL
C1	REVISED PER ECO-10-000444	19JAN10	KK	HMR

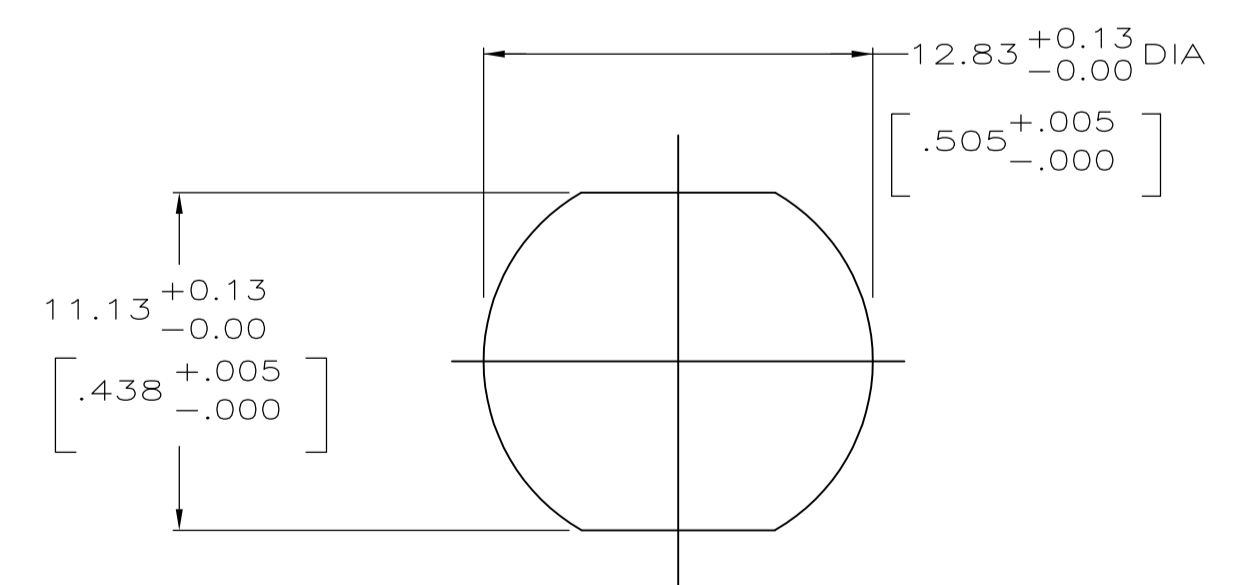


PCB CONFIGURATION

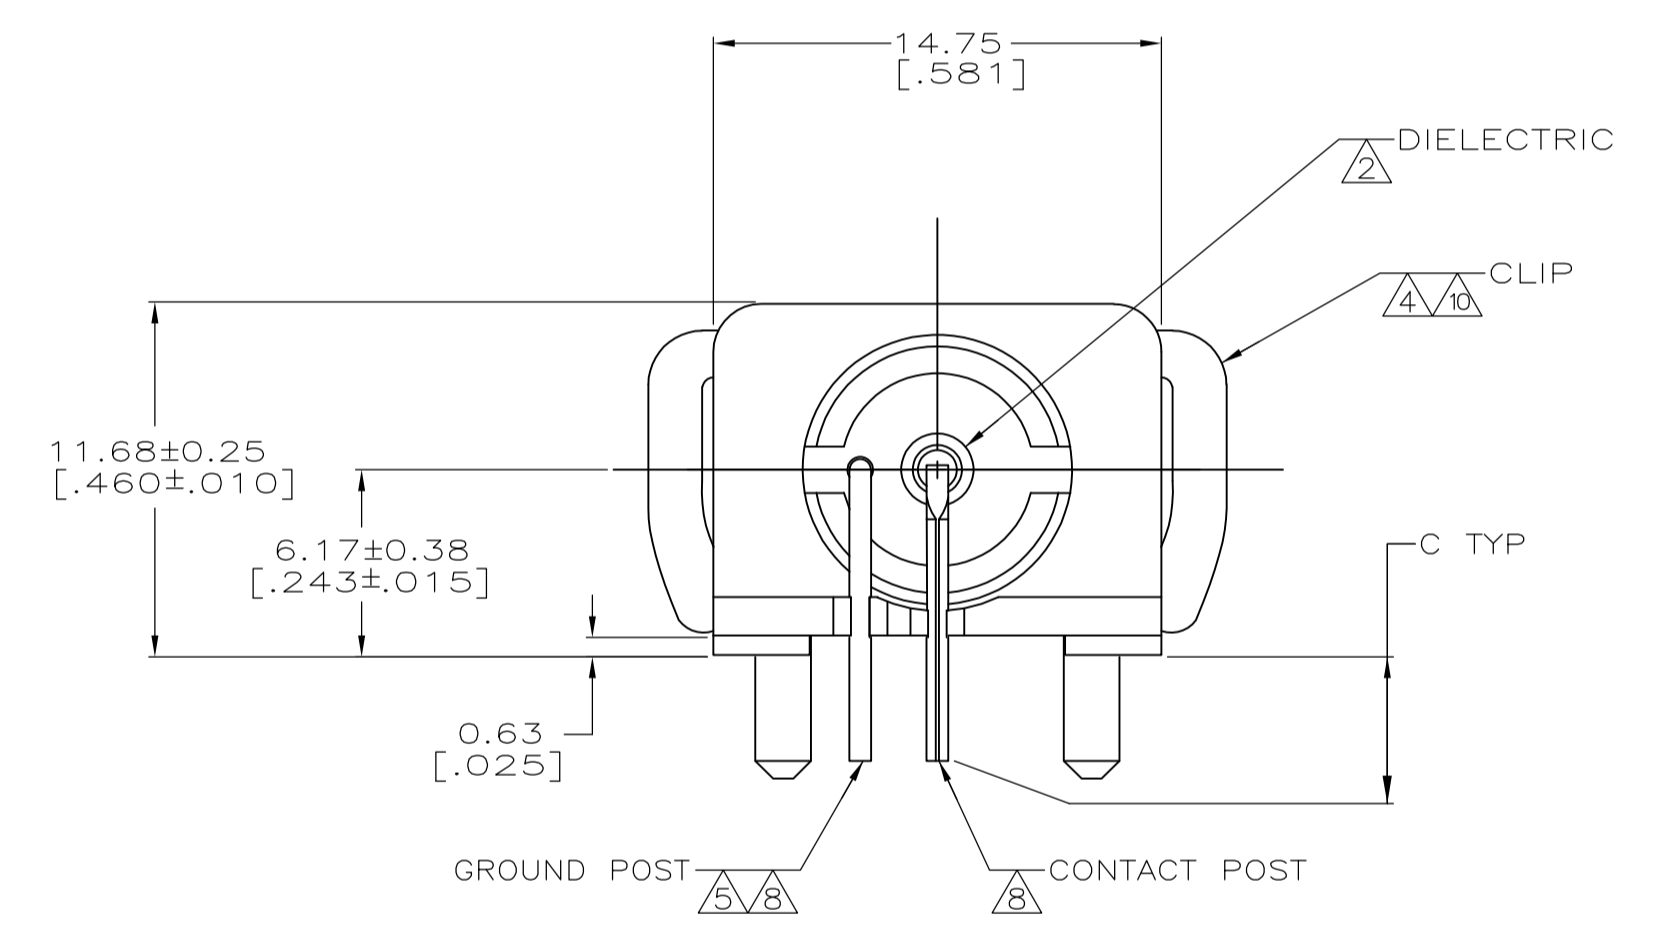

RECOMMENDED PANEL CUTOUT

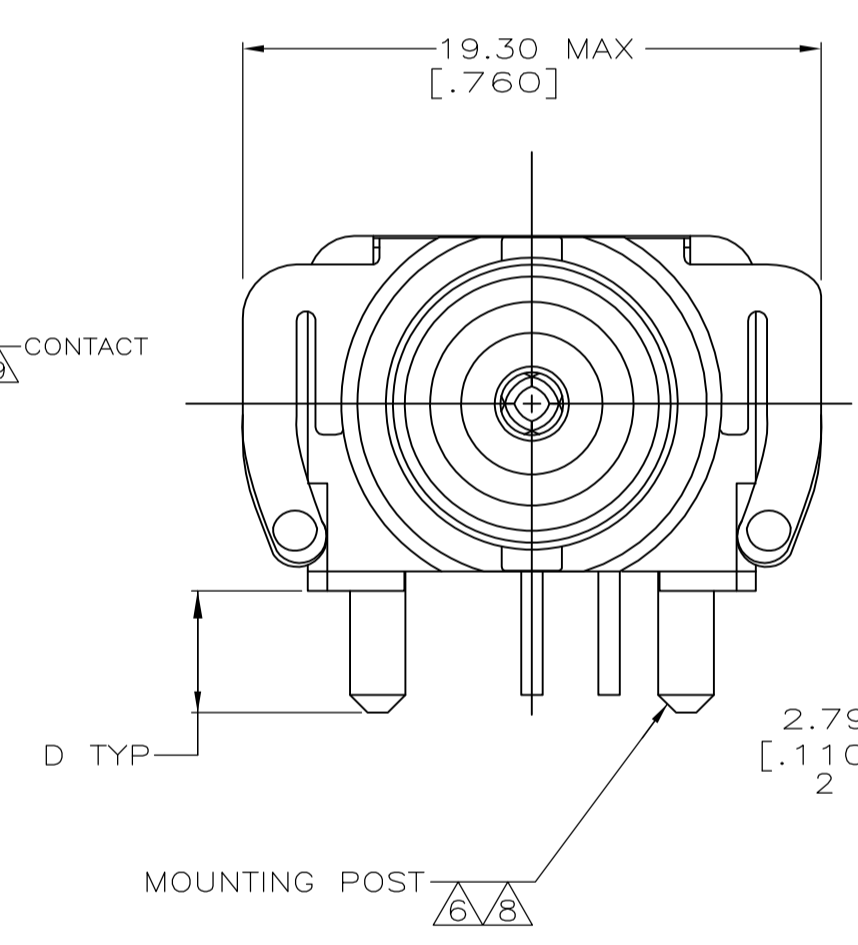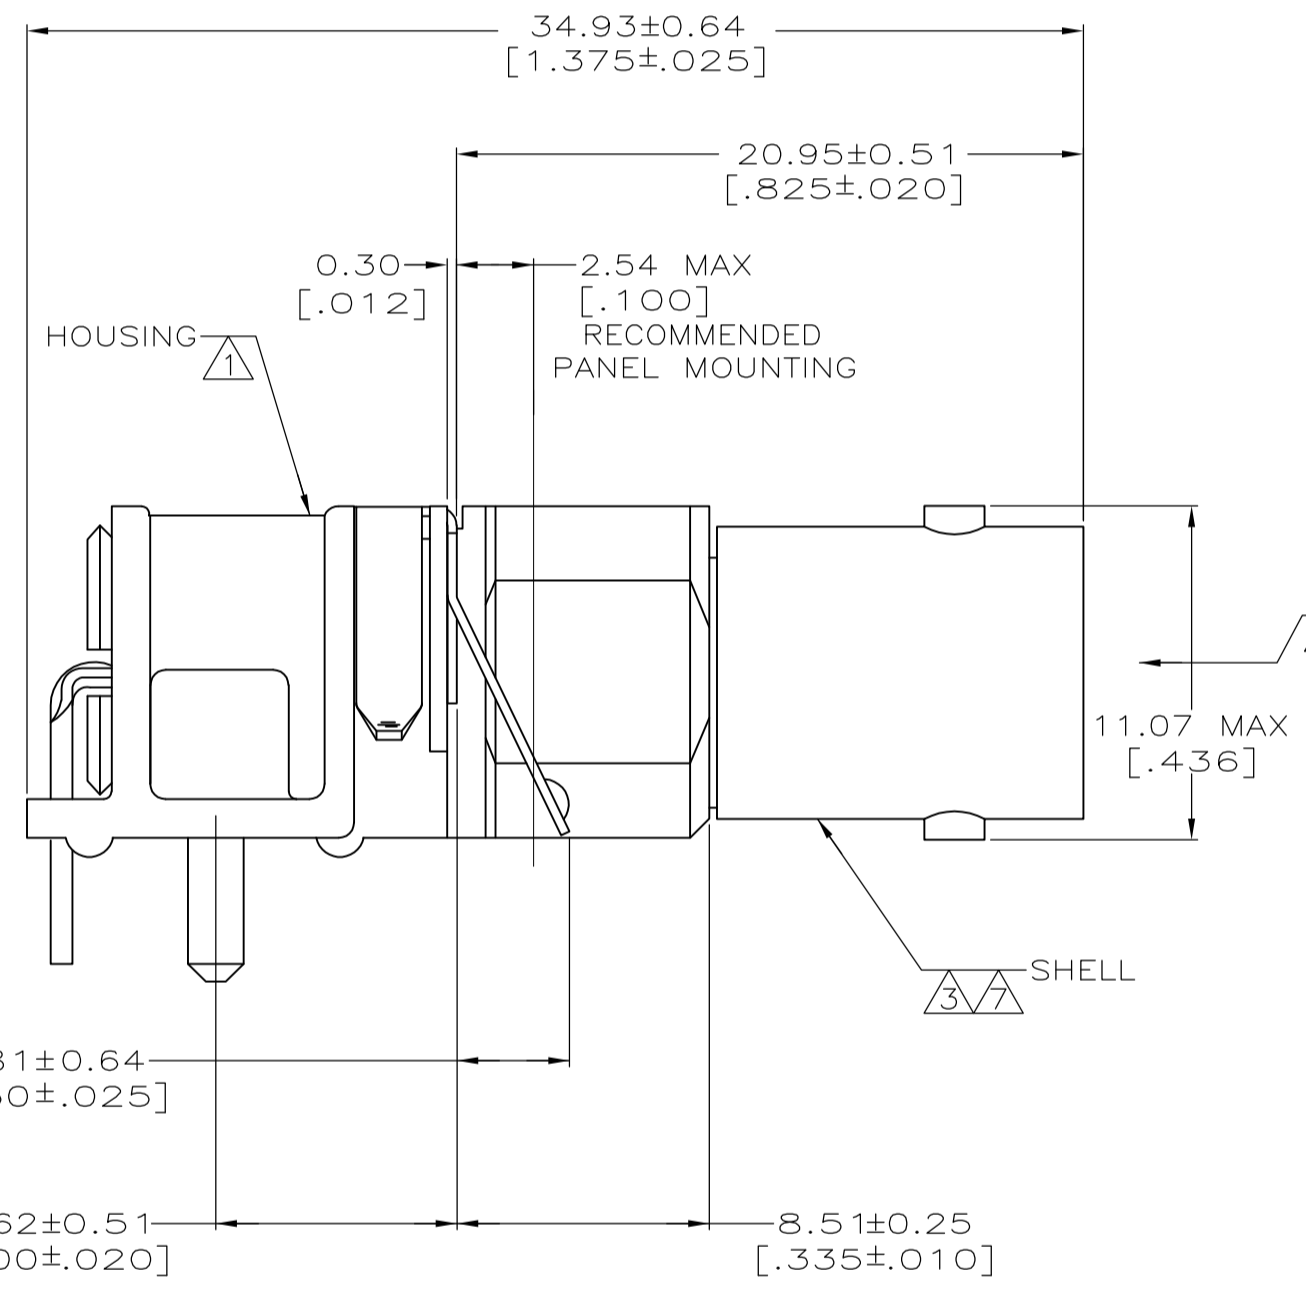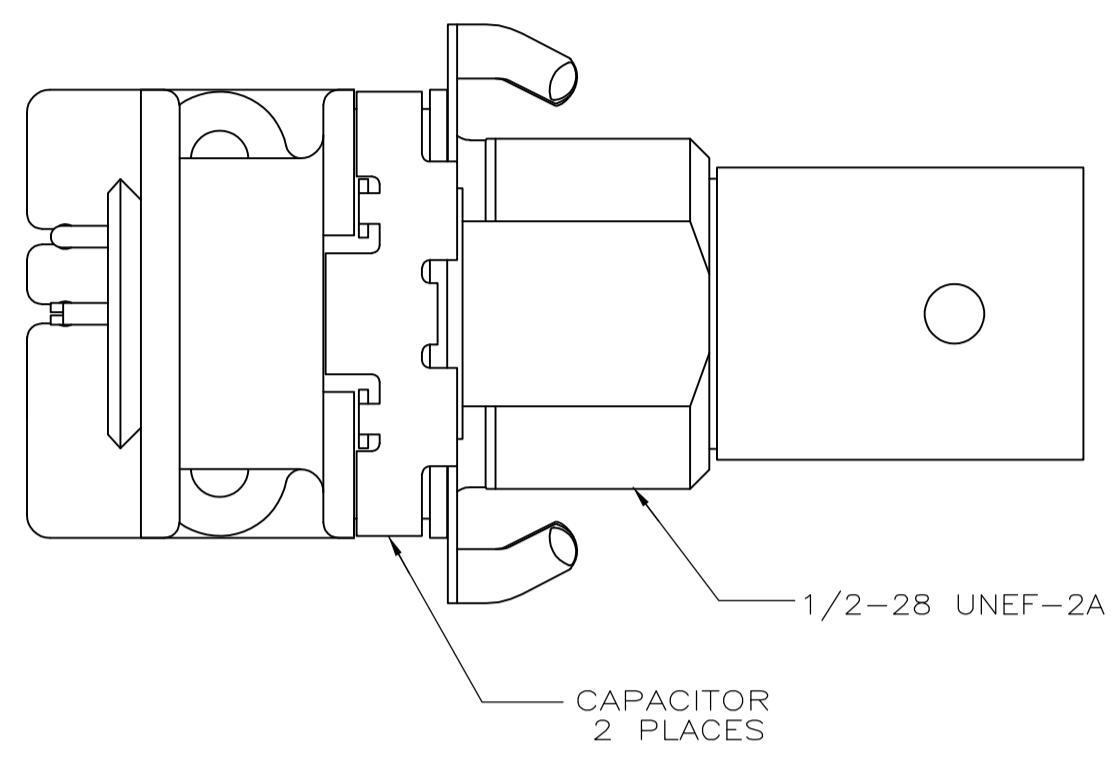

VIEW A

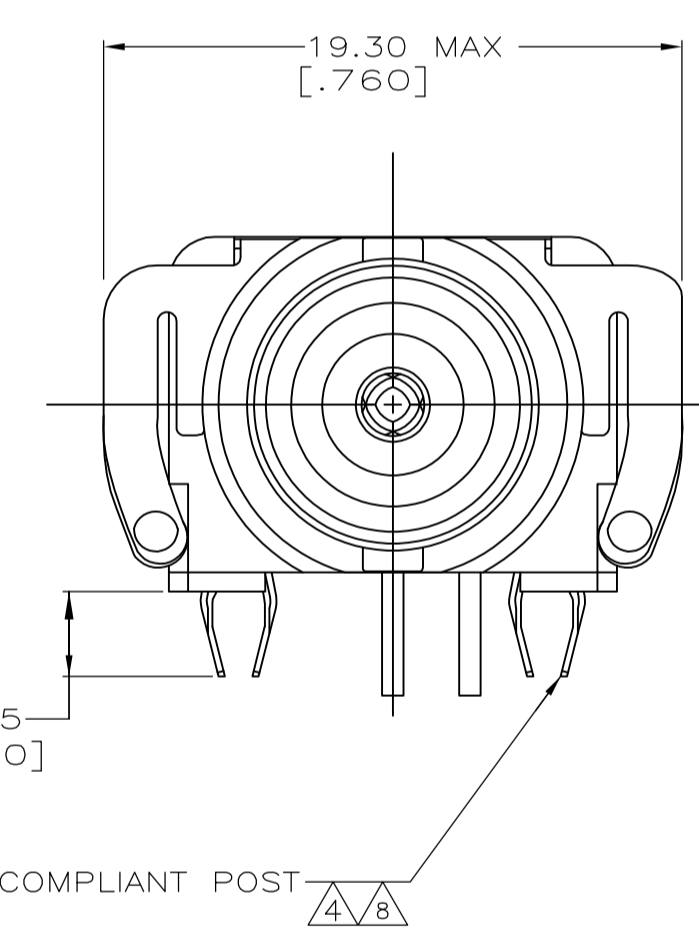

VIEW B

- 1 POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:BLACK
- 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3 ZINC PER QQ-Z-363.
- 4 PHOSPHOR BRONZE PER QQ-B-750.
- 5 BRASS PER ASTM B 453.
- 6 BRASS PER ASTM B 16.
- 7 NICKEL PLATE PER QQ-N-290, 3.81 μm [0.000150] MINIMUM THICK.
- 8 TIN PLATE PER ASTM B 545.
- 9 GOLD PLATE PER ASTM B 488, 0.08 μm [0.000003] MINIMUM THICK.
- 10 NICKEL PLATE PER QQ-N-290.
- 11. SEE INSTRUCTION SHEET 408-2769.
- 12. CAPACITANCE: 9400 pf
VOLTAGE: 1500 VDC.
- 13 TRAY PACKAGING.
- 14 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

14	13	OBSOLETE	4.01±0.25 [0.158±0.010]	3.43±0.38 [0.135±0.015]	A	-5415103-4-
14	13	OBSOLETE	2.03±0.13 [0.080±0.005]	2.79±0.25 [0.110±0.010]	A	-5415103-3-
			-	3.43±0.38 [0.135±0.015]	B	5415103-2
			4.01±0.25 [0.158±0.010]	3.43±0.38 [0.135±0.015]	A	5415103-1
			D	C	VIEW	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± 0.20 [0.008]	3 PLC ± -	4 PLC ± -	ANGLES ± -	
MATERIAL SEE NOTES 1 - 6	FINISH SEE NOTES 7 - 10	WEIGHT	SCALE	4:1	SHEET	1 of 1	REV	C1

APPROVED: J. HAVENER, J. LIPPERT

NAME: JACK, DECOUPLER, PCB, 75 OHM, RIGHT ANGLE, BNC

SIZE: A1

00779

5415103

CUSTOMER DRAWING

Tyco Electronics Corporation, Harrisburg, PA 17105-3608