# 2-2213699-4 × OBSOLETE

## LUMAWISE | LUMAWISE LED Holders

TE Internal #: 2-2213699-4 TE Internal Description: LUMAWISE DRIVE Z50- ON/OFF, 0.7A, 16X19 LUMAWISE Drive Type Z50: On/Off Series

#### View on TE.com >

Connectors > Lighting Connectors > LED Holders > LUMAWISE Drive Type Z50: On/Off Series



Compatible LED: Lumileds 120206xCx, Lumileds 1202CRSP, Lumileds 1202s, Lumileds 1203CRSP, Lumileds L2C5-XXXX1202E0900, Lumileds L2C5-XXXX1203E0900, Nichia NFCLL060B-V1, Nichia NFCWL036B-V1M3, Nichia NFCWL060B-V1, Nichia NVCWL024Z, Samsung LC040C

Lighting Connector Features Included: Driver on Board, Enables Zhaga Compatibility, Not Dimmable, Not Programmable, Optic

### Compatible, Thermal Protection

Operating Voltage: 48 VDC

Termination Method to Wire & Cable: Mini CT Connector



Connector System: Wire-to-Device

## All LUMAWISE Drive Type Z50: On/Off Series (0)

## Features

## **Product Type Features**

| LED Holders Product Type             | LED Holder  |
|--------------------------------------|---|
| COB Substrate Thickness              | 1 mm  |
| Connector System                     | Wire-to-Device  |
| Configuration Features               |   |
| Lighting Connector Features Included | Driver on Board, Enables Zhaga<br>Compatibility, Not Dimmable, Not<br>Programmable, Optic Compatible, Thermal<br>Protection |
| Number of Positions                  | 2   |
| Electrical Characteristics           |   |
| Operating Voltage                    | 48 VDC  |
|                                      |   |

LUMAWISE DRIVE Z50- ON/OFF, 0.7A, 16X19



## **Body Features**

| Compatible LED   | Lumileds 120206xCx, Lumileds 1202CRSP,<br>Lumileds 1202s, Lumileds 1203CRSP,<br>Lumileds L2C5-XXXX1202E0900, Lumileds<br>L2C5-XXXX1203E0900, Nichia NFCLL060B-<br>V1, Nichia NFCWL036B-V1M3, Nichia<br>NFCWL060B-V1, Nichia NVCWL024Z,<br>Samsung LC040C |
|------------------|--|
| Contact Features |  |

| Contact Mating Area Plating Material | Gold                |
|--------------------------------------|---------------------|
| Contact Base Material                | Copper Alloy        |
| Termination Features                 |                     |
| Termination Method to Wire & Cable   | Mini CT Connector   |
| Housing Features                     |                     |
| Housing Material                     | PBT                 |
| Usage Conditions                     |                     |
| Operating Temperature Range          | 0-125 °C[32-257 °F] |

## Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions  |
|---|--|
| EU ELV Directive 2000/53/EC                   | Not Yet Reviewed   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUL 2017<br>(174)<br>SVHC > Threshold:<br>Not Yet Reviewed |
| Halogen Content                               | Not Yet Reviewed for halogen content   |
| Solder Process Capability                     | Not reviewed for solder process capability   |
|   |  |

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

#### LUMAWISE DRIVE Z50- ON/OFF, 0.7A, 16X19




materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# Also in the Series | LUMAWISE LED Holders



# Customers Also Bought

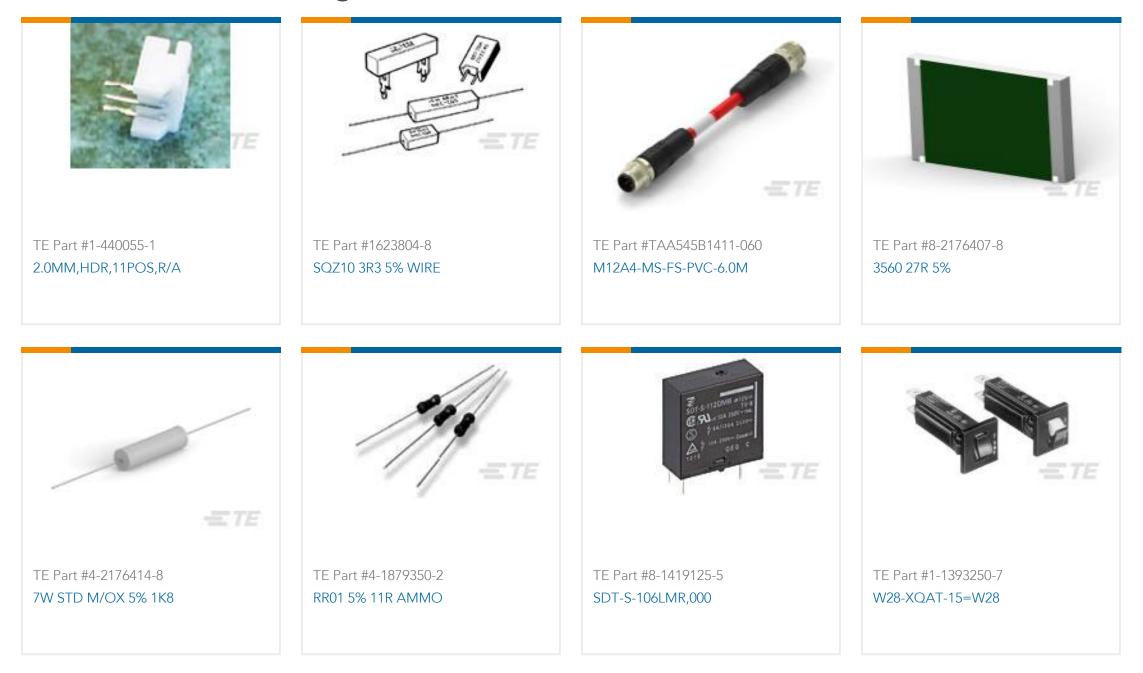

## Documents

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2213699-4\_1.2d\_dxf.zip

English

**Customer View Model** 

**C** For support call+1 800 522 6752

LUMAWISE DRIVE Z50- ON/OFF, 0.7A, 16X19



ENG\_CVM\_CVM\_2-2213699-4\_1.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_2-2213699-4\_1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages LUMAWISE Drive LED Holder Type Z50 Presentation

English

Product Specifications Application Specification

English

Agency Approvals

UL Report

English