


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/31/15	N.D.



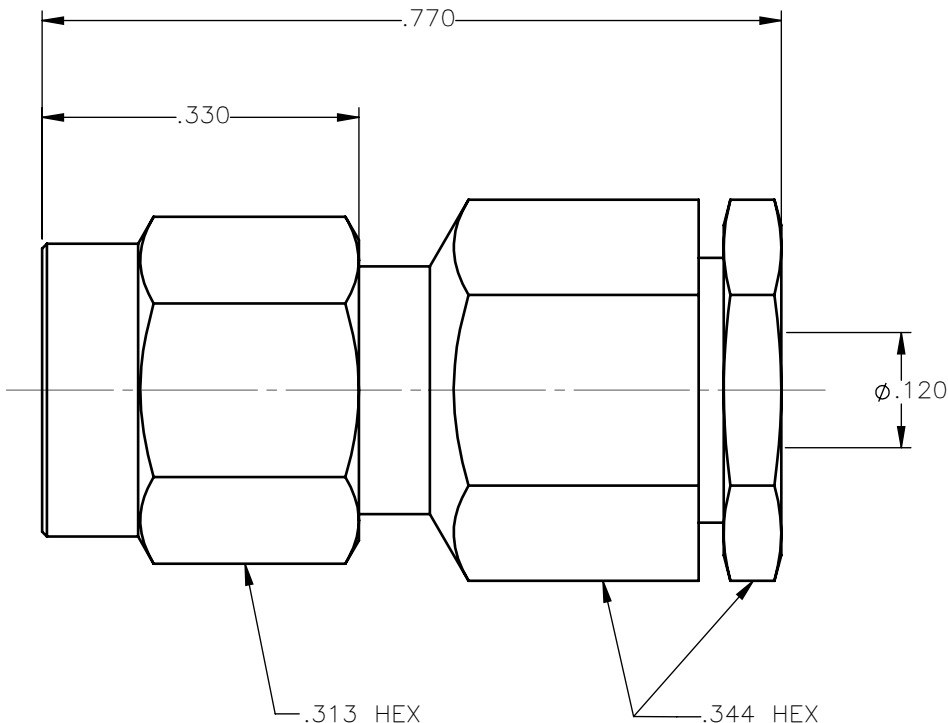


NOTES:

MATERIALS:

1. BODY & COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT & RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. SOLDER FITTING & COMPRESSION NUT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
5. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. SOLDER SLEEVE & COMPRESSION NUT = GOLD PLATE PER ASTM B488-01, TYPE II, 30μin MIN, GRADE C OVER 100 TO 200μin COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER ASTM B488-01, TYPE II, 50μin MIN, GRADE C, OVER 100 TO 200μin STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
3. BODY = GOLD PLATE PER ASTM B488-01, TYPE II, 30μin MIN, GRADE C, OVER 50 TO 100μin STRESS FREE NICKEL PER QQ-N-290.
4. COUPLING NUT = PASSIVATE PER SAE-AMS-2700

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
	N.D.	03/31/15		
DECIMAL	ANGLE	CHKD:	DATE	SMA STRAIGHT PLUG CLAMP TYPE FOR .086 S/R CABLE
		D.N.	03/31/15	
		APVD:	DATE	
		J.M.	03/31/15	SIZE A FSCM NO. 19505 DWG NO. 9501-1593-010 REV A
REFERENCE:	MATERIALS AND FINISHES:	SEE NOTES		SCALE 5:1 THIRD ANGLE PROJECTION  SHEET 1 OF 1
ORIGINATED: N.D. DATE: 03/31/15				

9501-1593-010