
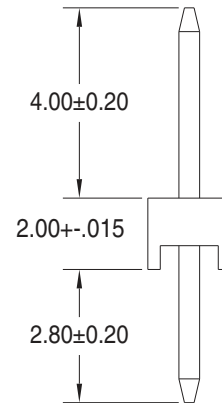
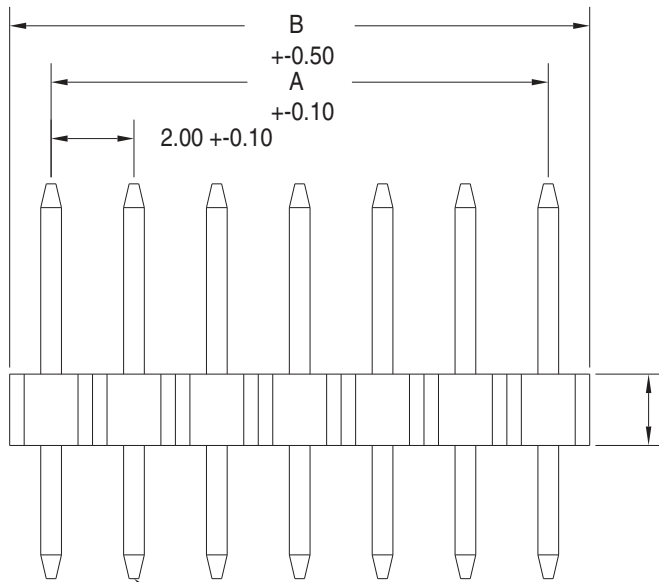


No. of Contacts	DIMENSIONS	
	A	B
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00



0.50X0.50 +0.05

To complete the part number, replace "xx" with number of contacts. The 3rd letter in the part number designates plating. Insert:

P = Gold flash all over

W = Selective Gold Flash / Tin on tail

Z = 10u" selective Gold / Tin on Tail

X = A30u" selective gold / Tin on tail

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40 Degrees C. - +105 Degrees C.
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0
 Contact Finish: Overall Gold or Selective Plating Gold/Tin

Standard Part is:
 PBT
 Overall Gold Flash plating

Contact Sullins Electronics
 for additional plating options
 available.

A	11-27-02	Added information notes
---	----------	-------------------------

SULLINS 801 E. MISSION RD. SAN MARCOS, CA 92069	GENERAL TOLERANCE		SCALE 6:1	DRAWN	DATE	DWG. NO.	TITLE	REV.
	XX. +	XXX. +	UNIT MM	CHECK	DATE	T0016		A
	X. + 0.20	.XXX +		APPROVE	DATE			PARTS NO.
	.X + 0.10	X.B +	SIZE A4				PR_Nxx1PAEN	
.XX + 0.05	.XB +							

A

B

C

D

E