

## Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marshalling panel, Nom. voltage: 250 V, Nominal current: 5 A, Cross section: 0.22 mm<sup>2</sup> - 0.56 mm<sup>2</sup>, AWG: 20 - 24, Connection type: TERMI-POINT, Width: 6.2 mm, Length: 202 mm, Color: gray, Assembly: NS 35/7,5, NS 35/15

### Product Features

- ✓ The red-white marking masks with alternating negative/positive 1 - 10 or a - k labeling clearly distinguish the rows of pins and make the process of connecting and finding specific connections much easier
- ✓ The external housing ridges act as a cable duct side panel, such that good cable routing is ensured and standard cable duct covers can be used
- ✓ The RVS 10 element has ten 2.4 x 0.8 mm TERMI-POINT®(TP) pins for the incoming and outgoing conductors on both sides of the raised labeling rib



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 017918 093600 |
| Weight per Piece (excluding packing) | 68.64 g   |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Poland  |

### Technical data

#### General

|  |      |
|--|------|
| Number of levels                       | 1    |
| Number of connections                  | 20   |
| Color                                  | gray |
| Insulating material                    | PA   |
| Flammability rating according to UL 94 | V2   |
| Rated surge voltage                    | 4 kV |
| Pollution degree                       | 3    |
| Overvoltage category                   | III  |

## Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

### Technical data

#### General

|                           |       |
|---------------------------|-------|
| Insulating material group | I     |
| Nominal current $I_N$     | 5 A   |
| Max. load current         | 5 A   |
| Nominal voltage $U_N$     | 250 V |
| Open side panel           | nein  |
| Number of positions       | 1     |

#### Dimensions

|                  |         |
|------------------|---------|
| Width            | 6.2 mm  |
| Length           | 202 mm  |
| Height NS 35/7,5 | 81.5 mm |
| Height NS 35/15  | 89 mm   |

#### Connection data

|                                       |                      |
|---------------------------------------|----------------------|
| Conductor cross section solid min.    | 0.22 mm <sup>2</sup> |
| Conductor cross section solid max.    | 0.56 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.22 mm <sup>2</sup> |
| Conductor cross section flexible max. | 0.56 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                   |
| Conductor cross section AWG max.      | 20                   |
| Connection method                     | TERMI-POINT®         |
| TERMI-POINT pin dimensions            | 2.4 x 0.8 mm         |
| Position of the TERMI-POINT pin       | vertical             |

#### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141124 |
| eCl@ss 4.1 | 27141124 |
| eCl@ss 5.0 | 27141124 |
| eCl@ss 5.1 | 27141124 |
| eCl@ss 6.0 | 27141124 |
| eCl@ss 7.0 | 27141124 |
| eCl@ss 8.0 | 27141120 |

# Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC000897 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |

## Approvals

### Approvals

---

### Approvals

### EAC

---

### Ex Approvals

---

### Approvals submitted

---


### Approval details

|     |
|-----|
| EAC |
|-----|

## Drawings

# Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Functional drawing

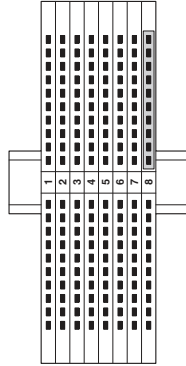

Dimensional drawing

