

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 2. MODIFICATIONS: FLANGE
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 13 AMPS


  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C.
    3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2
    MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
    3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
    3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)


  - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.7 RoHS COMPLIANT
- 4. MATING PART: AT06-3S\* PLUG. (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	
SIZE O.D.		O.D.	WIRE RANGE	
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG	

REVISIONS REV ECO DESCRIPTION DATE APPR A1 RELEASE NUMBER 30/NOV/18 ROOKIE TOMMY





3P RECEPTACLE, FLANGE MOUNT, GRAY

AT04-3P-L012

2


	AT04-3	3P-L012						
	PART N	NUMBER			DESCRIPTION			ITEM
QUANTITY MA				ERI	ALS LI	ST		
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30   Fractions ±1/64		SIGN	ATURES	ES DATE A MONDO				
		DRAWN:	ROOKIE	30/NOV/18	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	30/NOV/18	Sine Systems - www.amphenol-sine.com			
3) Note reference = X		ENGINEER:			44724 Morley Drive			
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	30/NOV/18	Clinton Township, MI 48036			
		CUSTOMER:			3P RECEPTACLE, FLANGE MOUNT, GRAY			
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY, DESIGN FEATURES,						
PROCESS SPECIFICATIONS:		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO MODIFIED		B C-	AT04-3P-I	_012	A1	
NEXT ASS'Y:		MANUFACTURING VARIATIONS.		SCALE: NONE		SHEET 1 C	F 2	


		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER	30/NOV/18	ROOKIE	TOMMY

3P RECEPTACLE, FLANGE MOUNT, GRAY


AT04-3P-L012

Y: **A** 

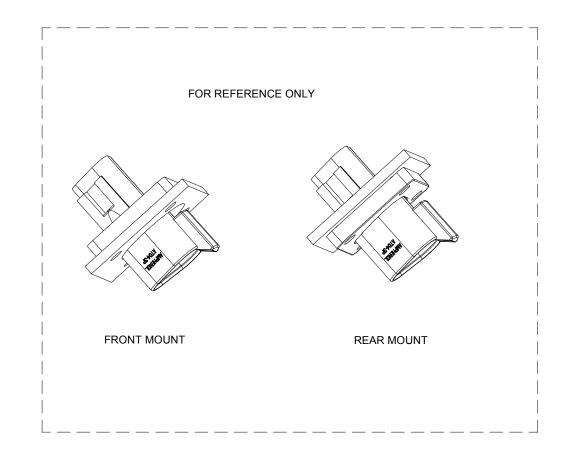

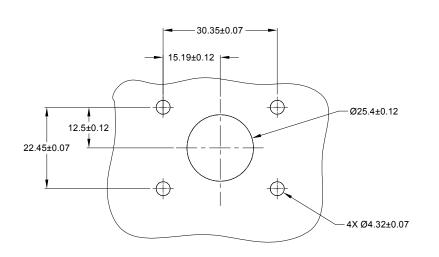

RECOMMENDED CUTOUT FRONT AND REAR MOUNT

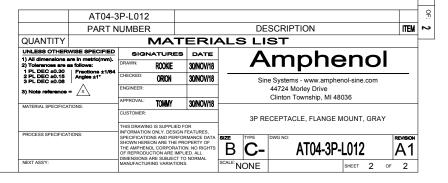

## **AT Series™** - Contact Size 16 Options

Machined Contacts, Sockets & Pins							
Part Number	Description		AWG	Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined			
AT62-209-1631	09-1631 Female Contact - Socket, Gold-plated 16 14 Mach			Machined			
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141 Female Contact - Socket, Nickel-plate		16	14	Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined			
AT62-201-1631 Female Contact - Socket, Gold-plated		16	16-20	Machined			
AT60-202-16141	02-16141 Male Contact - Pin, Nickel-plated 16		16-20	Machined			
AT62-201-16141 Female Contact - Socket, Nickel-plated		16	16-20	Machined			
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined			
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined			
AT60-202-16141-22 Male Contact - Pin, Nickel-plated 16		16	22-24	Machined			
AT62-201-16141-22 Female Contact - Socket, Nickel-plated 16		16	22-24	Machined			

Tooling - Machined Contacts					
Part	Part Number Description				
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)			
5	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)			

	Contact Removal Tools					
Part Part Number		Description				
	ATRT-100	Used for removal of contacts for A Series™ products				
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16				
4	A114017	Sealing Plug, Size 16, White				

Stamped & Formed Contacts, Sockets & Pins							
Part Number	Part Number Description		AWG	Type			
AT60-14-0144	AT60-14-0144 Male Contact - Pin, Gold-plated		14-16	Stamped & Formed			
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed			
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed			
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed			
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed			
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed			
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed			
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed			
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed			
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed			
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed			
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed			
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed			
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed			
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed			
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed			

Tooling - Stamped & Formed Contacts					
Part	Part Number	Description			
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)			
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)			
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)			
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)			
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)			
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)			
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)			

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021