


Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6



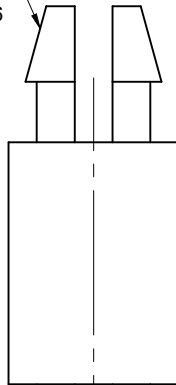


3.6 ± 0.2


L

3.8 ± 0.2

Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6

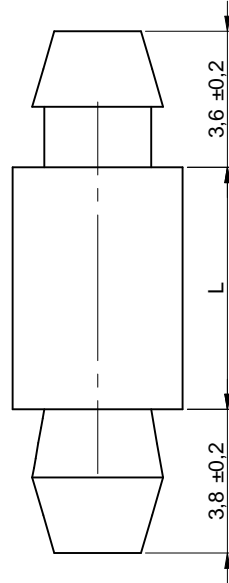

$\varnothing 4,5 \pm 0,2$

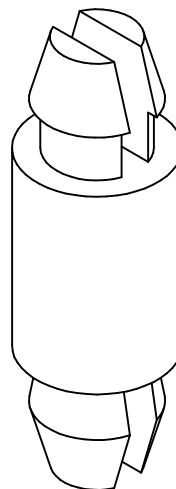

Order Code	L (mm)
701510500	3.2±0,2
701511000	4.8±0,2
701511500	6.4±0,3
701512000	7.9±0,3
701512300	8.6±0,3
701512500	9.5±0,3
701513000	11.1±0,3
701513500	12.7±0,3
701514000	14.3±0,3
701514500	15.9±0,3
701515000	17.5±0,3
701515500	19.1±0,3
701516000	20.6±0,4
701516500	22.2±0,4
701517000	25.4±0,4
701517400	27.0±0,4
701517500	28.6±0,4
701518000	31.7±0,4
701518500	34.9±0,4
701519000	38.1±0,4

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 79 42 945 - 0

www.we-online.com
eiSos@we-online.com



CREATED
D. Fandrey

CHECKED
S. Klingler

PROJECTION
METHOD



SCALE
4:1

DESCRIPTION
AsSNSN
Snap-on keyslot spacer arresting
on both sides

MATERIAL
Nylon 66 UL94-V2

ORDER CODE
70151xxxx

GENERAL TOLERANCE
DIN ISO 2768 T1m

WEIGHT STATUS
Released

REV DATE
1.1 2016-06-29

PAGE
DE 1 / 1