

6

5

4

3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/23/10	
A		UPDATE SPEC.	6/27/16	AY/SC

D

D

C





C

B

B

A

A

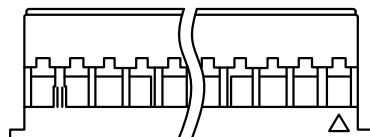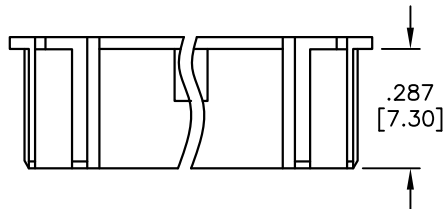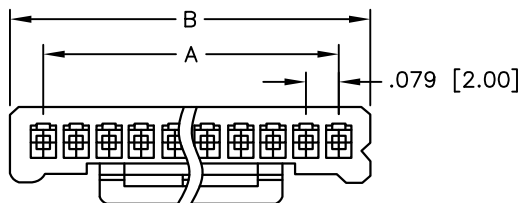

SPECIFICATIONS:

Material:  
Insulator: NY66, rated UL 94V-0  
Insulator color: Natural

Electrical:  
Voltage rating: 250 VAC/DC  
Current rating: 3A AC/DC max, 22AWG  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:  
Operating temperature: -25°C to +85°C

Environmental:  
Lead free, RoHS compliant



Positions: 2 thru 15  
A = .079 [2.00] x No. of Spaces  
B = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	∅X ± .10	TITLE <b>.079 [2.00] CRIMP HOUSING</b>	
.XX ± .020	∅XX ± .015		
.XXX ± .015	∅XXX ± .010		
APPROVALS		DATE	
DRAWN	AY	11/23/10	
CHECKED	AH	11/23/10	
APPROVED			
SIZE	PART NO.	REV.	
X	2CH-H-XX	A	
REF:	S00015T	SCALE:	NTS
		SHEET 1 OF 1	

6

5

4

3

2

1