


**HC-B 24-TMB-100/O1STM40S-EUA**

Order No.: 1604612

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604612>

HEAVYCON ADVANCE for increased environmental requirements,  
sleeve housing B24, with bayonet locking, height 100 mm, with 1xM40  
thread, lateral cable outlet

Commercial data	
GTIN (EAN)	 4 017918 948290
Note	Made-to-order
sales group	D201
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 477 (PC-2009)

## Product notes

WEEE/RoHS-compliant since:  
03/01/2006

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Note	For contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
Design	B24
Height	100 mm
Width	57 mm

Length	152 mm
Housing type	Sleeve housings
Locking type	Bayonet locking
Cable exit	Lateral
Type of the screw connection	1x M40
Degree of protection	IP65/67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Die-cast aluminum, corrosion resistant
Housing surface material	Powder-coated, black
Seal material	Viton
Material lock	High-grade steel
Material grip body interlock	PA-GF
Length of the assembly cutout	112 mm
Width of the assembly cutout	35 mm

#### Accessories

Item	Designation	Description
<b>Assembly</b>		
1604641	HC-B-BF	Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking


#### General

1690969	HC-B 24-TMB-SD-IP65	HEAVYCON ADVANCE IP65 protective cover B24, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm
1604654	HC-B-BF-SET	Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers

## Diagrams/Drawings

### Dimensioned drawing

---

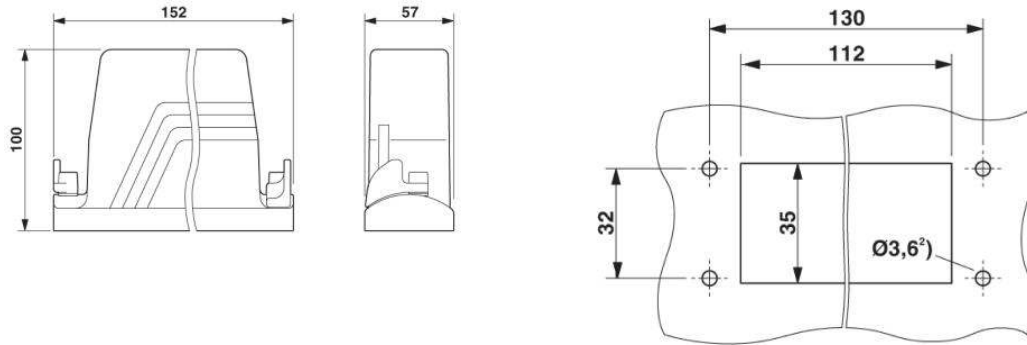

Panel cutout

<sup>2)</sup> When self-tapping Torx screws are used  
(Torx20, M4)

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;