# 826470-3 - ACTIVE

#### AMPMODU | AMPMODU Headers

TE Internal #: 826470-3 PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold, AMPMODU Headers

#### View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



## PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Right Angle

Connector System: Board-to-Board

Number of Positions: 6

Number of Rows: 2

## Features

### Product Type Features

PCB Connector Assembly Type

Connector System

Header Type

PCB Mount Header

Board-to-Board

Partially Shrouded



Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Right Angle
Number of Positions	6
Number of Rows	2
Board-to-Board Configuration	Perpendicular
Electrical Characteristics	
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 Vrms
Body Features	
Connector Profile	Standard
Primary Product Color	Black
Contact Features	

**C** For support call+1 800 522 6752

PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold, AMPMODU Headers



	00/21/2022
Operation/Application	
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Housing Temperature Rating	High
Usage Conditions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Dimensions	
Housing Material	PCT
Centerline (Pitch)	2.54 mm[.1 in]
Housing Features	
Connector Mounting Type	Board Mount
PCB Mount Alignment	Without
PCB Mount Retention	Without
Mating Alignment Type	Polarization
Mating Alignment	With
Mating Retention Type	Detent Latching
Mating Retention	With
Mechanical Attachment	
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post & Tail Length	3.2 mm[.126 in]
Round Termination Post & Tail Diameter	.63 mm[.025 in]
Termination Features	
Contact Current Rating (Max)	5 A
Contact Type	Pin
Contact Mating Area Plating Material Thickness	.8 μm[31.5 μin]
Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Shape & Form	Round
Mating Pin Diameter	.63 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	3 µm

**C** For support call+1 800 522 6752

08/21/2023 11:53AM | Page 2

PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold, AMPMODU Headers



Circuit Application	Signal
Industry Standards	
Agency/Standard	CSA, UL
Approved Standards	CSA LR7189, CUL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	200
Packaging Type	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance	Box Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Pin-in-Paste capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold, AMPMODU Headers





## Also in the Series AMPMODU Headers



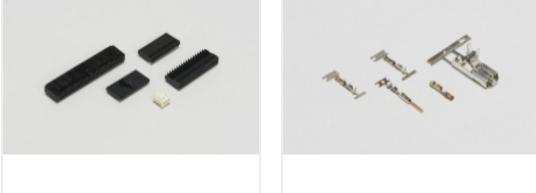

Wire-to-Board Connector Assemblies	Wire-to-Board Connector Contacts(65)
& Housings(5)	

## Customers Also Bought





PCB Mount Header, Right Angle, Board-to-Board, 6 Position, 2.54 mm [.1 in] Centerline, Partially Shrouded, Gold, AMPMODU Headers



## Documents

Product Drawings 2X3P MOD II SHROUDED HEADER, RT ANG.

English

## **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_826470-3\_H.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_826470-3\_H.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_826470-3\_H.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### **Product Environmental Compliance**

**Product Compliance** 

English

**Product Compliance** 

English

Agency Approvals UL Report

English