
PART NUMBER	SSF-LXH4RAHGW	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
07.05.95	UPDATED SPEC. & DIMS WHERE NOTED.		Α
10.18.11	E.C.N. #11763/10BRDR. & REDRAWN.		В

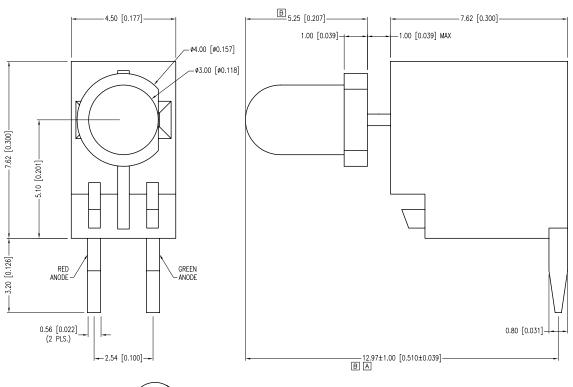


ELECTRO-OPTICAL (	CHARACTERISTICS	Ta=25°C If=20mA			
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	(R/G)	700/565		nm	
FORWARD VOLTAGE	(R/G)	2.0/2.2	2.5/2.6	Vf	
REVERSE VOLTAGE	5.0			Vr	Ir=100µA
AXIAL INTENSITY	(R/G)	3/20		mcd	If=20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED/GREEN				
EPOXY LENS FINISH	: MILKY WHITE	DIFFUSED			

LIMITS	0F	SAFE	OPERATION	ΑT	25°C	

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION (R/G)	120/105	mW
DERATE FROM 25°C	-1.3	mW/*C
OPERATING TEMP.	-40 TO +85	*C
STORAGE TEMP.	-40 TO +85	*C
SOLDERING TEMP.	+260	•C
2.0mm FROM BODY	3	SEC.
k +>10uC		

## NOTES:

- 1. SSL-LX3054HGW RED/GREEN LED.
  2. SSH-LXH4RA LAMP SOCKET.
  3. CUT LED LEADS 5mm LONG.
  4. ASSEMBLE IN SOCKET, POLARITY AS SHOWN.



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.001), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.005), X.XX=±0.05 (±0.005), UNCONTROLLED DOCUMENT

Creating LED and LCD Solutions Together™ WEB: WWW.LUMEX.COM

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

T-1 LAMP, 700/565nm RED/GREEN FAULT INDICATOR.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 10.18.11 DRAWN BY: AΒ PAGE: 1 OF CHKD BY: KF SCALE: NTS APRVD BY: KF (Pb) UNIT: mm [INCH]