













HARSH ENVIRONMENT CONNECTIVITY SOLUTIONS


### LOCKING

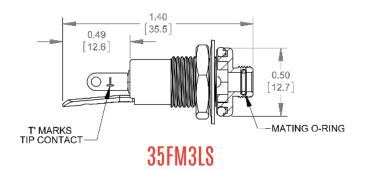


- Mates with any standard 3.5mm plug
- Sealed to IP66 when mated
- Threaded bushing for use with locking plugs
- Rated for 5,000 insertions/ withdrawals minimum
- 3 conductor open circuit
- Durable nickel plated copper housing
- · High quality berylium copper contacts
- Front or rear mount styles available

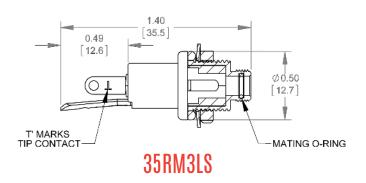

### Part Number Logic



## **FLUSH MOUNT**



- Mates with any standard 3.5mm plug
- Front mount design mounts flush with panel
- Rated for 5,000 insertion/ withdrawals minimum
- 3 conductor open circuit
- Durable nickel plated copper housing
- Silver plated Berylium Copper contacts
- Also available sealed (add "S" to part number)

35FM3

### 

### **COMPACT REAR MOUNT**

- Mates with any standard 3.5mm plug
- Compact design
- 3 conductor open circuit
- Nickel plated brass housing
- Nickel plated brass contacts

# **35PRM3**

