



# *SAW Components*

*Data Sheet B3520*

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a white, glowing, sans-serif font, appearing to be part of a larger, curved structure that resembles the top of the EPCOS logo triangle. The background is dark and textured, with a faint map of the world visible.



SAW Components

B3520

Low Loss Filter for Automotive Telematics

1575,42 MHz

Data Sheet


Ceramic package **DCC6C**

Features

- RF low-loss filter for GPS application
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Hermetically sealed ceramic package
- No matching network required for operation at 50 Ω
- Extended temperature range for automotive application

Terminals


- Ni, gold plated

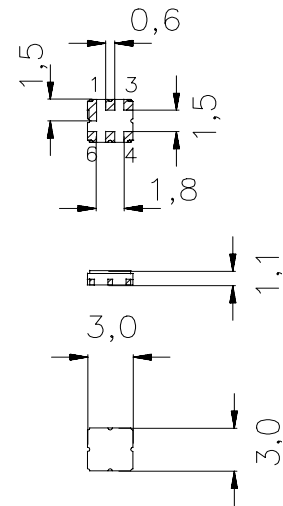

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 2 Input
- 5 Output
- 1,3,4,6 Ground



Type	Ordering code	Marking and Package according to	Packing according to
B3520	B39162-B3520-U410	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	$T_A$	-40/+105	°C	source impedance 50 Ω
Storage temperature range	$T_{stg}$	-40/+105	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_S$	0	dBm	



Data Sheet

Characteristics

Reference temperature:  $T_A = -40 \dots +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ }\Omega$   
 Terminating load impedance:  $Z_L = 50 \text{ }\Omega$

		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	1575,42	—	MHz
<b>Maximum insertion attenuation</b>					
	1574,22 ... 1576,62 MHz $\alpha_{\max}$	—	1,3	1,8	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
	1574,22 ... 1576,62 MHz	—	0,1	1,0	dB
<b>Relative attenuation (relative to <math>\alpha_{\max}</math>)</b>	$\alpha_{\text{rel}}$				
	100,00 ... 1450,00 MHz	40	44	—	dB
	1450,00 ... 1520,00 MHz	30	34	—	dB
	1640,00 ... 1710,00 MHz	25	30	—	dB
	1710,00 ... 1750,00 MHz	35	43	—	dB
	1750,00 ... 1910,00 MHz	42	44	—	dB
	1910,00 ... 2000,00 MHz	40	45	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-30	—	ppm/K



Data Sheet

**Characteristics**


Reference temperature:  $T_A = -40 \dots +105 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 50 \Omega$

		min.	typ.	max.	
<b>Center frequency</b>	$f_c$	—	1575,42	—	MHz
<b>Maximum insertion attenuation</b>					
1574,22 ... 1576,62 MHz	$\alpha_{\max}$	—	1,3	2,0	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
1574,22 ... 1576,62 MHz		—	0,1	1,0	dB
<b>Relative attenuation (relative to <math>\alpha_{\max}</math>)</b>	$\alpha_{\text{rel}}$				
100,00 ... 1450,00 MHz		40	44	—	dB
1450,00 ... 1520,00 MHz		30	34	—	dB
1640,00 ... 1710,00 MHz		25	30	—	dB
1710,00 ... 1750,00 MHz		35	43	—	dB
1750,00 ... 1910,00 MHz		42	44	—	dB
1910,00 ... 2000,00 MHz		40	45	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-30	—	ppm/K




Data Sheet

Transfer function

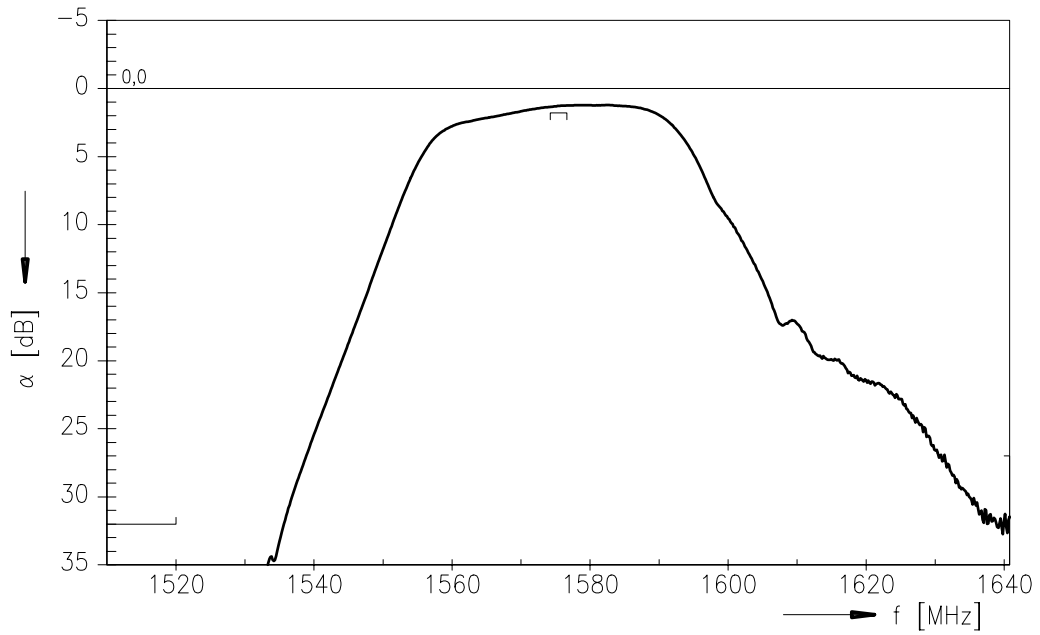

Transfer function (wideband)

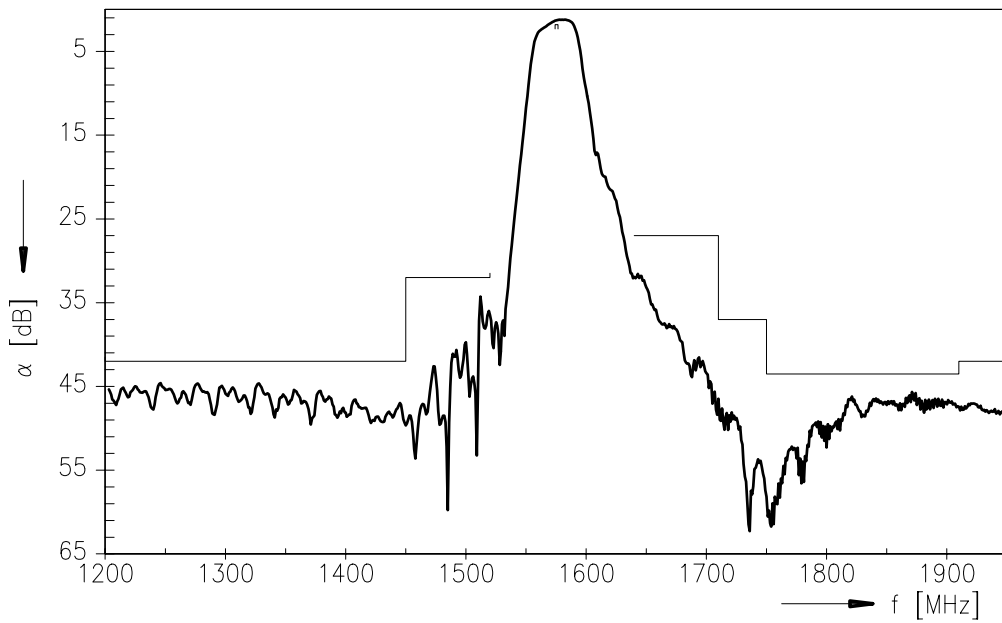



**SAW Components**

**B3520**

**Low Loss Filter for Automotive Telematics**

**1575,42 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE AE PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2004. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.