


1. Wiring Diagram.

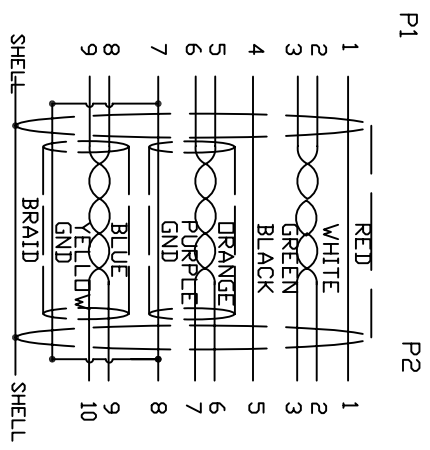

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3Eeach pcs with PE polybag.

5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2	A	INITIAL RELEASE	2014/08/28	
4	PVC	45P PVC BLACK OVERMOLD	25g		REV	ECN#		
3	PE	LLDPE 500026 6201	16g		Cnc Tech, LLC P/N: 103-1092-BL-00300 TITLE: CABLE USB3.0 A/M TO MICRO B MALE			
2	CONN	USB3.0 A/M G/F BLUE	1	P1				
1	CABLE	《28AWG (7/0.12TC) *P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *IP+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	3000mm	DRAWN	WENC	DATE	08/24/14
					CHECKED	EDWIN	DATE	08/24/14
					APPROVAL			
DESCRIPTION					CUSTOMER P/N:			
BILL OF MATERIAL					SHEET 1 OF 1			