



## AM4457F3C

### 1.5 mm Side Look Infrared Emitting Diode

#### DESCRIPTION

- F3 Made with Gallium Arsenide Infrared Emitting diodes


#### FEATURES

- Side looking package
- Mechanically and spectrally matched to the phototransistor
- RoHS compliant


#### APPLICATIONS

- Infrared Illumination for cameras
- Machine vision systems
- Surveillance systems
- Industrial electronics
- IR data transmission
- Remote control

#### PACKAGE DIMENSIONS

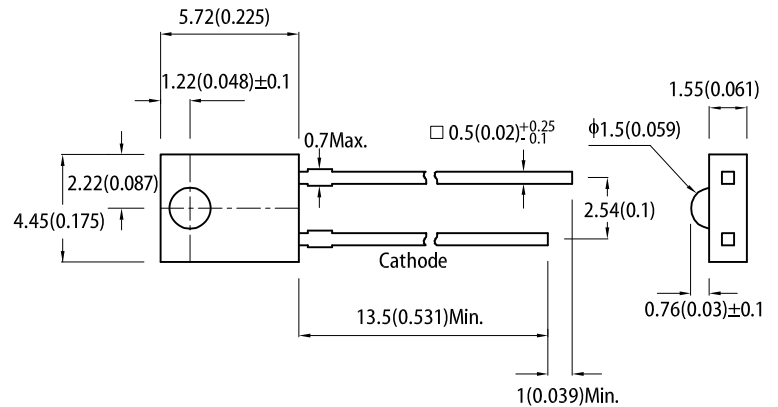

#### Recommended PCB Layout



REMAK :The IR LED can be driven at 100mA, with at a max pulse width of 20ms,The maximum duty cycle is 20%.

#### Notes:

- All dimensions are in millimeters (inches).
- Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
- The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

#### SELECTION GUIDE

| Part Number | Emitting Color (Material) | Lens Type   | Po (mW/sr) @ 20mA <sup>[2]</sup> |      | Viewing Angle <sup>[1]</sup> |
|-------------|---------------------------|-------------|----------------------------------|------|------------------------------|
|             |                           |             | Min.                             | Typ. | 2θ1/2                        |
| AM4457F3C   | Infrared (GaAs)           | Water Clear | 3                                | 7    | 70°                          |
|             |                           |             | *2                               | *5   |                              |

Notes:  
 1.  $\theta_{1/2}$  is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.  
 2. Radiant Intensity / luminous flux: +/-15%.

\* Radiant intensity value is traceable to CIE127-2007 standards.

**ELECTRICAL / OPTICAL CHARACTERISTICS at T<sub>A</sub>=25°C**

| Parameter   | Symbol                        | Emitting Color | Value |      | Unit |
|---|-------------------------------|----------------|-------|------|------|
|   |                               |                | Typ.  | Max. |      |
| Wavelength at Peak Emission I <sub>F</sub> = 20mA                 | $\lambda_{\text{peak}}$       | Infrared       | 940   | -    | nm   |
| Spectral Bandwidth at 50% $\Phi$ REL MAX<br>I <sub>F</sub> = 20mA | $\Delta\lambda$               | Infrared       | 50    | -    | nm   |
| Capacitance   | C                             | Infrared       | 90    | -    | pF   |
| Forward Voltage I <sub>F</sub> = 20mA                             | V <sub>F</sub> <sup>[1]</sup> | Infrared       | 1.2   | 1.6  | V    |
| Reverse Current (V <sub>R</sub> = 5V)                             | I <sub>R</sub>                | Infrared       | -     | 10   | uA   |

## Notes:

1. Forward voltage:  $\pm 0.1V$ .
2. Wavelength value is traceable to CIE127-2007 standards.
3. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

**ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub>=25°C**


| Parameter                               | Symbol                         | Value               | Unit |
|---|--------------------------------|---------------------|------|
| Power Dissipation                       | P <sub>D</sub>                 | 80                  | mW   |
| Reverse Voltage                         | V <sub>R</sub>                 | 5                   | V    |
| Junction Temperature                    | T <sub>j</sub>                 | 115                 | °C   |
| Operating Temperature                   | T <sub>op</sub>                | -40 to +85          | °C   |
| Storage Temperature                     | T <sub>stg</sub>               | -40 to +85          | °C   |
| DC Forward Current                      | I <sub>F</sub>                 | 50                  | mA   |
| Peak Forward Current                    | I <sub>FM</sub> <sup>[1]</sup> | 1.2                 | A    |
| Electrostatic Discharge Threshold (HBM) | -                              | 8000                | V    |
| Lead Solder Temperature <sup>[2]</sup>  |                                | 260°C For 3 Seconds |      |
| Lead Solder Temperature <sup>[3]</sup>  |                                | 260°C For 5 Seconds |      |

## Notes:


1. 1/100 Duty Cycle, 10 $\mu$ s Pulse Width.
2. 2mm below package base.
3. 5mm below package base.
4. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.

## TECHNICAL DATA

### RELATIVE INTENSITY vs. WAVELENGTH

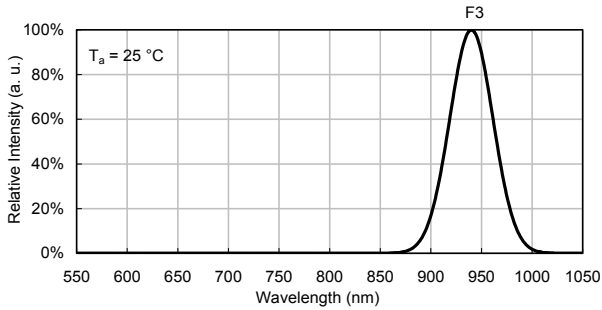


### SPATIAL DISTRIBUTION

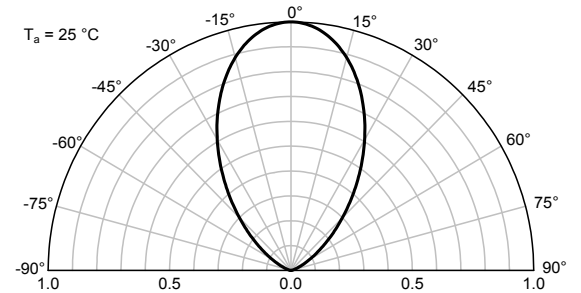


## INFRARED


Forward Current vs. Forward Voltage




Radiant Intensity vs. Forward Current

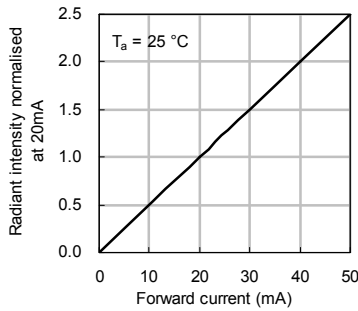



Forward Current Derating Curve



Radiant Intensity vs. Ambient Temperature

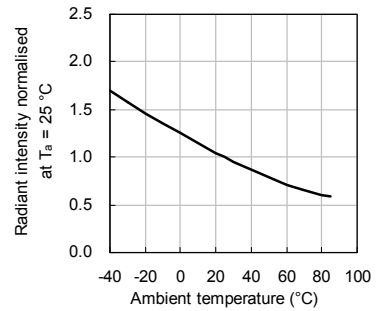

## PACKING & LABEL SPECIFICATIONS

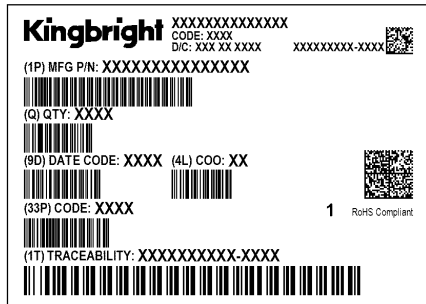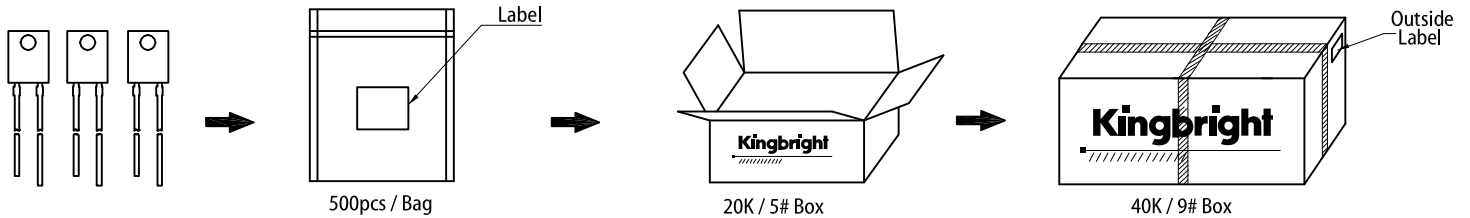

## PRECAUTIONARY NOTES

- The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- All design applications should refer to Kingbright application notes available at <http://www.KingbrightUSA.com/ApplicationNotes>