
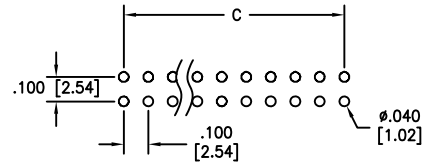
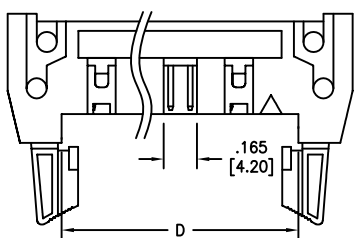


6 5 4 3 2 1

APPROVED: _____
 DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/11	
A		ADDED DRAWING	12/25/18	AY/RC1

60, 64 PIN


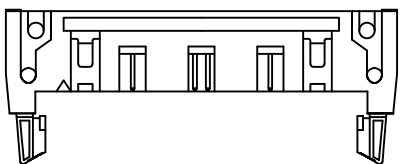


RECOMMENDED PCB LAYOUT

20, 24, 26, 30, 34, 40, 50 PIN

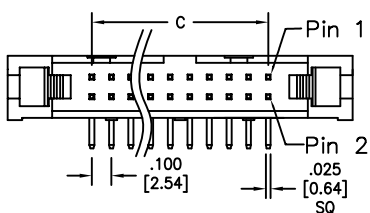

10, 14, 16 PIN

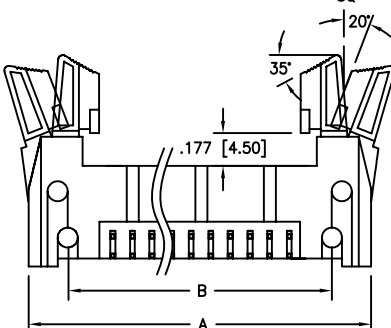

Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64
 A = .100 [2.54] x No. of Spaces + .860 [21.84]
 B = .100 [2.54] x No. of Spaces + .460 [11.68]
 C = .100 [2.54] x No. of Spaces
 D = .100 [2.54] x No. of Spaces + .307 [7.80]

SPECIFICATIONS:

Material:
 Insulator: PBT, glass fiber, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold over Nickel underplate overall
 Electrical:
 Current rating: 1 Amp
 Contact resistance: 10 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	∅X ± .10	
.XX ± .020	∅XX ± .015	
.XXX ± .015	∅XXX ± .010	
APPROVALS		DATE
DRAWN	AY	11/11/11
CHECKED	AH	11/11/11
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **LATCHED BOX HEADER, RIGHT ANGLE, SHORT EJECTOR LATCHES**

SIZE X	PART NO. MHR-XX-HUAS	REV.P A
REF: S00059T	SCALE: NTS	SHEET 1 OF 1