SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED; UL 1283 CSA CERTIFIED: CSA C22,2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 6 AMP/40°C, 120/250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

@ 120V 60Hz 2.0µА 5.0uA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In. IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS: T = T = $\sqrt{100}$ = Te

100 - Ta $I_0 = I_r -$ 60

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: ~40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONOS

CUSTOMER DRAWING CATALOG # 6EHG1-2 **APPRVD** ECN# DATE

TEST SPECIFICATIONS:

INDUCTANCE: 0.93 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND:

N/A μF±20% μF±20%

LINE TO LINE: 0.10 DISCHARGE RESISTOR: 1.5 MA

L/G AND L/L I.R.

NO DISCHARCE RESISTOR:

6000M₁ (MIN.) @ 100VDC, 20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND; 1500 VAC OR 2250 VDC FOR 1 MINUTE

LINE TO LINE: 1450 VOC FOR 1 MINUTE

<u>FILTER</u> APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

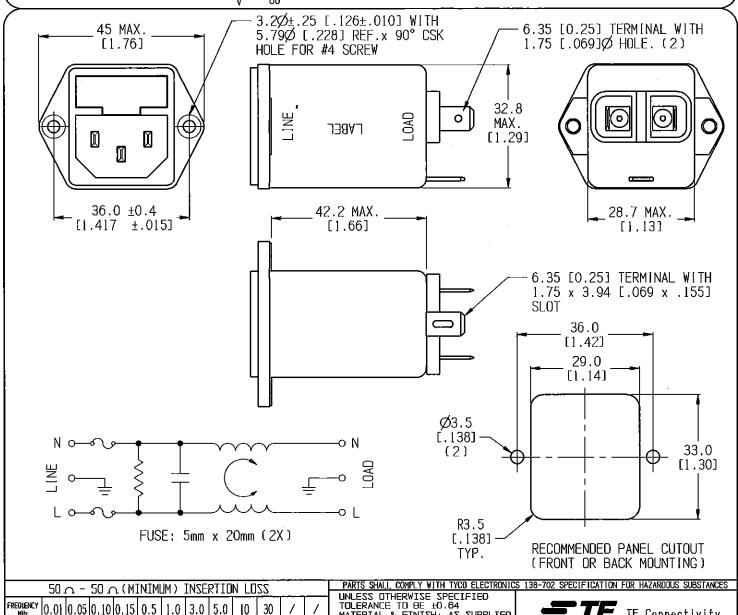

0.01 | 0.05 | 0.10 | 0.15 | 0.5 1.0 3.0 5.0 10 COMMON 10 18 18 14 14 14 14 4 ďΘ OIFF. 4 30 30 30 30 30 30 ďΒ THIS INFORMATION IS CONFIDENTIAL AND PROPRIETIARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWISE SUSSICILARIES AND AFFILIATES. IT MAY NO BE DISCUSSED TO ANYONG PITES THAN YOU ELECTRONICS PRESENTED, WITHOUT AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. SHEET SIZ NUMBER OF THE 0 6EHG1-2 C.ckd

UNLESS OTHERWISE SPECIFIED
TOLERANCE TO BE ±0.64
MATERIAL & FINISH: AS SUPPLIED
DIMENSIONS IN MILLIMETERS NOTES:

TE Connectivity

CUSTOMER DRAWING

TE PART ND.: 6609116-3 SCALE: DRAVING AFMOER: DATE: 1000003

6EHG1-2

C