
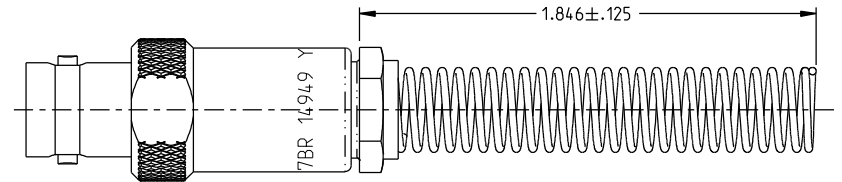
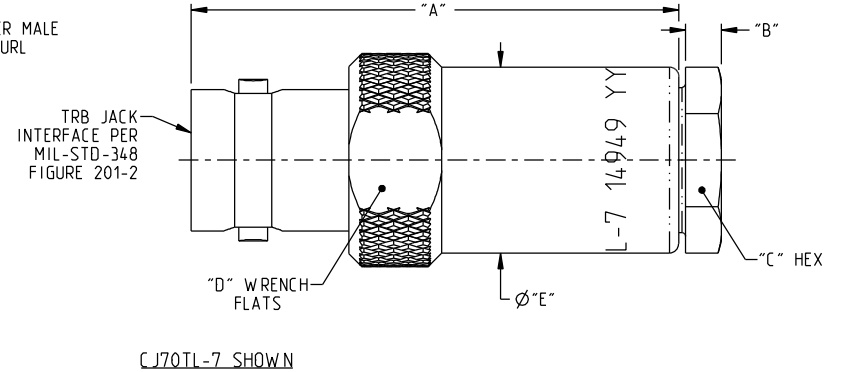
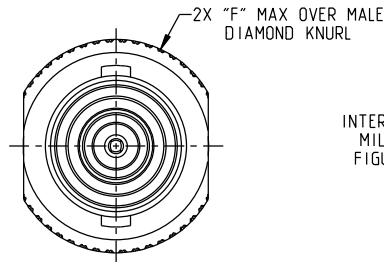


TABLE 1									
MODEL NUMBER	CABLES ACCOMMODATED	ASSEMBLE PER	"A"	"B"	"C"	"D"	Ø"E"	Ø"F"	SH
CJ70TL-7	TRC-50-2 TRC-75-2	TAI-189	1.314	.096	.438	.500	.500	.593	1
CJ70TL-7-1M	TRC-50-2 TRC-75-2	TAI-189	1.314	.096	.438	.500	.500	.593	2
CJ70TL-8	8227 BELDEN	TAI-103	1.648	.130	.625	.688	.750	.775	1
CJ70TL-9	TWC-78-2 TWC-124-2	TAI-102	1.314	.096	.438	.500	.500	.593	1
CJ70TL-10	RG-22 754E W.E.CO.	TAI-103	1.648	.130	.625	.688	.750	.775	1
CJ70TL-11	760A W.E.CO.								
CJ70TL-12	16 PEVL W.E.CO. V1-AL GENERAL	TAI-128							
CJ70TL-13	TRF-59 TIMES	TAI-129							
CJ70TL-13A	8232 BELDEN	TAI-165							
CJ70TL-14	8233 BELDEN	TAI-129							
CJ70TL-23	250-3884 MICRODOT	TAI-189							
CJ70TL-24	202-3934 MICRODOT	TAI-102							
CJ70TL-24A	9530A5117 RAYCHEM	TAI-189							
CJ70TL-25	T-43M GENERAL	TAI-102							
CJ70TL-25A	5021H5331 RAYCHEM	TAI-189	1.314	.096	.438	.500	.500	.593	1
CJ70TL-26	7028A5518 RAYCHEM								
CJ70TL-27	T191PSJ2619EN WOVEN 202-3927 MICRODOT 202-3942 MICRODOT	TAI-102	1.314	.096	.438	.500	.500	.593	1
CJ70TL-29	TWC-78-1 TWC-124-1A								
CJ70TL-30	761A W.E.CO. 8441 BELDEN	TAI-189	1.314	.096	.438	.500	.500	.593	1
CJ70TL-32	TRC-50-1								
CJ70TL-33	TRC-75-1								
CJ70TL-42	21-204 ESSEX 4463 CONSOLIDATED								
CJ70TL-43	250-4044 250-4045 293-3930 MICRODOT	TAI-102	1.648	.130	.625	.688	.750	.775	1
CJ70TL-45	M27500-22TE2T14 1100-66F STANDARD								
CJ70TL-46	9860 BELDEN	TAI-103	1.314	.096	.438	.500	.500	.593	1
CJ70TL-47	M17/176-00002	TAI-102	1.648	.130	.625	.688	.750	.775	1
CJ70TL-49	TWAC-78-1F2								
CJ70TL-54	89207 BELDEN	TAI-103	1.314	.096	.438	.500	.500	.593	1
CJ70TL-55	89272 BELDEN	TAI-102							
CJ70TL-56	GC875GC1. GRUMMAN	TAI-189	1.314	.096	.438	.500	.500	.593	1
CJ70TL-57	GC875GB1. GRUMMAN								
CJ70TL-58	GC875TM24H. GRUMMAN	TAI-102							
CJ70TL-59	GC875LN1. GRUMMAN	TAI-189	1.314	.096	.438	.500	.500	.593	1
CJ70TL-60	M17/177 THERMATICS 380-10045 BOEING								
CJ70TL-64	7528A5314. RAYCHEM								



NOTES: UNLESS OTHERWISE SPECIFIED.

- MATERIAL & FINISH:
  - BODY, CONE & CLAMP NUT: NICKEL PLATED BRASS
  - INSULATOR & DIELECTRIC: PTFE (TEFLON)
  - INTERMEDIATE CONTACT: GOLD PLATED BRASS
  - CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
  - BEND RELIEF SPRING ASSY:
    - NUT NICKEL PLATED BRASS
    - SPRING: PASSIVATED STAINLESS STEEL

- ELECTRICAL:
  - FREQUENCY (MAX): 500 MHz
  - IMPEDANCE: NON-CONSTANT

3. EXAMPLE OF COMPLETE MODEL NUMBER:

CJ70TL - XX XX

— ADD "BR" FOR BEND RELIEF OPTION

— DASH NUMBER PER TABLE 1

— BASE MODEL NUMBER

(UNLESS SPECIFIED DIMENSIONS ARE COMMON TO ALL DASH NUMBERS)

<p>This document is the property of Cinch Connectors. It is to be controlled in nature, non-transferable, and should be used only for the purpose intended. All dimensions are in inches unless otherwise specified.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	<p>RoHS2</p>	<b>TROMPETER</b>	
		TRB CABLE JACK, WRENCH CRIMP	
MODEL NO.: CJ70TL-XXXX	SIZE: B	DATE: 4/2/2018	SHEET: 1 OF 2