


SCALE 5:1

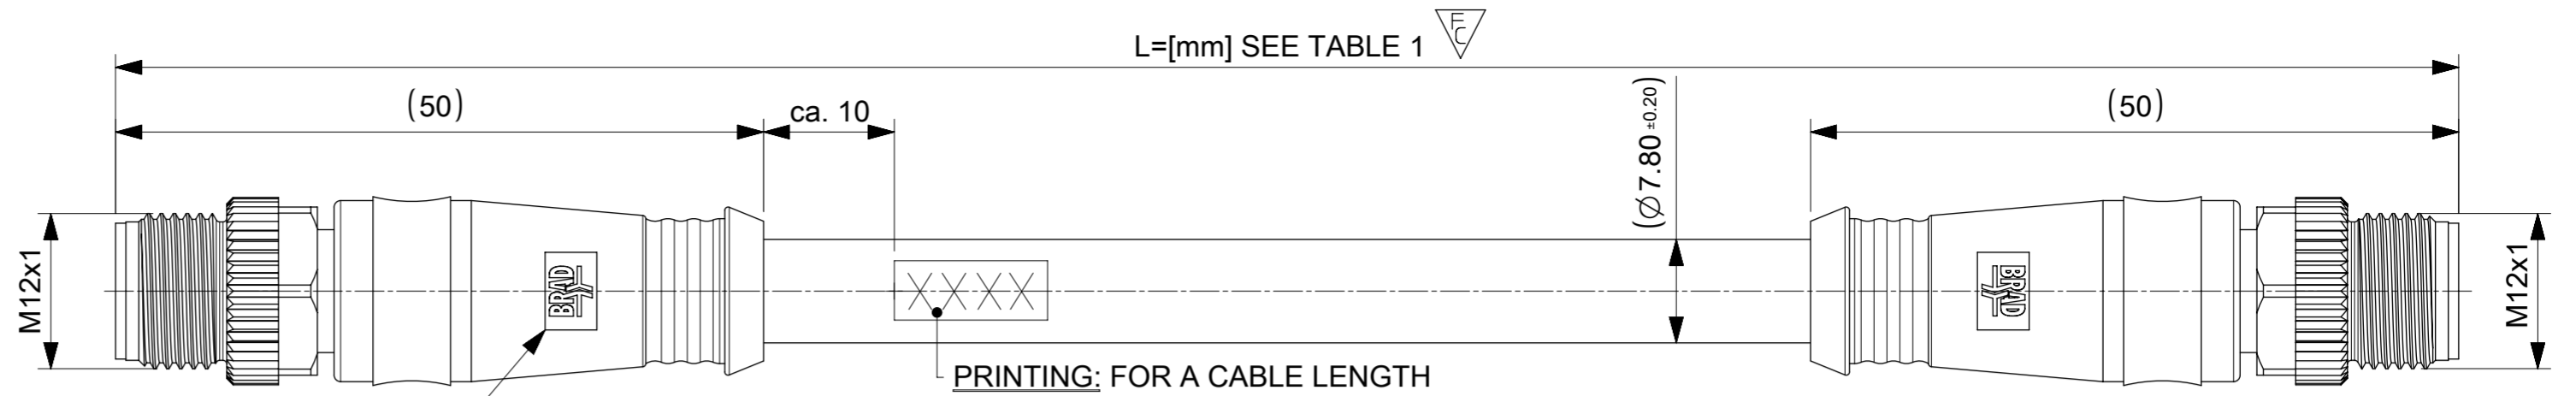

SCALE 2:1

EXAMPLE FOR CABLE PRINTING:  
Molex Connectivity GmbH [15mm] Material-No. from table 1 [8mm] Prod.Date [8mm] Cable length

**DESCRIPTION:**  
M12 HYBRID CORDSET APPLICATIONS  
TRANSMISSION AFTER CAT5e (SIGNAL CONTACTS ONLY)  
SPECIAL CODING

**ELECTRICAL DATA:**  
SIGNAL: 4 POLES  
MAX. VOLTAGE: 30V  
MAX. CURRENT: 1.5A at 55°C  
CONTACT RESISTANCE: <5 mOhm  
INSULATION WITHSTAND: >100 MOhm  
IMPEDANCE: 100 Ohm  
HF PERFORMANCE TESTINGS: LIMITS CLASS D/CAT5e,  
ACCORDING ISO IEC 11801/TIA-568-C.2 "PERMANENT LINK"

**POWER:**  
MAX. VOLTAGE: 30V  
MAX. CURRENT: 6A at 55°C  
CONTACT RESISTANCE: <5 mOhm  
INSULATION WITHSTAND: >100 MOhm

**ENVIROMENTAL:**  
PROTECTION: IP67  
TEMPERATURE RANGE: -25°C to 75°C

**PACKAGING:**  
THE CORDSET IS PACKED AND SHIPPED OUT IN A CARDBOARD BOX

- 1 - POWER 0V
- 2 - POWER 0V Last
- 3 - POWER 24V Last
- 4 - POWER 24V
- 5 - SIGNAL TX+
- 6 - SIGNAL RX-
- 7 - SIGNAL TX-
- 8 - SIGNAL RX+
- SHIELDING / GND

CUSTOMER PRODUCT APPROVAL  
APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_  
MUST BE SIGNED AND RETURNED BEFORE  
PRODUCTION WILL BEGIN

**WIRING DIAGRAM, CONNECTION: INLINE**


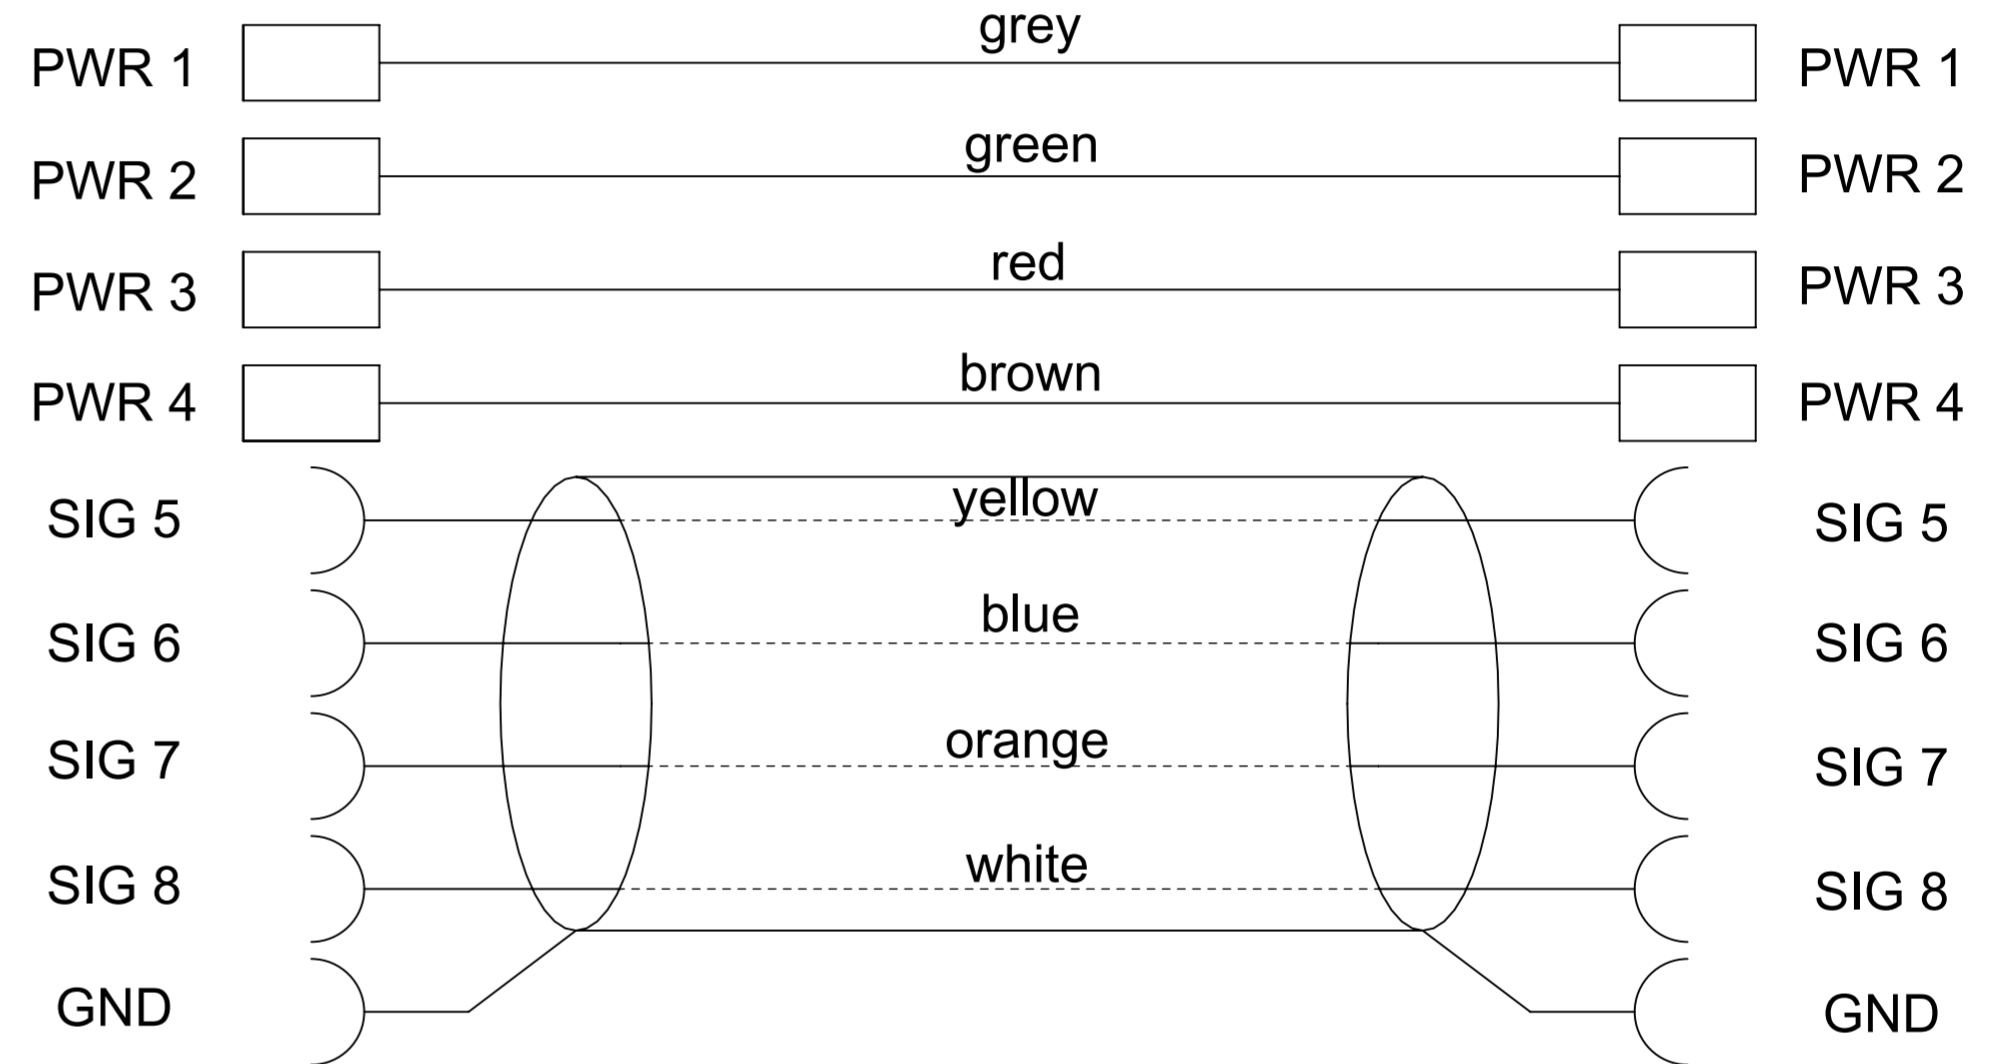


TABLE 1

MOLEX P/N	Description	Length / mm	Tolerance
1202440200	CSE M12 CHT 8P 4+4P MAFE STR PUR 0,25M DE	250	±10
1202440201	CSE M12 CHT 8P 4+4P MAFE STR PUR 0,5M DE	500	±10
1202440202	CSE M12 CHT 8P 4+4P MAFE STR PUR 1M DE	1000	+30/-10
1202440203	CSE M12 CHT 8P 4+4P MAFE STR PUR 1,5M DE	1500	±25
1202440204	CSE M12 CHT 8P 4+4P MAFE STR PUR 2M DE	2000	±25
1202440205	CSE M12 CHT 8P 4+4P MAFE STR PUR 5M DE	5000	±25
1202440206	CSE M12 CHT 8P 4+4P MAFE STR PUR 8M DE	8000	±30
1202440207	CSE M12 CHT 8P 4+4P MAFE STR PUR 10M DE	10000	±30
1202440208	CSE M12 CHT 8P 4+4P MAFE STR PUR 15M DE	15000	±30

**BOM**

Quantity	Descriptions
2	INSERT M12 MA 8P 0C CSE PUR BK SHLD
2	INSERT M12 FE 4P 0C CSE NIL BK SHLD
8	CONTACT 6 FE TUR NI CR WRA 0.14-0.25
8	CONTACT M12 MA NI2AU0.8 F075
2	SHELL M12 FE BRASS NI REC M12
2	SHELL M12 FE BRASS NI REC M12
2	SHELL M12 MF PP L6,5 CORDSET M12
2	NUT M12 BRASS NI MA HEX
1	CABLE 4AWG19+2X2XAWG26 PUR GY D8 UL SH DYN
2	Overmolding UL M12 straight-9.2mm
2	Copper tape tinned 10x20mm / PAGE 3 / DETAIL R

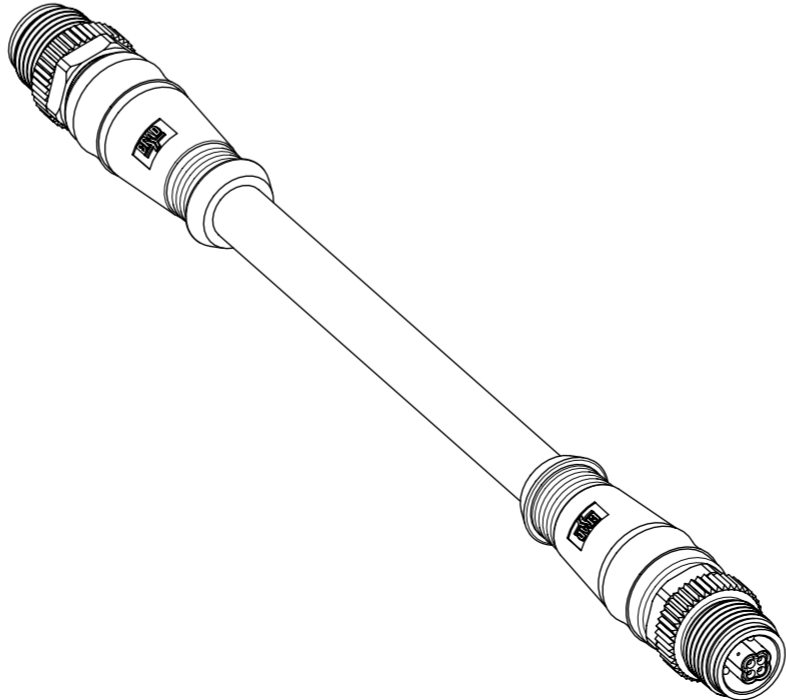

FUNCTIONAL SYMBOLS FA=0 FC=1 FP=0	DIMENSION UNITS: mm		SCALE: 1:1	CURRENT REV DESC: UPDATED NOTES				
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 736317 DRWN: ARPITT 2023/01/26 CHK'D: RSILLER 2023/01/26 APPR: RSILLER 2023/01/26			
	ANGULAR TOL ± °							
	DIVISIONAL SYMBOLS		4 PLACES ±	3 PLACES ±	2 PLACES ± 0.05	1 PLACE ± 0.1	0 PLACES ±	INITIAL REVISION: DRWN: RSCHIEBER 2020/07/15 APPR: RSILLER 2020/08/24
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A2-SIZE	SERIES: 120244	MATERIAL NUMBER: SEE TABLE 1	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1	

CSE M12 CHT 8P 4+4P MAFE STR PUR XM DE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: 1202440200 | DOC TYPE: PSD | DOC PART: 000 | REVISION: A2