
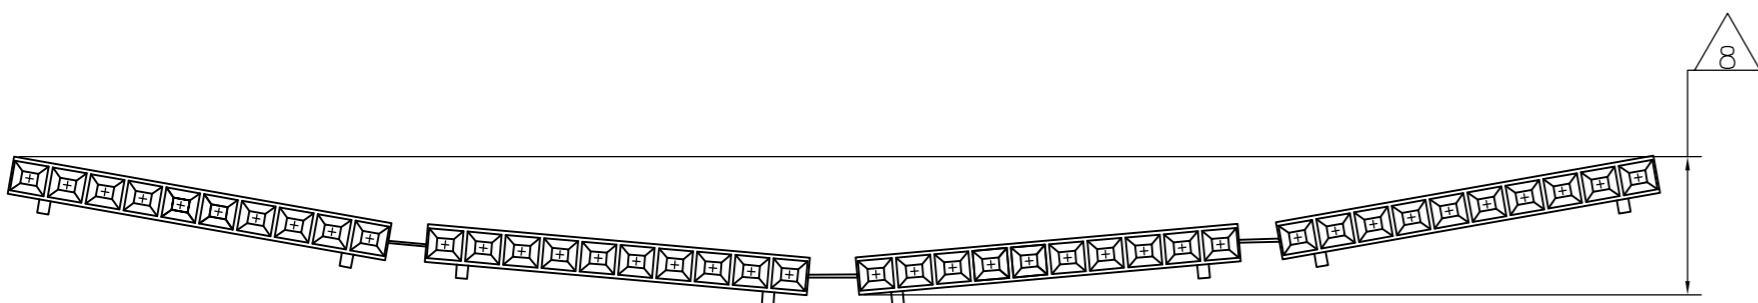


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD		
H		EC 0G3C 0759 04		03FEB05	BSV	JLG		
H1		REVISED PER ECO-09-020689		02SEP09	KK	AEG		

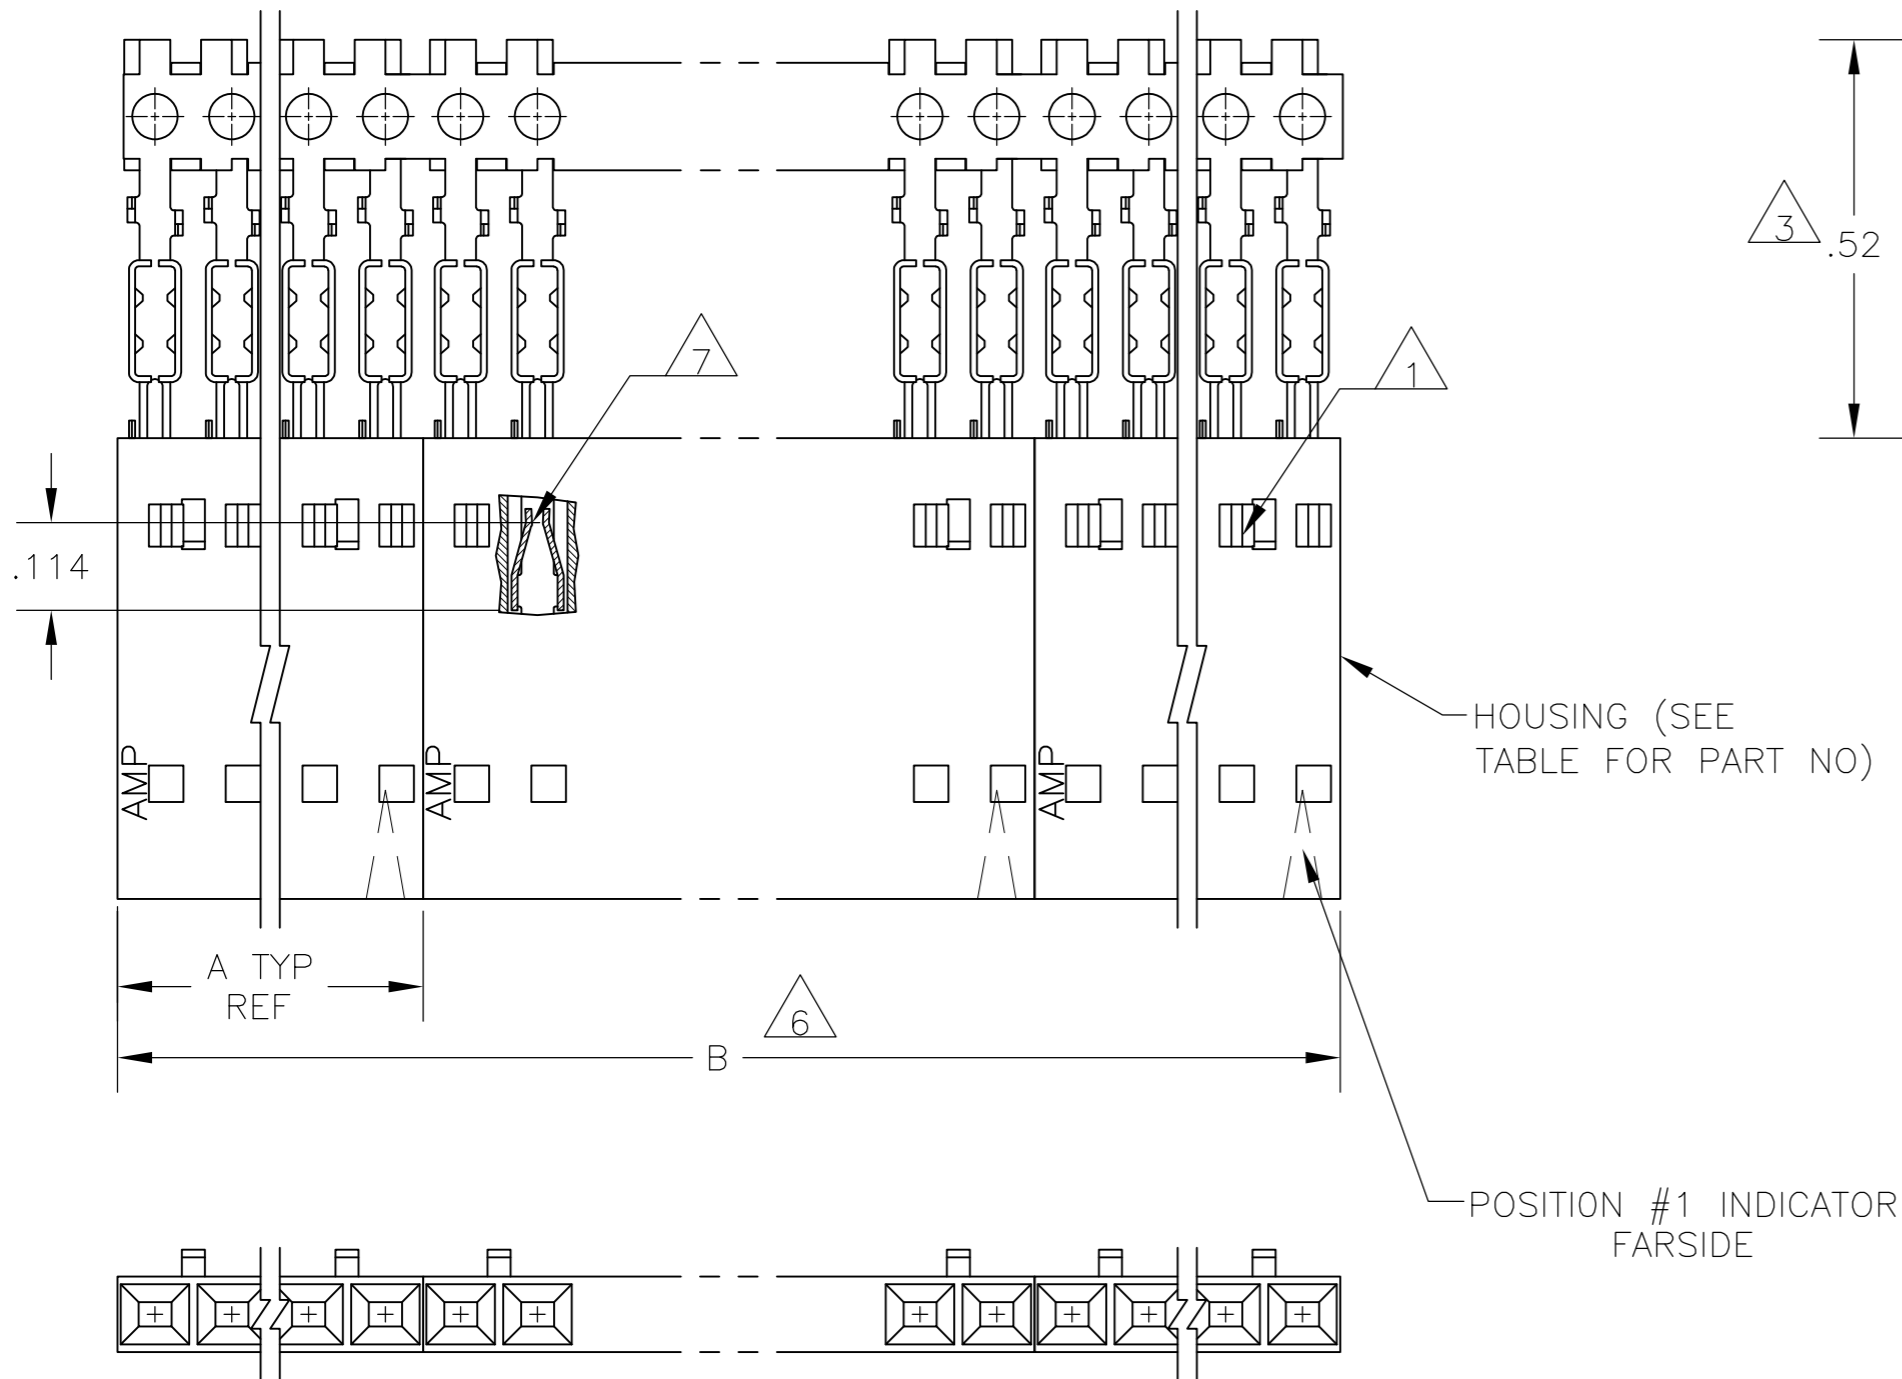

EXMPL: STRIP ASSEMBLY  
SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103901
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

11	10							
11	10	2	2.40	1.198	1-103648-1	12	6-103973-1	
11	10	2	2.20	1.098	1-103648-0	11	6-103973-0	
	10	2	2.00	.998	103648-9	10	5-103973-9	
11	10	2	1.80	.898	103648-8	9	5-103973-8	
11	10	2	1.60	.798	103648-7	8	5-103973-7	
11	10	2	1.40	.698	103648-6	7	5-103973-6	
11	10	4	2.39	.598	103648-5	6	5-103973-5	
	10	4	1.99	.498	103648-4	5	5-103973-4	
	10	5	1.99	.398	103648-3	4	5-103973-3	
	10	8	2.40	.298	103648-2	3	5-103973-2	
	10	10	2.00	.198	103648-1	2	5-103973-1	
11	9	2	2.40	1.198	1-103648-1	12	1-103973-1	
11	9	2	2.20	1.098	1-103648-0	11	1-103973-0	
	9	2	2.00	.998	103648-9	10	103973-9	
11	9	2	1.80	.898	103648-8	9	103973-8	
11	9	2	1.60	.798	103648-7	8	103973-7	
11	9	2	1.40	.698	103648-6	7	103973-6	
11	9	4	2.39	.598	103648-5	6	103973-5	
	9	4	1.99	.498	103648-4	5	103973-4	
	9	5	1.99	.398	103648-3	4	103973-3	
	9	8	2.40	.298	103648-2	3	103973-2	
	9	10	2.00	.198	103648-1	2	103973-1	
		PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L. MAYER	05 NOV 1986	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: INCHES		CHK	P.C.DEJONG	12-11-86	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J SCHIFFER	13-11-86	RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, WITH GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM
0 PLC ± -		PRODUCT SPEC	108-25034	SIZE	
1 PLC ± -		APPLICATION SPEC	114-25026	CAGE CODE	A2 00779
2 PLC ± .02		WEIGHT	-	DRAWING NO	C=103973
3 PLC ± .005		CUSTOMER DRAWING			RESTRICTED TO
4 PLC ± -		SCALE 4:1			SHEET 1 OF 1
ANGLES ± -		REV H1			
FINISH: SEE TABLE					