


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00025	Connector, dc jack, 5.5x2.1xL17.4 mm, molding style	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC	1	
3	24-00004	Overmold, PVC, black	1	

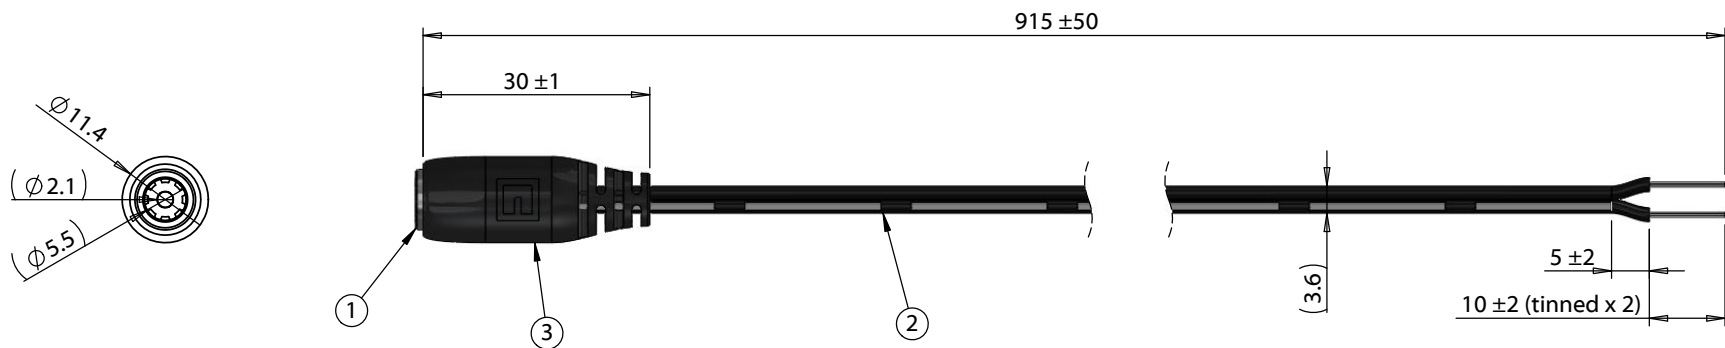

**Notes:**  
Functionally equivalent components may be substituted  
Cable rated for 48 V, 6 A

Wiring diagram	
50-00025	Wire Color
Center	Black with stripe
Sleeve	Black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	6/27/2012	Initial release	AG <small>Digitally signed by AG Date: 2021.05.19 10:33:59 -07'00'</small>	RoHS compliant		
			Verified:	Function test: no open, no short circuit, no intermittent		
			AW <small>Digitally signed by AW Date: 2021.05.19 10:36:09 -07'00'</small>	Description:		
Dimensions are in millimeters.			X: ± 0.5 mm	Cable, 915 mm, 5.5x2.1 mm 50-00025 dc jack to stripped tinned, 24 AWG, 30-00003 wire	Size: A	Part number: 10-01097
Tolerances:			X.X: ± 0.3 mm		Scale: 1:2	
X.XX: ± 0.05 mm						

5 4 3 2 1