


PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

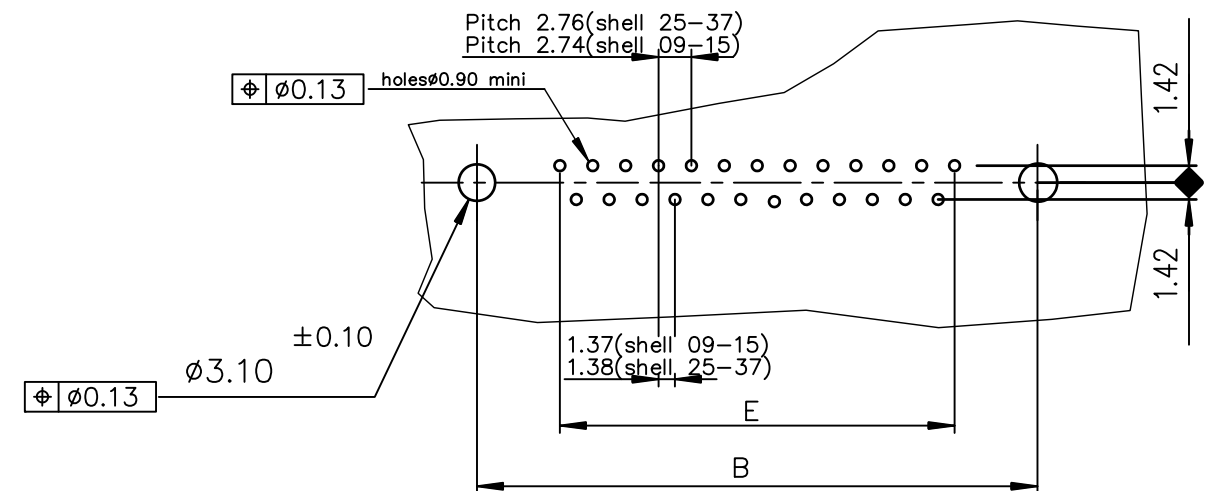

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.GX00LF

Plating: 4 --> Flash Au  
Plating: 6 --> 0.76µ Au

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family		
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB		
ltr	ecn no	dr	date	tolerances unless otherwise specified				title		
J	ELX-I-21654	AB	2015-10-26	angles	linear	MM		FEMALE DELTA-D STRAIGHT, SOLDER TYPE		
				0°±2'		scale 2:1		dwg no		
								sheet 1 of 1		
				dr	JOUBERT	1996-09-10			size	
				enr	ALIAS BABU	2015-10-26			A3	
				chr	MITHUN PAUL	2015-10-26			C01-8646-0495	
				app	BIJU K PAUL	2015-10-26			type Product Customer Drawing	
sheet index	revision sheet	J	1							