

## SEK-18 SV MA STD STR45PR-IN 10P AUS4



Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 18 510 5929  |
| Specification      | SEK-18 SV MA STD STR45PR-IN 10P AUS4  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09185105929">https://b2b.harting.com/09185105929</a> |

### Identification

|                            |                |
|----------------------------|----------------|
| Category                   | Connectors     |
| Series                     | SEK Standard   |
| Element                    | Male connector |
| Description of the contact | Straight       |

### Version

|                    |                      |
|--------------------|----------------------|
| Termination method | Press-in termination |
| Connection type    | PCB to cable         |
| Number of contacts | 10                   |
| Termination length | 4.5 mm               |

### Technical characteristics

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Contact rows                       | 2                                    |
| Contact spacing (termination side) | 2.54 mm                              |
| Rated current                      | 1 A                                  |
| Insulation resistance              | $>10^9 \Omega$                       |
| Contact resistance                 | $\leq 20 \text{ m}\Omega$            |
| Limiting temperature               | -55 ... +105 °C                      |
| Insertion and withdrawal force     | $\leq 20 \text{ N}$                  |
| Performance level                  | NM 30 (S4)                           |
| Mating cycles                      | $\geq 250$                           |
| Test voltage $U_{r.m.s.}$          | 1 kV                                 |
| Isolation group                    | IIIa ( $175 \leq \text{CTI} < 400$ ) |



Pushing Performance  
Since 1945

## Technical characteristics

|               |         |
|---------------|---------|
| PCB thickness | ≥1.6 mm |
|---------------|---------|

## Material properties

|   |  |
|---|--|
| Material (insert)                         | Thermoplastic resin (PBT)                              |
| Colour (insert)                           | Grey   |
| Material (contacts)                       | Copper alloy   |
| Surface (contacts)                        | Noble metal over Ni Mating side<br>Ni Termination side |
| Layer thickness                           | ≥0.76 µm   |
| Layer thickness                           | ≥30 µinch  |
| Material flammability class acc. to UL 94 | V-0  |
| RoHS                                      | compliant  |
| ELV status                                | compliant  |
| China RoHS                                | e  |
| REACH Annex XVII substances               | Not contained  |
| REACH ANNEX XIV substances                | Not contained  |
| REACH SVHC substances                     | Not contained  |
| Requirement set with Hazard Levels        | R26  |


## Specifications and approvals

|                        |  |
|------------------------|--|
| Specifications         | IEC 60603-13   |
| UL / CSA               | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3  |

## Commercial data

|                                |  |
|--------------------------------|--|
| Packaging size                 | 40                                       |
| Net weight                     | 4.02 g                                   |
| Country of origin              | Czechia                                  |
| European customs tariff number | 85366990                                 |
| GTIN                           | 5713140026971                            |
| eCl@ss                         | 27460201 PCB connector (board connector) |

Recommended configuration of plated through holes

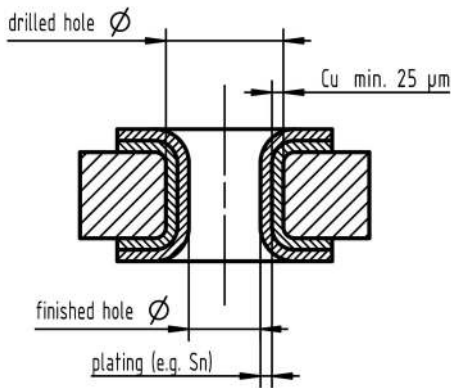

|  |                            |                           |
|--|----------------------------|---------------------------|
| Tin plated PCB (HAL)<br>acc. to EN 60352-5 | Drilled hole $\varnothing$ | 1,15-0,03 mm              |
|  | Cu                         | min. 25 $\mu\text{m}$     |
|  | Sn                         | max. 15 $\mu\text{m}$     |
|  | plated hole $\varnothing$  | 0,94 - 1,09 mm            |
| Chemical tin plated<br>PCB                 | Drilled hole $\varnothing$ | 1,15-0,03 mm              |
|  | Cu                         | min. 25 $\mu\text{m}$     |
|  | Sn                         | min. 0,8 $\mu\text{m}$    |
|  | plated hole $\varnothing$  | 1,00 - 1,10 mm            |
| Gold /Nickel plated<br>PCB                 | Drilled hole $\varnothing$ | 1,15-0,03 mm              |
|  | Cu                         | min. 25 $\mu\text{m}$     |
|  | Ni                         | 3 - 7 $\mu\text{m}$       |
|  | Au                         | 0,05 - 0,12 $\mu\text{m}$ |
| plated hole $\varnothing$                  | 1,00 - 1,10 mm             |                           |
| Silver plated PCB                          | Drilled hole $\varnothing$ | 1,15-0,03 mm              |
|  | Cu                         | min. 25 $\mu\text{m}$     |
|  | Ag                         | 0,1 - 0,3 $\mu\text{m}$   |
|  | plated hole $\varnothing$  | 1,00 - 1,10 mm            |
| Copper plated<br>PCB (OSP)                 | Drilled hole $\varnothing$ | 1,15-0,03 mm              |
|  | Cu                         | min. 25 $\mu\text{m}$     |
|  | plated hole $\varnothing$  | 1,00 - 1,10 mm            |

In addition to the hot-air-level (HAL) other pcb surfaces are getting more important. Due to their different properties, such as mechanical strength and coefficient of friction we recommend the above mentioned configuration of pcb through holes.