


Specification Control Drawing


Raychem

a) Part as supplied.



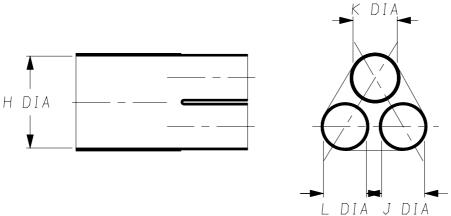

b) Part after unrestricted recovery.

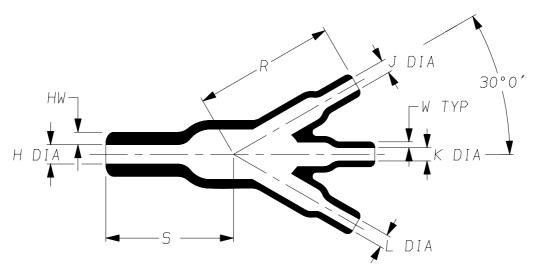

DIMENSIONS	in millimetres
CNOTCNILLIA	{in inches, for reference}

	H	+	,	J	ŀ	<	L	=	R	S	HW	W
Part No.	Min	Max	Min	Max	Min	Max	Min	Max	±10%	±10%	±20%	±20%
	a	b	a	b	a	b	a	b	b	b	b	b
462A011-*-06	13	3.8	6.0	2.5	6.0	2.5	6.0	2.5	25	21	2.3	1.3
	{0.51}	{0.15}	{0.24}	{0.10}	{0.24}	{0.10}	{0.24}	{0.10}	(0.98)	(0.83)	{0.09}	{0.05}
		#		#		#		#			#	#

This variant has reduced outlets

Modified dimensions are shown thus:- #

Copyright (!)


The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Drawn A.LILLEY. Checked Issue 2 Date November 2006 Conforms to ISO Recommendations

Approval
Design MKTG. Q.A.

Raychem Specification Control Drawin				Part Number $462 \mathrm{A011} - imes - 06$ Issue 2	
Iss.	Date	E.C.R. No.	Details of Change		
2	November 2006	CR06-DM-104	-12 Mat	erial description name changed	

(Ordering Information)

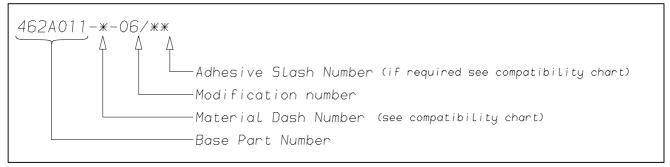

COMPATIBILITY CHART

Material Dash Number	Material Description	SPEC Number	Coating Slash Number
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42 ,/86, /180
-4	POLYOLEFIN, FLEXIBLE	RT-1304 RT-1050	/42 ,/86, /180
-6	SILICON	RT-602, RK-6706	N/A
-12	FLUOROELASTOMER, FLEXIBLE	RT-1312, RK-6712	/225
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225
-100	ZERO HALOGEN	RT-1323, RK-6717	/86, /180
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42

NOTES

1) As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.

Faraday Road, Swindon, Wiltshire, SN3 5HH England	Tyco Electronics Corporation 300, Constitution Drive, Menlo Park, CA 94025 USA Telephone (650) 361–3860 Fax: (650) 361–5579
Cage Code K1010	Cage Code 06090