
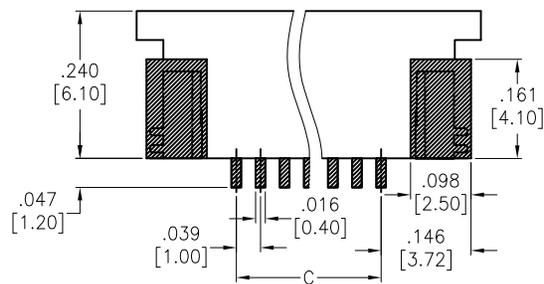

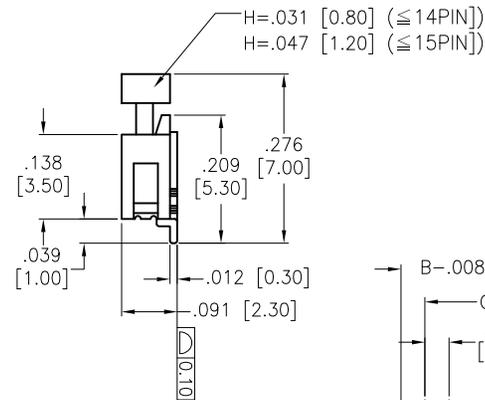
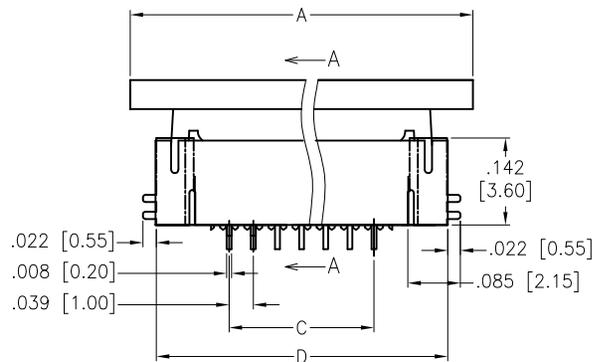
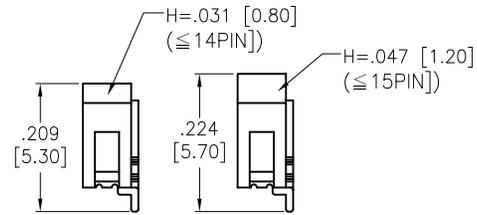


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/15	



FPC/FFC T=.012±.001 [0.30±0.03]

**SPECIFICATIONS:**

Material:  
**Insulator:** Hi-temp thermoplastic, rated UL 94V-0  
**Insulator color:** Natural  
**Actuator:** Hi-temp thermoplastic, rated UL 94V-0, Color: Black  
**Contacts:** Phosphor Bronze  
**Hold Down:** Brass, Tin plated  
**Plating:**  
 Tin over Copper underplate overall  
 Electrical:  
**Current rating:** 0.5 A max  
**Contact resistance:** 30 mohms max  
**Insulation resistance:** 100 Mohms min  
**Dielectric withstanding voltage:** 250 VAC for 1 minute  
**Temperature Rating:**  
**Operating temperature:** -25°C to +85°C  
 Environmental:  
**Lead free, RoHS compliant.**



Positions: 03 thru 61

A = .039 [1.00] x No. of Space + .323 [8.20]  
 B = .039 [1.00] x No. of Space + .087 [2.20]  
 C = .039 [1.00] x No. of Space  
 D = .039 [1.00] x No. of Space + .240 [6.10]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE  
 SIDE ENTRY, LOWER CONTACT

APPROVALS		DATE
DRAWN	HR	6/22/15
CHECKED	AY1	6/22/15
APPROVED		

SIZE	PART NO.	REV.
X	PCA-2FA-XX-HL-3	-
REF: S00165C	SCALE: NTS	SHEET 1 OF 1