

Contact insert set - VC-AR4/5M-S22222-SET - 1607335

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Contact insert set for mounting side, sleeve frame with PE, 4 fixing screws, 2-pos. contact inserts preassembled, 6 coding profiles, 2 mounting flanges



The illustration shows the 10-position version

Product Features

- Compact design
- Universal connection
- Proven COMBICON technology
- Can be keyed to prevent incorrect connection



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 62.26 g |
| Custom tariff number | 85366990 |
| Country of origin | Poland |

Technical data

General

| | |
|-----------------------------|---|
| Note | Connectors may only be connected/disconnected when under no load. |
| Connection method | Screw connection |
| | Screw connection |
| Tightening torque | 0.5 Nm ... 0.6 Nm |
| Pollution degree | 3 |
| Overvoltage category | III |
| Number of positions | 9+PE |
| Insertion/withdrawal cycles | ≥ 50 |
| Type | VC4 |

Contact insert set - VC-AR4/5M-S22222-SET - 1607335

Technical data

General

| | |
|---|---|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section | 0.2 mm ² ... 4 mm ² |
| Connection cross section AWG | 30 ... 10 |
| Stripping length of the individual wire | 7 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
|---------------------------------|-------------------|

Material data

| | |
|--|------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Tin-plated |
| Contact carrier material | PA |

Electrical characteristics

| | |
|--------------------------------|-------|
| Rated voltage (III/3) | 400 V |
| Nominal voltage U _N | 400 V |
| Rated surge voltage | 6 kV |
| | 6 kV |
| Rated current | 20 A |
| | 20 A |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260705 |
| eCl@ss 7.0 | 27440309 |
| eCl@ss 8.0 | 27440205 |
| eCl@ss 9.0 | 27440205 |

Contact insert set - VC-AR4/5M-S22222-SET - 1607335

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001121 |
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC001121 |
| ETIM 5.0 | EC000438 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details

| |
|-----|
| EAC |
|-----|

| |
|-----|
| EAC |
|-----|


Drawings

Contact insert set - VC-AR4/5M-S22222-SET - 1607335

Dimensional drawing

Dimensional drawing

Contact insert

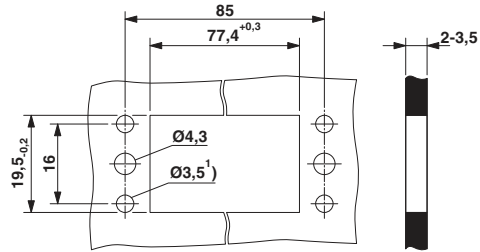

Panel cutout

Phoenix Contact 2015 © - all rights reserved
<http://www.phoenixcontact.com>