

# 240 Watts AK80A

**Total Power:** 240 Watts  
**Input Voltages:** 24V  
**No. of Outputs:** Single



## Electrical Specs

### Input

Input Range 18 to 36 VDC

### Efficiency

83% typical @ 5V;  
 87% typical @ 12V;  
 87% typical @ 15V

### Output

Load Regulation 0.3% typical down to no load  
 Line Regulation 0.1% typical  
 Noise/Ripple 100 mV typical (output below 5V)  
 2% typical (output 5V and over)  
 Up to 0.5V

Remote sense  
 Output Voltage  
 Adjust Range  
 Transient Response

Current Share Accuracy ±10% of nominal output  
 Overvoltage Protection 10% typical deviation with 300µs recovery (25-75% full load)  
 Current Limit 5% typical  
 130% nominal Vo  
 115% Io max

### Control

Voltage Adjust 90 to 110% Vo  
 Enable TTL compatible (low to enable)  
 Current Limit Adjust 20 to 100% Io rated  
 Clock Input (external sync) 3.5 to 5Vp-p @ 1MHz ± 10%  
 Clock Output (internal clock) 4.4 to 5.5Vp-p @ 1MHz ± 0.5%  
 Power Good/Identification High (Vo) = power good  
 Temperature Monitor Output 10 mV/°K (2.73V = 0°C)

### Notes

Nominal values apply with sense pins connected and other control pins unconnected.

Specifications subject to change without notice.

## Environmental

Operating temperature (baseplate):

0°C to +85°C

Storage temperature: -40°C to +105°C

Overtemperature protection: 90°C typical

MTBF: > 1 million hours (50°C baseplate)

## Safety

UL	UL 1950	E132002
CSA	CSA22.2-234	LR53982C
	CSA22.2-950	
VDE	IEC950	20366-3336-1002 & 1008
EN	60950	
CE	CEMark (LVD)	

**AMERICAS**  
 5810 Van Allen Way  
 Carlsbad, CA 92008  
 Telephone: 760-930-4600  
 Facsimile: 760-930-0698

**EUROPE**  
 Astec House, Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX, UK  
 Telephone: 44 (1384) 842-211  
 Facsimile: 44 (1384) 843-355

**ASIA**  
 Units 2111-2116, Level 21  
 Tower1, Metropiazza  
 223, Hing Fong Road  
 Fwai Fong, New Territories  
 Hong Kong  
 Telephone: 852-2437-9662  
 Facsimile: 852-2402-4426




## Ordering Information

Input Voltage	Output Voltage	Output Current	Model Number
24V	3.3V	40A	AK80A-024L-033F40
24V	5V	30A	AK80A-024L-050F30
24V	12V	14A	AK80A-024L-120F14
24V	15V	12A	AK80A-024L-150F12
24V	24V	8A	AK80A-024L-240F08

Please contact Astec for information on other output voltages, power ranges and configurations.

## Pin Assignments

Input	Output	Control Pins
31. +ve	21. +ve	1. +SENSE
32. -ve	22. +ve	2. PG/ID
	23. +ve	3. V ADJ
	24. +ve	4. -SENSE
	26. -ve	5. S COM
	27. -ve	6. C SHARE
	28. -ve	7. CLK OUT
	29. -ve	8. CLK IN
		9. ENABLE
		10. C LIM ADJ
		11. TEMP MÓN
		12. PRI AUX
		Secondary side controls
		Primary side controls

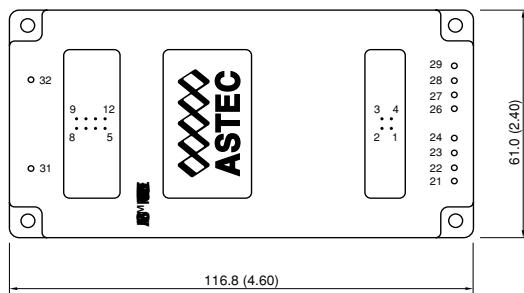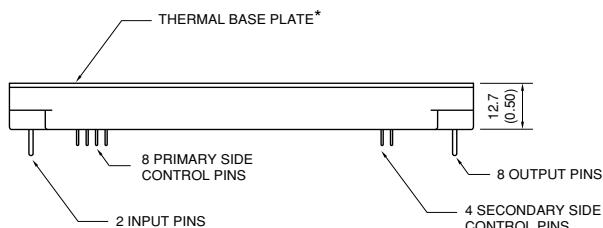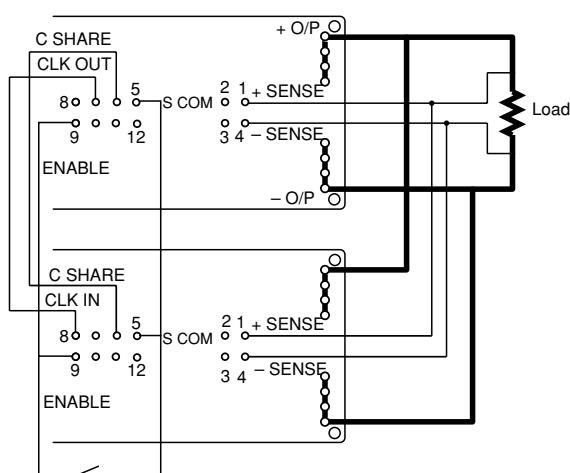

PG/ID goes high (to  $V_o$ ) to indicate power good. Resistance between PG/ID and +O/P with no power applied indicates nominal O/P voltage, where  $1\text{K}\Omega = 1\text{volt}$  (eg  $3\text{K}3 = 3.3\text{V}$ ).

Temperature monitor output (e.g. to fan control circuit)

