ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00401	Connector, 4C audio plug, 2.5xL20.8 mm, brass, nickel plated, molding style	1	
2	30-00176	Wire, 4C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00028	Overmold, PVC	1	black

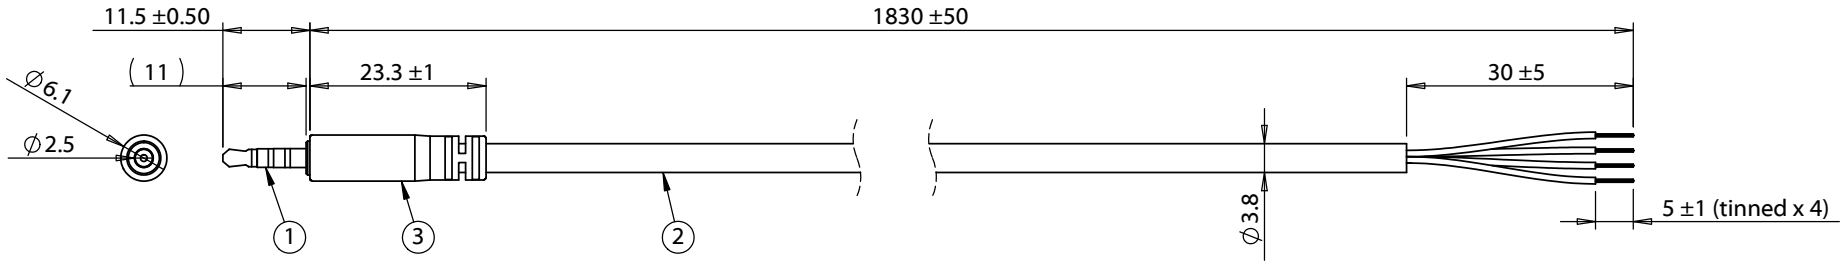



Wiring Diagram	
50-00401	wire color
A	red
B	white
C	green
D	black

Notes:
Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Revision:	Date:	Description:
A	5/10/2010	Initial release
A1	9/6/2011	Updated specification
A2	3/28/2012	Updated wire part number
A3	10/8/2014	Updated connector
A4	10/28/2016	Corrected overmold dimensions

Prepared: GL Digitally signed by GL Date: 2016.10.28 11:30:53 -07'00'

Verified: DN Digitally signed by DN Date: 2016.10.28 15:17:58 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 2.5 mm 4C 50-00401 slim audio plug to 5 mm tinned, 28 AWG, 30-00176, shielded

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-00340

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1