

SEK-18 SV MA STD STR45PR-IN 14P AUS4



Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 18 514 5929 |
| Specification | SEK-18 SV MA STD STR45PR-IN 14P AUS4 |
| HARTING eCatalogue | https://b2b.harting.com/09185145929 |

Identification

| | |
|----------------------------|----------------|
| Category | Connectors |
| Series | SEK Standard |
| Element | Male connector |
| Description of the contact | Straight |

Version

| | |
|--------------------|----------------------|
| Termination method | Press-in termination |
| Connection type | PCB to cable |
| Number of contacts | 14 |
| Termination length | 4.5 mm |

Technical characteristics

| | |
|------------------------------------|--------------------------------------|
| Contact rows | 2 |
| Contact spacing (termination side) | 2.54 mm |
| Rated current | 1 A |
| Insulation resistance | $>10^9 \Omega$ |
| Contact resistance | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature | -55 ... +105 °C |
| Insertion and withdrawal force | $\leq 28 \text{ N}$ |
| Performance level | NM 30 (S4) |
| Mating cycles | ≥ 250 |
| Test voltage $U_{r.m.s.}$ | 1 kV |
| Isolation group | IIIa ($175 \leq \text{CTI} < 400$) |



Technical characteristics

| | |
|---------------|---------|
| PCB thickness | ≥1.6 mm |
|---------------|---------|

Material properties

| | |
|---|--|
| Material (insert) | Thermoplastic resin (PBT) |
| Colour (insert) | Grey |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Noble metal over Ni Mating side Ni Termination side |
| Layer thickness | ≥0.76 µm |
| Layer thickness | ≥30 µinch |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |


Specifications and approvals

| | |
|------------------------|--|
| Specifications | IEC 60603-13 |
| UL / CSA | UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079 |
| Railway classification | F3/I3 |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Country of origin | Czechia |
| European customs tariff number | 85366990 |
| GTIN | 5713140027916 |
| eCl@ss | 27460201 PCB connector (board connector) |

Recommended configuration of plated through holes

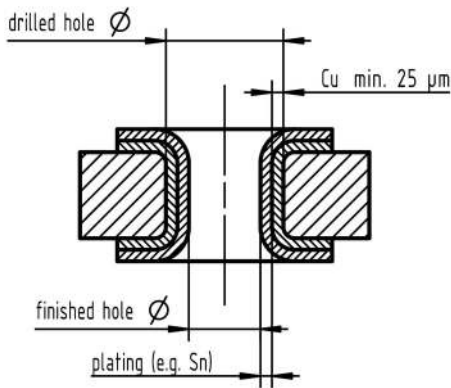

| | | |
|--|----------------------------|---------------------------|
| Tin plated PCB (HAL) acc. to EN 60352-5 | Drilled hole \varnothing | 1,15-0,03 mm |
| | Cu | min. 25 μm |
| | Sn | max. 15 μm |
| | plated hole \varnothing | 0,94 - 1,09 mm |
| Chemical tin plated PCB | Drilled hole \varnothing | 1,15-0,03 mm |
| | Cu | min. 25 μm |
| | Sn | min. 0,8 μm |
| | plated hole \varnothing | 1,00 - 1,10 mm |
| Gold /Nickel plated PCB | Drilled hole \varnothing | 1,15-0,03 mm |
| | Cu | min. 25 μm |
| | Ni | 3 - 7 μm |
| | Au | 0,05 - 0,12 μm |
| Silver plated PCB | Drilled hole \varnothing | 1,15-0,03 mm |
| | Cu | min. 25 μm |
| | Ag | 0,1 - 0,3 μm |
| | plated hole \varnothing | 1,00 - 1,10 mm |
| Copper plated PCB (OSP) | Drilled hole \varnothing | 1,15-0,03 mm |
| | Cu | min. 25 μm |
| | plated hole \varnothing | 1,00 - 1,10 mm |

In addition to the hot-air-level (HAL) other pcb surfaces are getting more important. Due to their different properties, such as mechanical strength and coefficient of friction we recommend the above mentioned configuration of pcb through holes.