
## **CUSTOMER DRAWING**

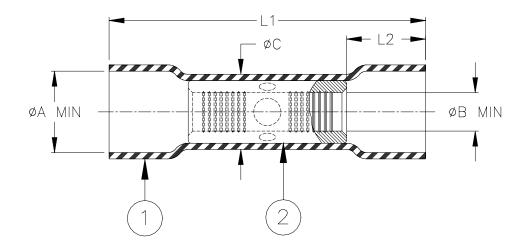

Product Name	Color	Marking	Size Range mm <sup>2</sup> (AWG)	L1 ±2.0 (L1 ±0.08)	L2 min	(a)	(b)	øB min	øC ±0.3 (±0.012)	Delphi Packard No.
D-406-2004	Red	20-18 AWG	0.50 - 1.0 (20 - 18)	37.0 (1.50)	9.0 (0.35)	4.3 (0.170)	1.5 (0.059)	1.5 (0.059)	4.7 (1.850)	12089189
D-406-2005	Blue	16-14 AWG	1.5 - 2.5 (16 - 14)	37.0 (1.50)	9.0 (0.35)	4.9 (0.193)	2.0 (0.079)	2.0 (0.079)	5.6 (0.220)	12089190
D-406-2006	Yello w	12-10 AWG	3.0 - 6.0 (12 - 10)	42.0 (1.65)	10.0 (0.39)	6.3 (0.248)	3.0 (0.118)	3.2 (0.126)	7.2 (0.283)	12089191

<sup>\*</sup>øA: (a) As received (b) After recovery

## **MATERIAL**

- 1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyamide (nylon) with hot-melt adhesive lining.
- 2. CRIMP BARREL: Tin-plated copper alloy.

BASE METAL: Copper alloy C11000 per ASTM B-152.

PLATING: Tin-plated per ASTM B545, Class B.

## **APPLICATION**

- 1. These parts are designed to make an environmentally sealed in-line splice between two wires in the size range listed, and having an insulation diameter between the (a) and (b) limits of ØA\*.
- 2. Wires are to be stripped between 7.5 (0.295) and 10.0 (0.394).
- 3. Crimping must be done with a Raychem AD-1522 crimp tool or equivalent. Install per RPIP-684-00, sleeve must be recovered by heating to obtain environmental protection.
- 4. This product will meet the requirements of Delphi-Packard Specification 12089192.

<b>≇</b> Tyc	o Electi	onics	300 Constitution Dr Menlo Park, CA 94025, U.S.A.	DELPHI-PACKARD CRIMP SPLICE, ENVIRONMENT RESISTANT					
	pecified dimensions s are shown in bracke		Raychem Devices	D-406-2004/-2005/-2006					
TOLERANCES:	ANGLES: N/A		Electronics reserves the right to						
0.00 N/A			g at any time. Users	REV:		DATE:			
0.0 N/A ROUGHNESS		should evaluate the	e suitability of the	Н		August 7, 2008			
0 N/A	0 N/A IN MICRON		product for their application.			71ugust 7, 2000			
REVISED BY:	CAGE CODE:	REPLACES:	ECO NUMBER:	SCALE:		SIZE:	SHEET:		
UNGUYEN	06090	D040091	ECO-08-019511	NTS		Α	1 of 1		