


1 2 3 4 5 6 7

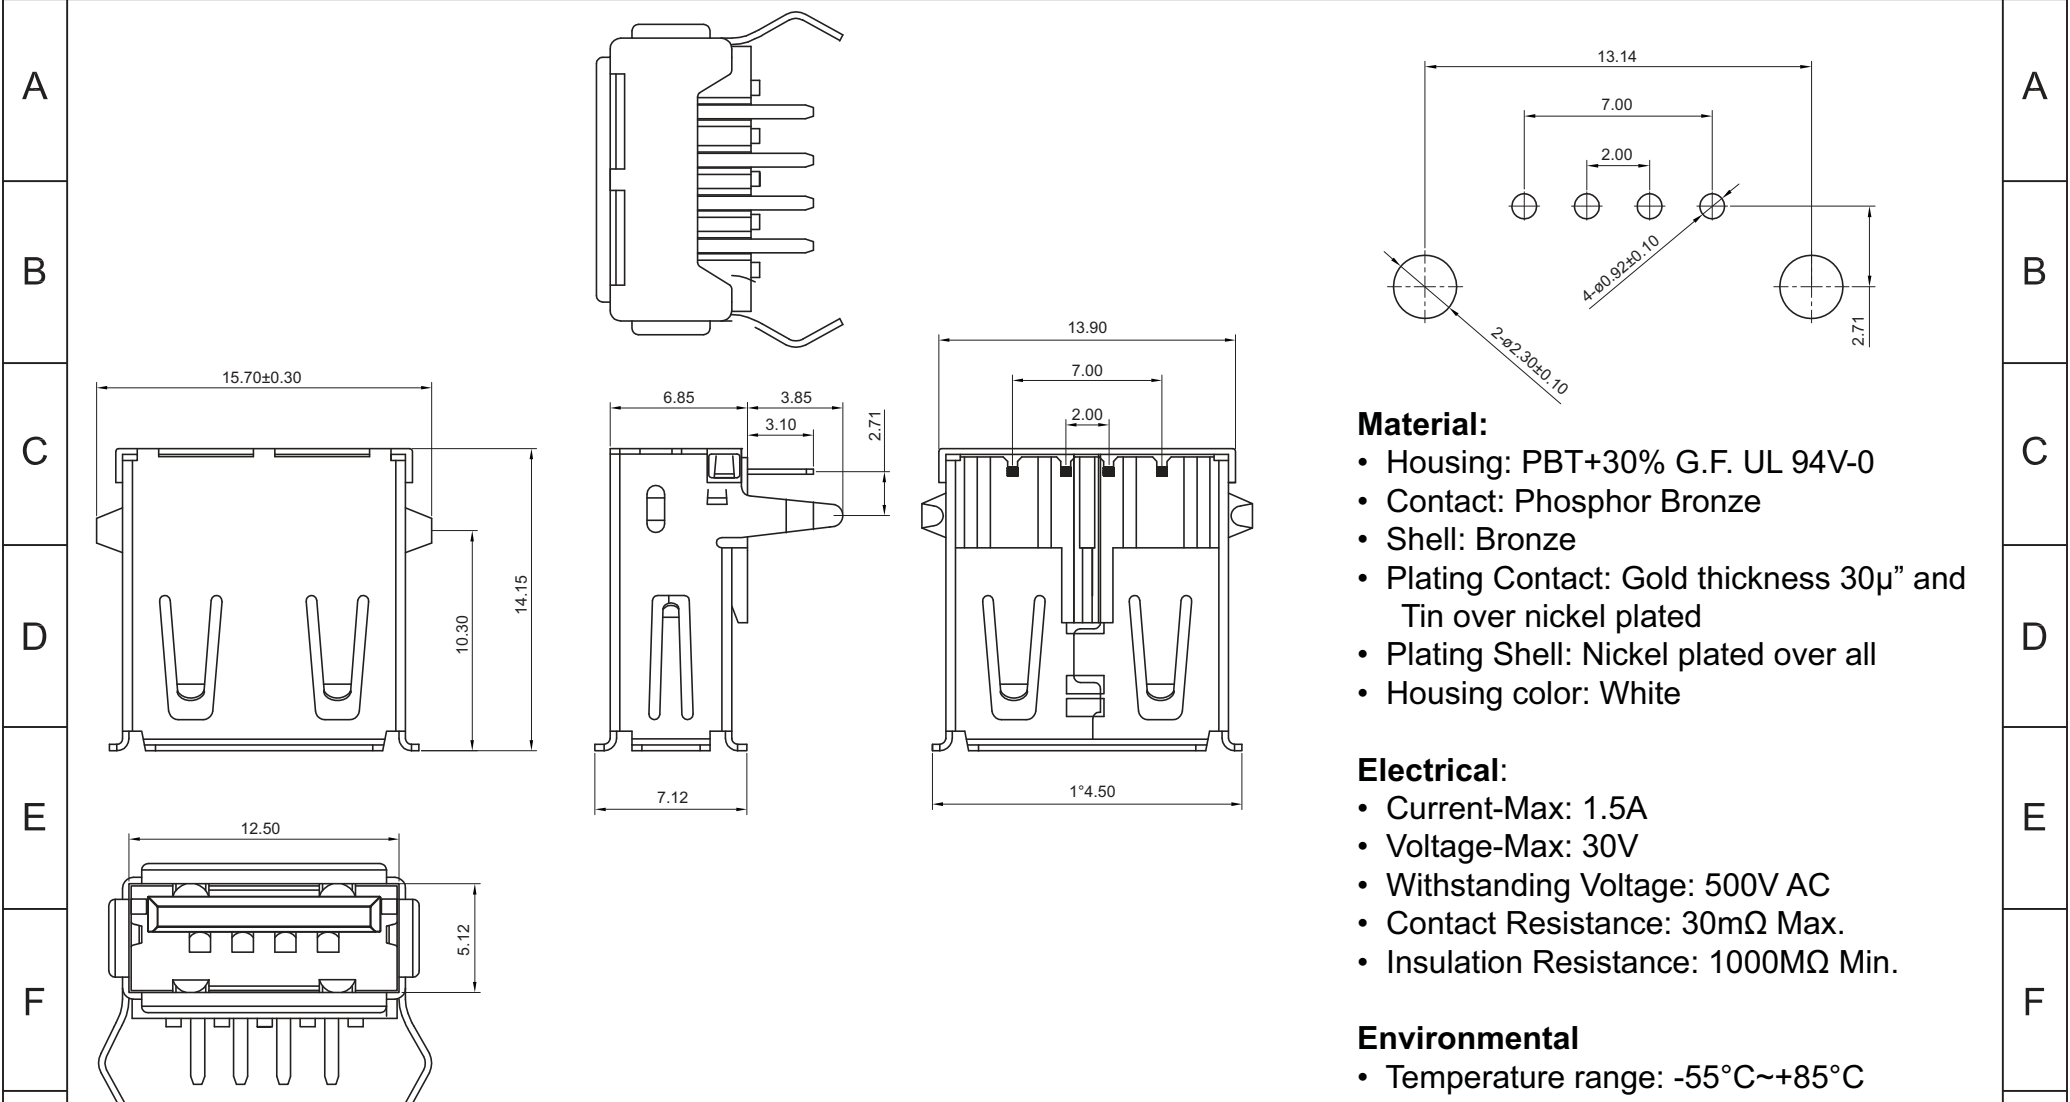

Material:

- Housing: PBT+30% G.F. UL 94V-0
- Contact: Phosphor Bronze
- Shell: Bronze
- Plating Contact: Gold thickness 30µ” and Tin over nickel plated
- Plating Shell: Nickel plated over all
- Housing color: White

Electrical:

- Current-Max: 1.5A
- Voltage-Max: 30V
- Withstanding Voltage: 500V AC
- Contact Resistance: 30mΩ Max.
- Insulation Resistance: 1000MΩ Min.

Environmental

- Temperature range: -55°C~+85°C

Unit: mm



Scale	1:1
TOLERANCE	
X.X	±0.38
X.XX	±0.25
X.XXX	±0.13
X.X°	±3.0°
X.XX°	±1.0°
X.XXX°	±0.5°

Id.	Modification	Date	Name

	Date	Name	Title
	30.11.12	Wilson	USB 2.0 A/F DIP 90° Connector for PCB Mount, 30µ” Gold, White
	30.11.12	Groll	ASSMANN WSW-No.
			AU-Y1005-2-R
			Drawing-No.
			rev00
			Sheet
			1/1



G H 1 2 3 4 5 6 7