


TE Internal #: 1924678-1 PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [. 1 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Black View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > Press-Fit & SMT Header

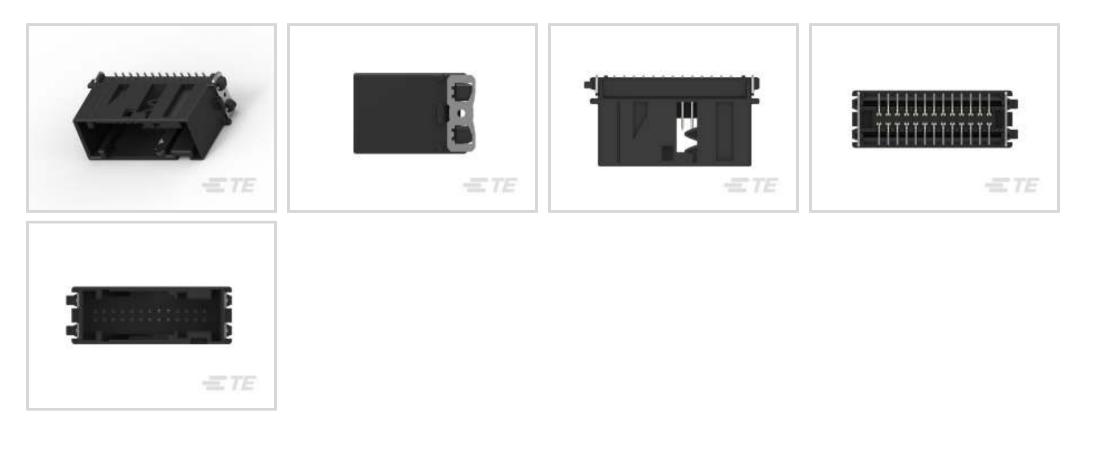

Connector System: Wire-to-Board

Number of Positions: 26

Centerline (Pitch): 2.54 mm [.1 in]

Sealable: No

PCB Mount Orientation: Vertical

All Press-Fit & SMT Header (32)

Features

Product Type Features

Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Signal Positions	26
Number of Positions	26
PCB Mount Orientation	Vertical
Number of Rows	2
Body Features	
Primary Product Color	Black

S For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Black



Connector & Keying Code	AE
Contact Features	
Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material	Tin
Termination Features	
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
Mounting Holes	Without
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	With

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Length	44.4 mm[1.748 in]
Connector Width	15.9 mm[.626 in]
Profile Height from PCB	23.95 mm[.943 in]
Usage Conditions	
Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C[149 °F][158 °F][167 °F][176 °F][185 °F] [194 °F][212 °F]
Operating Temperature Range	-40 - 100 °C[-40 - 212 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal
Packaging Features	
Packaging Type	Tube

PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Black



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

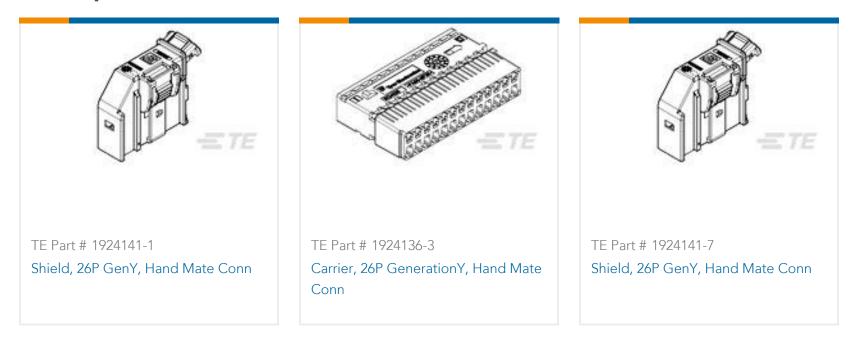

Customers Also Bought

PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Black



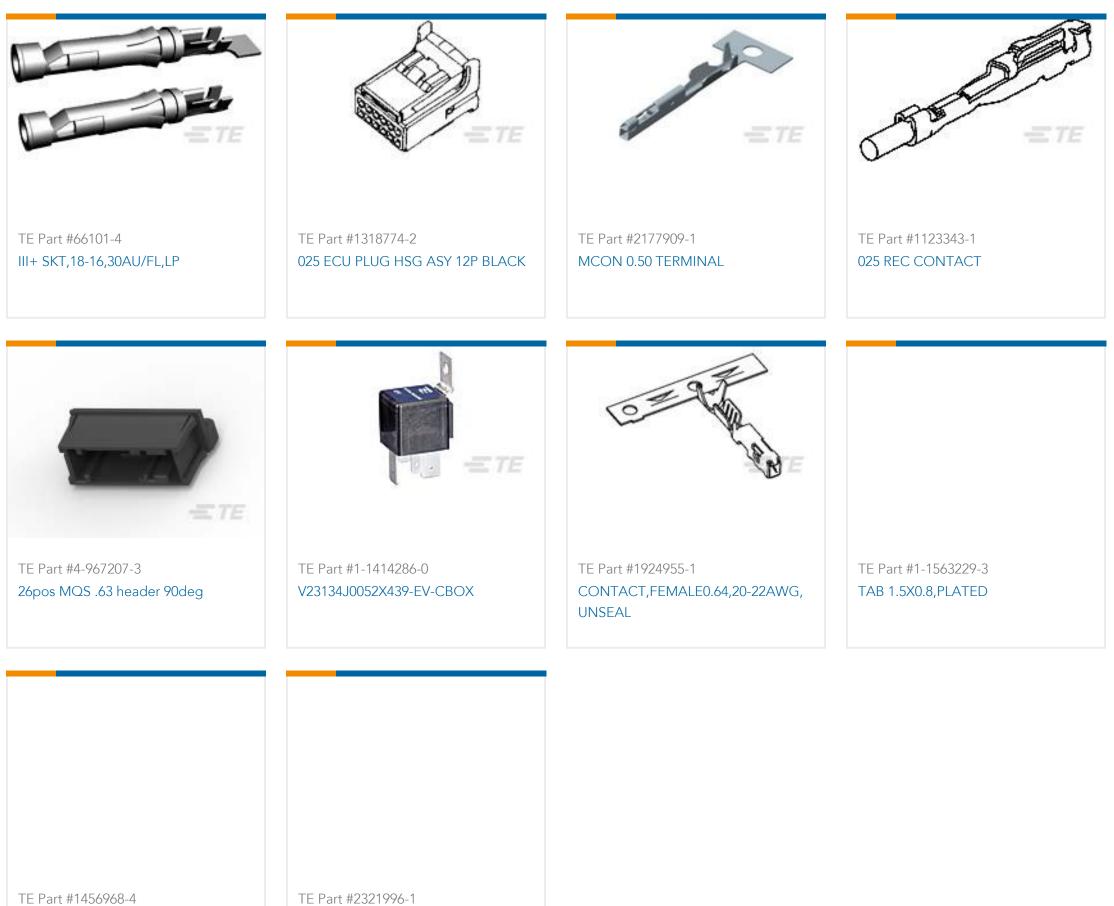

CONTACT, FEMALE, 0.64, 18 AWG, AG ASSEMBLY V-TYPE

Documents

CAD Files

Customer View Model

ENG_CVM_1924678-1_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_1924678-1_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_1924678-1_A1.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Instruction Sheets

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Surface Mount, Signal, Black



Instruction Sheet (U.S.)

English