


DRAWING NO
C - 210931

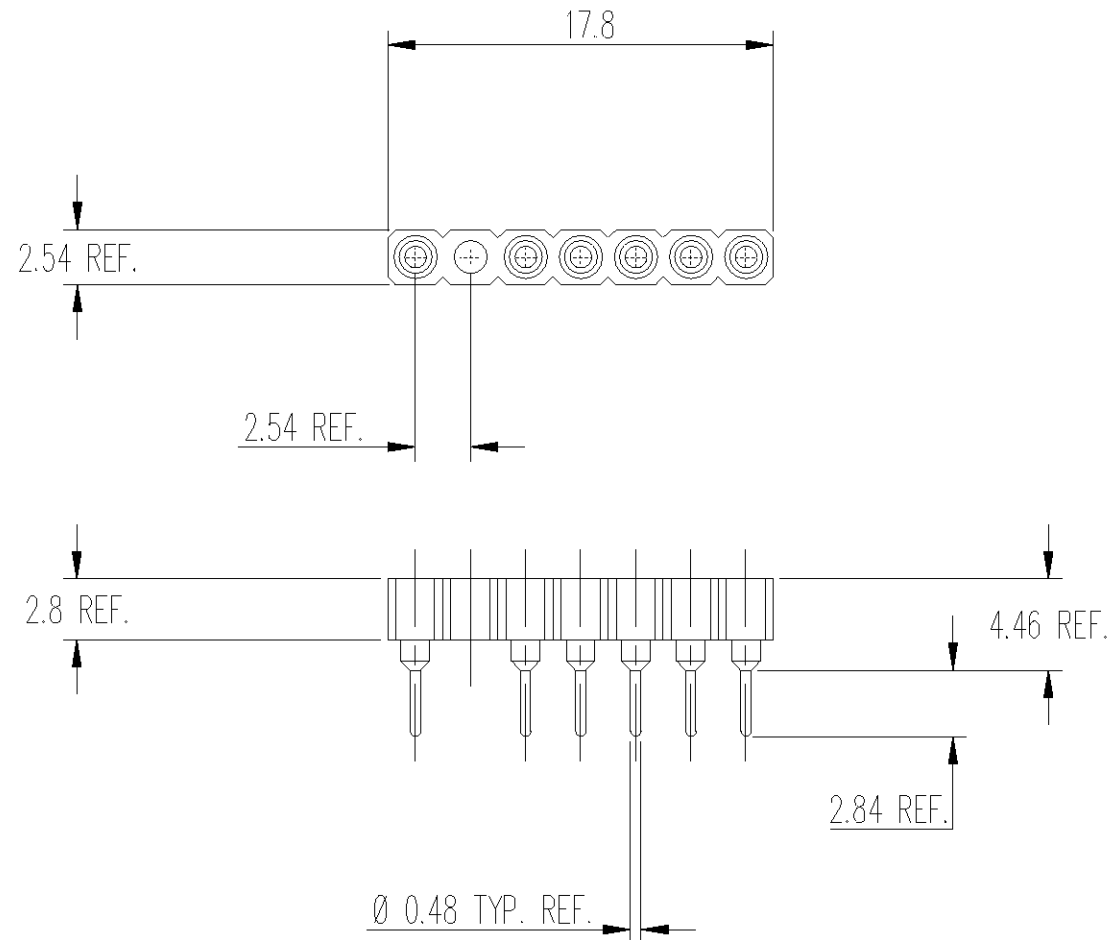

NOTE :

1. MATERIAL
 - INSULATOR : GLASSFILLED THERMOPLASTIC POLYESTER
 - SLEEVE : BRASS
 - CLIP : STAMPED BERYLLIUM COPPER
2. INNER SPRING CONTACT ACCEPT \varnothing 0.40 TO 0.56 OR RECTANGULAR PIN 0.25 x 0.45
3. MECHANICAL DATA WITH A \varnothing 0.43 TEST PIN :
 - INSERTION FORCE : 3.1N MAX.
 - EXTRACTION FORCE : 0.5N MIN.
 - MECHANICAL LIFE : 100 CYCLES MIN.

SOLDER TAIL PLATING	INNER CONTACT PLATING	DASH NUMBER	SOLDER TAIL PLATING	INNER CONTACT PLATING	DASH NUMBER
5 μ m Sn OVER 2-3 μ m Ni (STANDARD)	0.25 μ m 18c. Au	-1	0.25 μ m Au OVER 2-3 μ m Ni	0.25 μ m 18c. Au	1- -1
	0.50 μ m 18c. Au	-2		0.50 μ m 18c. Au	1- -2
	0.75 μ m 18c. Au	-3		0.75 μ m 18c. Au	1- -3
	0.75 μ m 24c. Au	-4		0.75 μ m 24c. Au	1- -4
	5 μ m MIN. Sn	-5			
	0.1 μ m FLASH 24c. Au	-6		0.1 μ m FLASH 24c. Au	1- -6

DIMENSIONS	mm						DRAWN	24 SEP 98	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM DSM SWITZERLAND.			
						S.CHANDEVAVULT	24 SEP 98					
						CHECKED	24 SEP 98					
						A. BOLIS						
SURFACE TEXTURE	N7 (✓)	A	EBD0-0463-04	RS	12/04	MG	APPROVED	26 OCT 98	NAME SELECTIVELY 6/7 POS SIP IC SOCKET 2.54 CENTERLINE			
CONCENTRICITY	0.15	01	NEW CAD DRAWING				CUSTOMER DRAWING					
PRODUCT SPEC.		P	REV	ECN	DRWN	DATE	APVD	FOR REFERENCE ONLY				
AMP		DSM DECOLLETAGE SA SAINT-MAURICE CH 1890 SAINT-MAURICE (VS)					LOC	SCALE	SIZE	DRAWING NO	SHEET	REVISION
WAS 2002-06/07-CC							EK	2/1	A4	C - 210931	1 of 1	A