



Electrical Specifications

Center Frequency: 420 MHz
3dB Bandwidth: 32 MHz
Passband: 404-436 MHz
Insertion Loss: 3.0 dB Max @ 420 MHz
VSWR (In and Out): 1.25:1 Max @ 420 MHz
Stopbands: >40 dB @ 380 and 475 MHz
 >60 dB @ 350 and 515 MHz
 >20 dB @ 390 and 490 MHz


Mechanical

Connector Type: RF Pins
Dimensions: 1.00 x 0.50 x 0.40 Inches

Environmental


Operating Temperature: -20 to +70° C
Storage Temperature: -45 to +85° C

Outline Drawing:

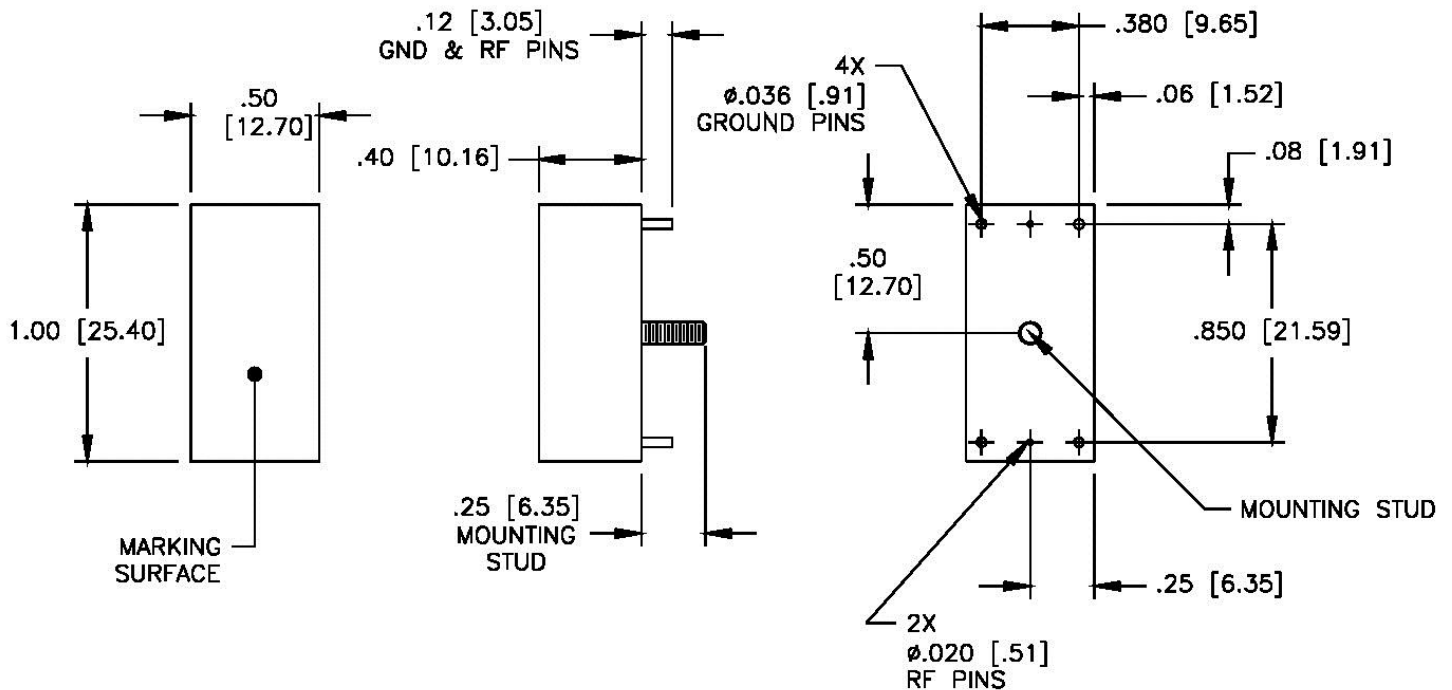



Response Plot:

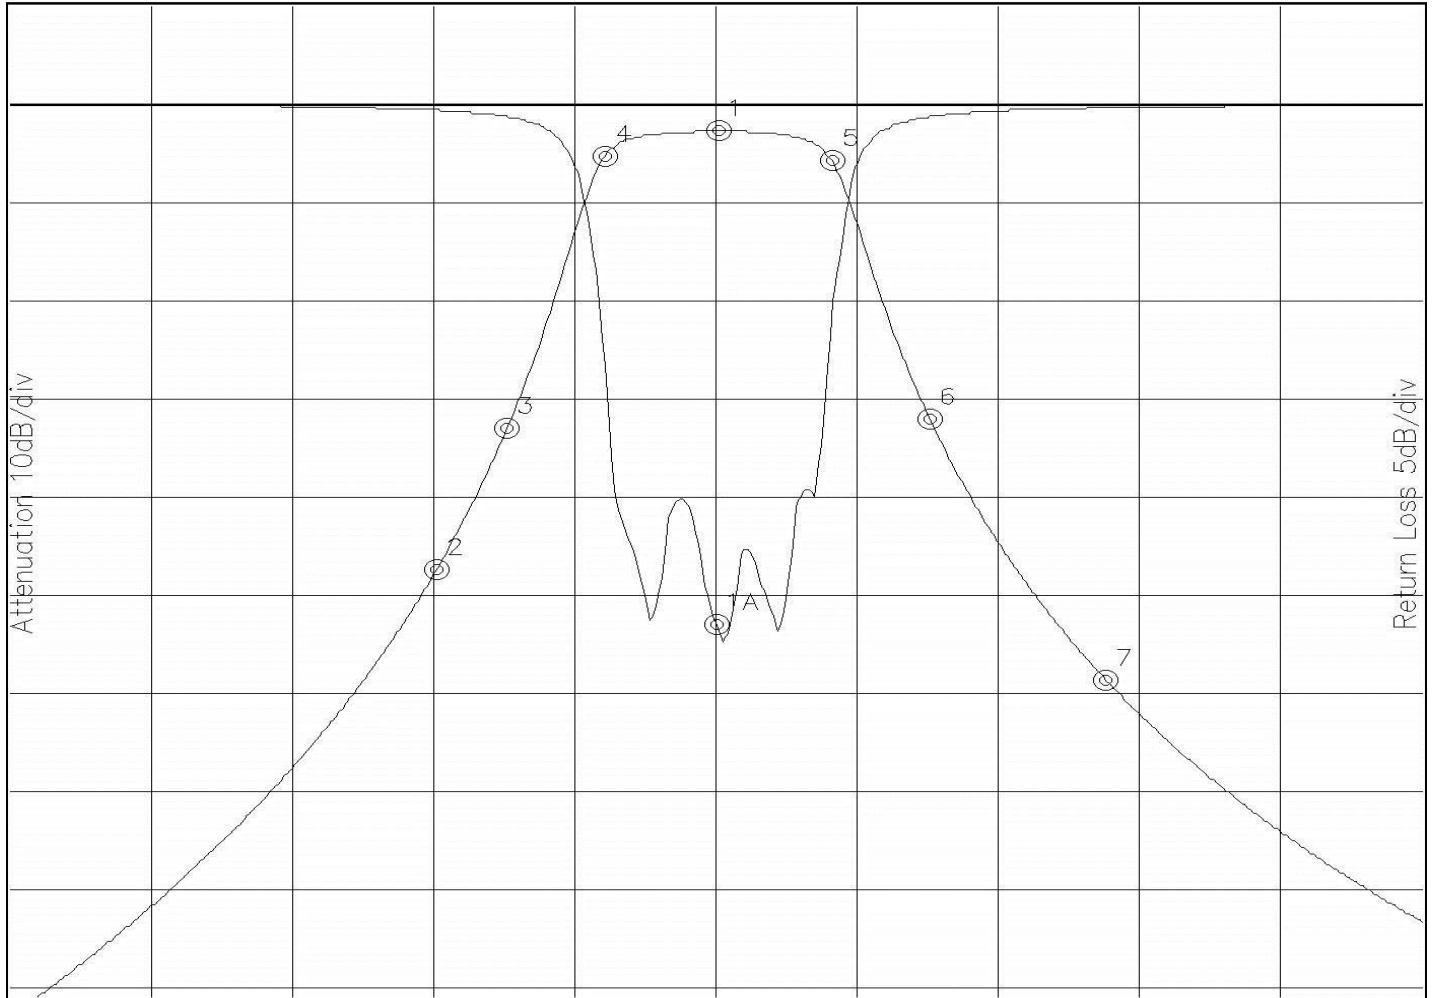

Attenuation Start: 320.0MHz Stop: 520.0MHz

Return Loss Start: 320.0MHz Stop: 520.0MHz

- Marker 1 Freq 420.16MHz Atten -2.655dB
- Marker 2 Freq 380.09MHz Atten -47.277dB
- Marker 3 Freq 390.11MHz Atten -32.910dB
- Marker 4 Freq 404.00MHz Atten -5.159dB
- Marker 5 Freq 436.31MHz Atten -5.757dB
- Marker 6 Freq 450.21MHz Atten -32.026dB
- Marker 7 Freq 475.08MHz Atten -58.393dB

Marker 1A Freq 419.83MHz Ret Loss -26.406dB

Note: This is a simulation plot. Actual results may differ once the product is implemented.